

**MILBANK®**  
ENERGY AT WORK



# RECREATIONAL VEHICLE PARK

**Electrical Products and Accessories**



Meter mounting  
equipment approved  
for use with RV products.

# Milbank Overview


## *Energy At Work Since 1927*

Milbank designs and manufactures electrical solutions that move and manage power for the residential, commercial, industrial, utility and transportation sectors. With nearly a century of expertise in electrical engineering design and manufacturing, Milbank's portfolio includes metering equipment, enclosures and enclosed controls. Founded in 1927, Milbank is a family-owned, American manufacturer headquartered in Kansas City, Mo. For more information, please visit [milbankworks.com](http://milbankworks.com).



### Metering

Milbank has been a market leader in electrical metering equipment, setting the standard in quality, for 95 years and counting. There are hundreds of available configurations, including a range of sizes as well as various knockout, terminals and bypass options. Products also have a variety of selections for hubs, locks and connectors. Milbank has the socket you need with thousands of active products to meet your utility's requirements.

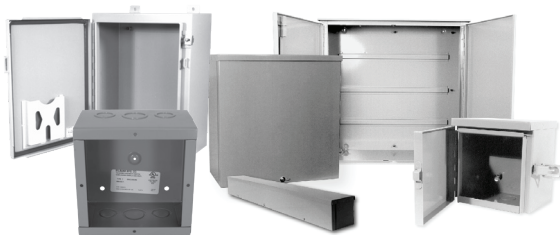

### Enclosures

Milbank's line of enclosures include commercial junction boxes, panel mount enclosures, transformer cabinets, wireways and troughs. Enclosures are designed to meet or exceed industry standards. Each one is constructed with high-quality materials and built with superior craftsmanship. Each unit is engineered to protect controls and equipment from dust, dirt and other harmful elements, based on various NEMA ratings.



### Enclosed Controls

Milbank doesn't just build empty enclosures, we can design and craft the entire package. Our enclosed controls are custom control equipment, engineered and built to your exact specifications. Milbank enclosed controls are an attractive, secure, easy-to-install and cost-effective solution. These units can replace unsightly and insufficient strut and backboard structures when underground remote site power distribution and control equipment is required.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

## Millennium Series RV Power Outlets

Unmetered Surface-Mount Power Outlets.....	4-5
Metered Surface-Mount Power Outlets.....	6-7
Unmetered Power Outlet Pedestals .....	8-9
Metered Power Outlet Pedestals .....	10-13
Accessories and Replacement Parts.....	14-19

## Voyager Series RV Pedestal Power Outlets

Product Specifications and Details .....	20-21
Accessories and Replacement Parts.....	22-23

## Miscellaneous

Dry Type Transformers .....	24-25
Pad-mount Panelboards.....	26
Terminal Boxes .....	27
Energization Information .....	28
Index.....	29

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




# 4 Millennium Series Surface-Mount Power Outlets

125 Amps | Unmetered | 120/240V



U5000-XL-75

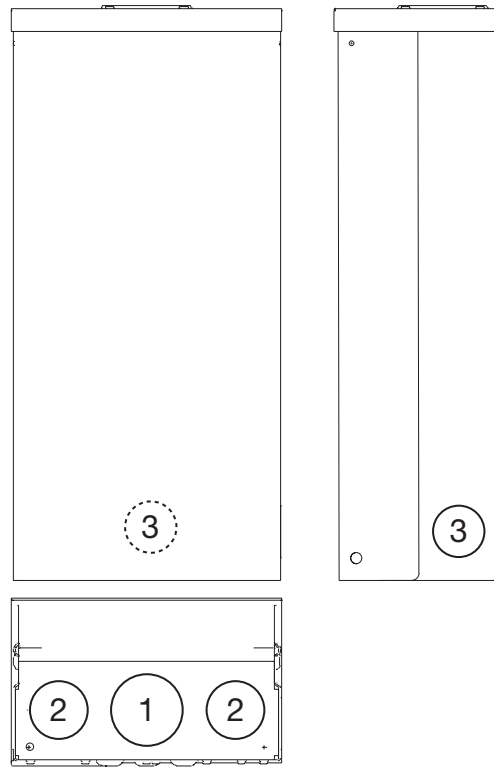

## Specifications

- UL-listed 125 Amps, 120/240 VAC—1Ø power outlet.
- Short circuit current withstand rating 10,000 RMS symmetrical amperes.
- NEMA 3R welded enclosure for durable outdoor use.
- Enclosure constructed with galvanized 16-gauge steel.
- ANSI 61 gray polyester powder coat finish.
- Convenient concentric knockout configurations and mounting embosses.
- Hub opening with closure plate allows for meter retrofit.
- Wire terminations accept copper or aluminum conductors for loop feed wiring.
- Line: (2) 1/0-#12      Ground: (2) 1/0-#14 and (4) #6-#14      Neutral: (2) 1/0-#14 and (4) #6-#14
- Six circuit plated copper interior accepts standard plug-in type circuit breakers. Rated up to 125 Amps.
- Three position self-grounded receptacle bridge accepts most standard NEMA receptacles with mounting plates.
- Components factory wired with stranded copper wire.
- Lockable hinge cover and deadfront are removable for installation and maintenance. Stay-open hinge cover has safety interlock on deadfront. Deadfront cover must be removed before hinge cover can be removed.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

# Millennium Series Surface-Mount Power Outlet 5

125 Amps | Unmetered | 120/240V

## 125 Amps | Surface-Mount Power Outlets

Catalog Number	Receptacle Configuration	Circuit Breaker Configuration	Loop Feed	Connectors - Line	Dimensions			Knockouts		
					D"	W"	H"	1	2	3
U5000-XL	—	—	Yes	(2) 1/0-#12	5½	8⅞	19¼	2	1½	1¼
U5000-XL-332	A	W	Yes	(2) 1/0-#12	5½	8⅞	19¼	2	1½	1¼
U5000-XL-41	B	X	Yes	(2) 1/0-#12	5½	8⅞	19¼	2	1½	1¼
U5000-XL-55	C	Y	Yes	(2) 1/0-#12	5½	8⅞	19¼	2	1½	1¼
U5000-XL-75	D	Z	Yes	(2) 1/0-#12	5½	8⅞	19¼	2	1½	1¼

### Receptacle Configurations

A	B	C	D
(2) TT30R, (1) 5-20R GFI	(1) TT30R, (1) 5-20R GFI	(1) 14-50R, (1) 5-20R GFI	(1) 14-50R, (1) TT30R, (1) 5-20R GFI

### Circuit Breaker Configurations

W	X	Y	Z
(2) 30A, 1P, 120V (1) 20A, 1P, 120V	(1) 30A, 1P, 120V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 30A, 1P, 120V (1) 20A, 1P, 120V

### Notes


- 20 Amps GFI receptacles are weather resistant and tamper resistant.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



# 6 Millennium Series Surface-Mount Power Outlets

125 Amps | Metered | 120/240V

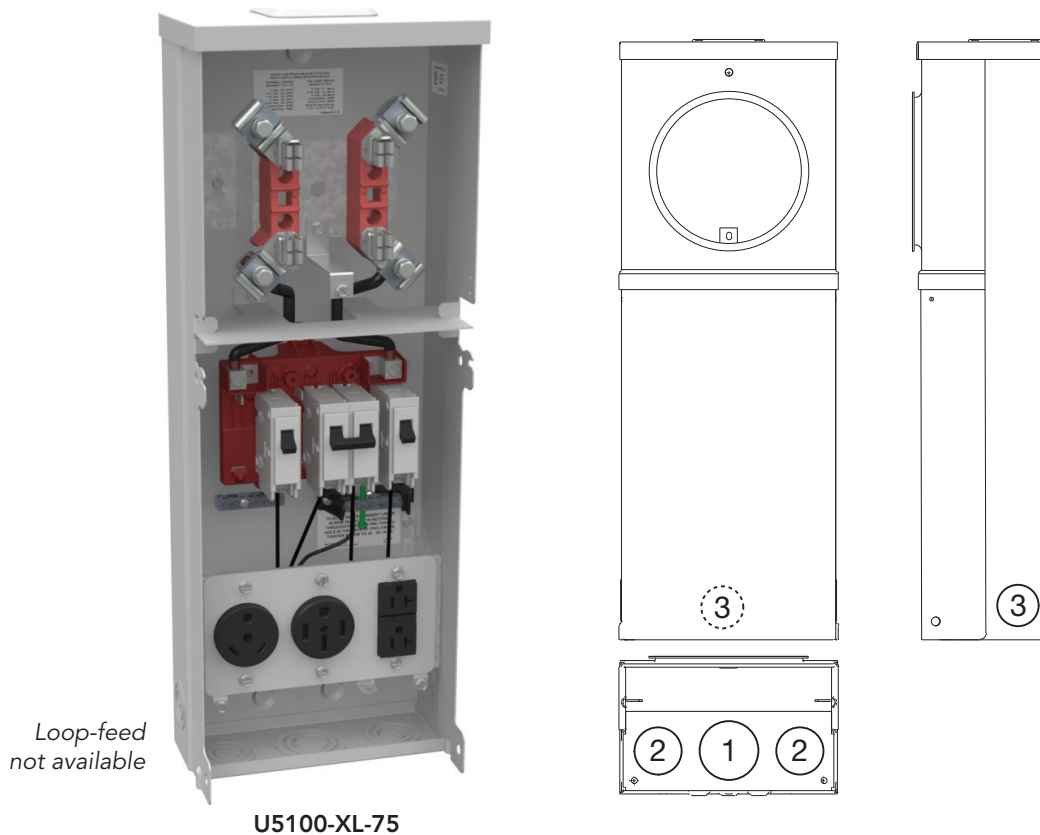

## Specifications

- UL-listed 125 Amps, 120/240 VAC—1Ø power outlet.
- Short circuit current withstand rating 10,000 RMS symmetrical amperes.
- NEMA 3R welded enclosure for durable outdoor use.
- Enclosure constructed with galvanized 16-gauge steel.
- ANSI 61 gray polyester powder coat finish.
- Convenient concentric knockout configurations and mounting embosses.
- Hub opening with closure plate.
- Wire terminations accept copper or aluminum conductors for loop feed wiring. Line: (2) #6-350 kcmil per phase. Ground: (2) #14-2/0, Neutral: (2) #6-350.
- Six circuit plated copper interior accepts standard plug-in type circuit breakers. Rated up to 125 Amps.
- Three position self-grounded receptacle bridge accepts most standard NEMA receptacles with mounting plates.
- Four terminals, ring type meter socket with aluminum sealing ring. Ringless type meter socket available. Use U5101 prefix.
- Components factory wired with stranded copper wire.
- Lockable hinge cover and deadfront are removable for installation and maintenance. Stay-open hinge cover has safety interlock on deadfront. Deadfront must be removed before hinge cover can be removed.
- LED or fluorescent site light kits available. Factory or field-installable. See accessories page.
- Unit weight: 26 lbs.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




# Millennium Series Surface-Mount Power Outlets 7

125 Amps | Metered | 120/240V




## 125 Amps | Surface-Mount Power Outlets

Catalog Number	Meter Type	Receptacle Configuration	Circuit Breaker Configuration	Loop Feed	Connectors - Line	Dimensions			Knockouts		
						D"	W"	H"	1	2	3
U5100-XL	Ring Type	—	—	No	#6-250	5½	8⅞	25	2	1½	1¼
U5101-XL	Ringless	—	—	No	#6-250	5½	8⅞	25	2	1½	1¼
U5100-XL-41	Ring Type	A	X	No	#6-250	5½	8⅞	25	2	1½	1¼
U5100-XL-55	Ring Type	B	Y	No	#6-250	5½	8⅞	25	2	1½	1¼
U5100-XL-75	Ring Type	C	Z	No	#6-250	5½	8⅞	25	2	1½	1¼

### Receptacle Configurations

A	B	C
		
(1) TT30R, (1) 5-20R GFI	(1) 14-50R, (1) 5-20R GFI	(1) 14-50R, (1) TT30R, (1) 5-20R GFI

### Circuit Breaker Configurations

X	Y	Z
		
(1) 30A, 1P, 120V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 30A, 1P, 120V (1) 20A, 1P, 120V

### Notes

- 20 Amps GFI receptacles are weather resistant and tamper resistant.
- 20 Amps GFI required at each RV site by UL and NEC 551-71.
- LED or fluorescent site light kits available. Factory or field-installable. See accessories page.
- Contact factory for additional configurations not shown here.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




# 8 Millennium Series Power Outlet Pedestals

125 Amps | Unmetered | 120/240V



U5200-XL-75

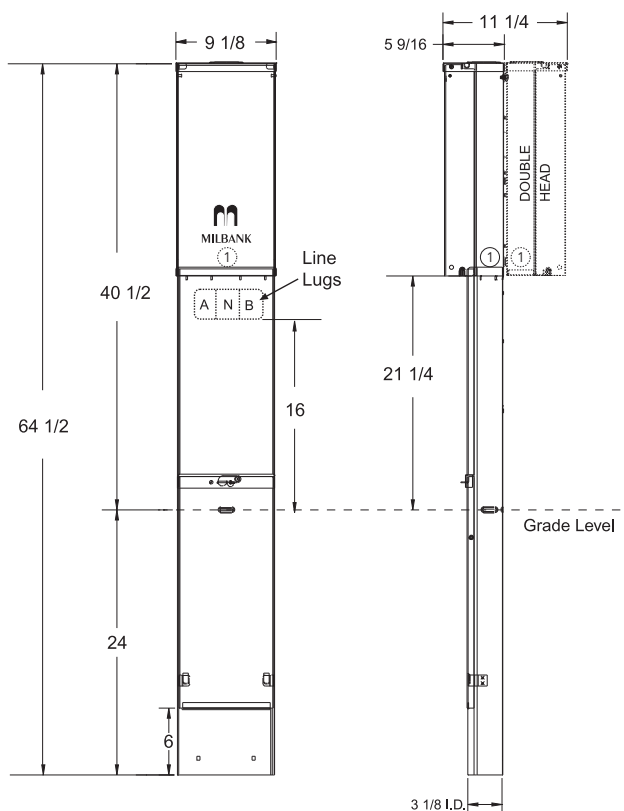

## Specifications

- UL-listed 125 Amps, 120/240 VAC—1Ø power outlet.
- Short circuit current withstand rating 10,000 RMS symmetrical amperes.
- NEMA 3R welded enclosure for durable outdoor use.
- Enclosure constructed with galvanized 16-gauge steel.
- Direct burial or pad-mounted post constructed with 16-gauge galvanized steel. Two removable front covers for ease of installation. Accepts up to three 2 1/2" conduits.
- ANSI 61 gray polyester powder coat finish.
- Convenient concentric knockout configurations.
- Hub opening with closure plate allows for meter retrofit.
- Wire terminations accept copper or aluminum conductors for loop feed wiring. Line: (2) #6-350 kcmil per phase, Ground: (2) #14-2/0, Neutral: (2) #6-350
- Six circuit plated copper interior accepts standard plug-in type circuit breakers. Rated up to 125 Amps.
- Three position self-grounded receptacle bridge accepts most standard NEMA receptacles with mounting plates.
- Components factory wired with stranded copper wire.
- Lockable hinge cover and deadfront are removable for installation and maintenance. Stay-open hinge cover has safety interlock on deadfront. Deadfront must be removed before hinge cover can be removed.
- LED or fluorescent site light kits available. Factory or field-installable. See accessories page.
- Unit weight — single: 48 lbs., double: 70 lbs.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



# Millennium Series Power Outlet Pedestals 9

125 Amps | Unmetered | 120/240V

## 125 Amps | Unmetered Power Outlet Pedestals

Catalog Number	Mounting Type	Powerheads	Receptacle Configuration	Circuit Breaker Configuration	Loop Feed	Connectors (Line)	Dimensions			Knockouts
							D"	W"	H"	
U5200-XL	Direct Burial	Single	—	—	Yes	#6-350	5 <sup>9</sup> / <sub>16</sub>	8 <sup>11</sup> / <sub>16</sub>	64 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>4</sub>
U5200-XL-332	Direct Burial	Single	A	W	Yes	#6-350	5 <sup>9</sup> / <sub>16</sub>	8 <sup>11</sup> / <sub>16</sub>	64 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>4</sub>
U5200-XL-41	Direct Burial	Single	B	X	Yes	#6-350	5 <sup>9</sup> / <sub>16</sub>	8 <sup>11</sup> / <sub>16</sub>	64 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>4</sub>
U5200-XL-55	Direct Burial	Single	C	Y	Yes	#6-350	5 <sup>9</sup> / <sub>16</sub>	8 <sup>11</sup> / <sub>16</sub>	64 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>4</sub>
U5200-XL-75	Direct Burial	Single	D	Z	Yes	#6-350	5 <sup>9</sup> / <sub>16</sub>	8 <sup>11</sup> / <sub>16</sub>	64 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>4</sub>
U5210-XL	Pad-mount	Single	—	—	Yes	#6-350	5 <sup>9</sup> / <sub>16</sub>	8 <sup>11</sup> / <sub>16</sub>	40 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>4</sub>
U5220-XL	Direct Burial	Double	—	—	Yes	#6-350	11 <sup>1</sup> / <sub>4</sub>	8 <sup>11</sup> / <sub>16</sub>	64 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>4</sub>
U5220-XL-41	Direct Burial	Double	B	X	Yes	#6-350	11 <sup>1</sup> / <sub>4</sub>	8 <sup>11</sup> / <sub>16</sub>	64 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>4</sub>
U5220-XL-75	Direct Burial	Double	D	Z	Yes	#6-350	11 <sup>1</sup> / <sub>4</sub>	8 <sup>11</sup> / <sub>16</sub>	64 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>4</sub>
U5230-XL	Pad-mount	Double	—	—	Yes	#6-350	11 <sup>1</sup> / <sub>4</sub>	8 <sup>11</sup> / <sub>16</sub>	40 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>4</sub>

### Receptacle Configurations

A	B	C	D
(2) TT30R, (1) 5-20R GFI	(1) TT30R, (1) 5-20R GFI	(1) 14-50R, (1) 5-20R GFI	(1) 14-50R, (1) TT30R, (1) 5-20R GFI

### Circuit Breaker Configurations

W	X	Y	Z
(2) 30A, 1P, 120V (1) 20A, 1P, 120V	(1) 30A, 1P, 120V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 30A, 1P, 120V (1) 20A, 1P, 120V

### Notes

- 20 Amps GFI receptacles are weather resistant and tamper resistant.
- 20 Amps GFI required at each RV site by UL and NEC 551-71.
- LED or fluorescent site light kits available. Factory or field-installable. See accessories page.
- Contact factory for additional configurations not shown here.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




# 1 □ Millennium Series Power Outlet Pedestals

125 Amps | Metered | 120/240V



U5300-O-75

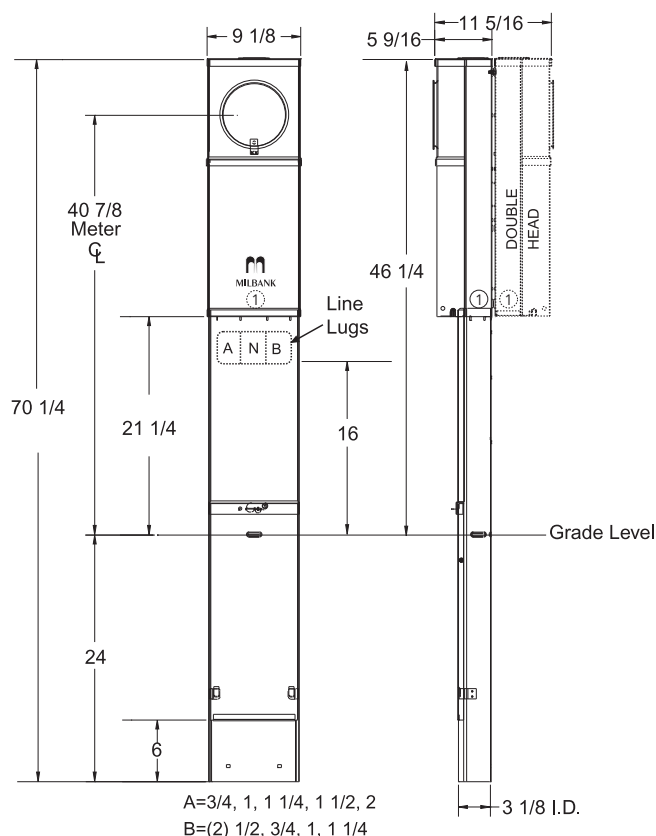

## Specifications

- UL-listed 125 Amps, 120/240 VAC—1Ø power outlet.
- Short circuit current withstand rating 10,000 RMS symmetrical amperes.
- NEMA 3R welded enclosure for durable outdoor use.
- Enclosure constructed with galvanized 16-gauge steel.
- Direct burial or pad-mounted post constructed with 16-gauge galvanized steel. Two removable front covers for ease of installation. Accepts up to three 2 1/2" conduits.
- ANSI 61 gray polyester powder coat finish.
- Wire terminations accept copper or aluminum conductors for loop feed wiring. Line: (2) #6-350 kcmil per phase, Ground: (2) #14-2/0, Neutral: (2) #6-350
- Six circuit plated copper interior accepts standard plug-in type circuit breakers. Rated up to 125 Amps.
- Three position self-grounded receptacle bridge accepts most standard NEMA receptacles with mounting plates.
- Four terminals, drawn ring type meter socket with aluminum sealing ring.
- Components factory wired with stranded copper wire.
- Lockable hinge cover and deadfront are removable for installation and maintenance. Stay-open hinge cover has safety interlock on deadfront. Deadfront must be removed before hinge cover can be removed.
- LED or fluorescent site light kits available. Factory or field installable. See accessories page.
- Unit weight — single: 53 lbs., double: 80 lbs.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




# Millennium Series Power Outlet Pedestals 1 1

## 125 Amps | Metered | 120/240V




### 125 Amps | Metered Power Outlet Pedestals

Catalog Number	Mounting Type	Powerheads	Receptacle Configuration	Circuit Breaker Configuration	Loop Feed	Connectors (Line)	Dimensions			Knockouts
							D"	W"	H"	
U5300-O	Direct Burial	Single	—	—	Yes	#6-350	5 <sup>5</sup> / <sub>16</sub>	8 <sup>11</sup> / <sub>16</sub>	70 <sup>1</sup> / <sub>4</sub>	1 <sup>1</sup> / <sub>4</sub>
U5300-O-41	Direct Burial	Single	A	X	Yes	#6-350	5 <sup>5</sup> / <sub>16</sub>	8 <sup>11</sup> / <sub>16</sub>	70 <sup>1</sup> / <sub>4</sub>	1 <sup>1</sup> / <sub>4</sub>
U5300-O-55	Direct Burial	Single	B	Y	Yes	#6-350	5 <sup>5</sup> / <sub>16</sub>	8 <sup>11</sup> / <sub>16</sub>	70 <sup>1</sup> / <sub>4</sub>	1 <sup>1</sup> / <sub>4</sub>
U5300-O-75	Direct Burial	Single	C	Z	Yes	#6-350	5 <sup>5</sup> / <sub>16</sub>	8 <sup>11</sup> / <sub>16</sub>	70 <sup>1</sup> / <sub>4</sub>	1 <sup>1</sup> / <sub>4</sub>
U5310-O	Pad-mount	Single	—	—	Yes	#6-350	5 <sup>5</sup> / <sub>16</sub>	8 <sup>11</sup> / <sub>16</sub>	46 <sup>1</sup> / <sub>4</sub>	1 <sup>1</sup> / <sub>4</sub>
U5320-O	Direct Burial	Double	—	—	Yes	#6-350	11 <sup>3</sup> / <sub>16</sub>	8 <sup>11</sup> / <sub>16</sub>	70 <sup>1</sup> / <sub>4</sub>	1 <sup>1</sup> / <sub>4</sub>
U5320-O-75	Direct Burial	Double	C	Z	Yes	#6-350	11 <sup>3</sup> / <sub>16</sub>	8 <sup>11</sup> / <sub>16</sub>	70 <sup>1</sup> / <sub>4</sub>	1 <sup>1</sup> / <sub>4</sub>
U5330-O	Pad-mount	Double	—	—	Yes	#6-350	11 <sup>3</sup> / <sub>16</sub>	8 <sup>11</sup> / <sub>16</sub>	46 <sup>1</sup> / <sub>4</sub>	1 <sup>1</sup> / <sub>4</sub>

### Receptacle Configurations

A	B	C
		
(1) TT30R, (1) 5-20R GFI	(1) 14-50R, (1) 5-20R GFI	(1) 14-50R, (1) TT30R, (1) 5-20R GFI

### Circuit Breaker Configurations

X	Y	Z
		
(1) 30A, 1P, 120V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 30A, 1P, 120V (1) 20A, 1P, 120V


### Notes


- 20 Amps GFI receptacles are weather resistant and tamper resistant.
- 20 Amps GFI required at each RV site by UL and NEC 551-71.
- LED or fluorescent site light kits available. Factory or field-installable. See accessories page.
- Contact factory for additional configurations not shown here.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




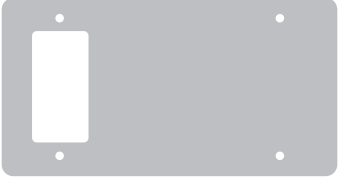

# Millennium Series

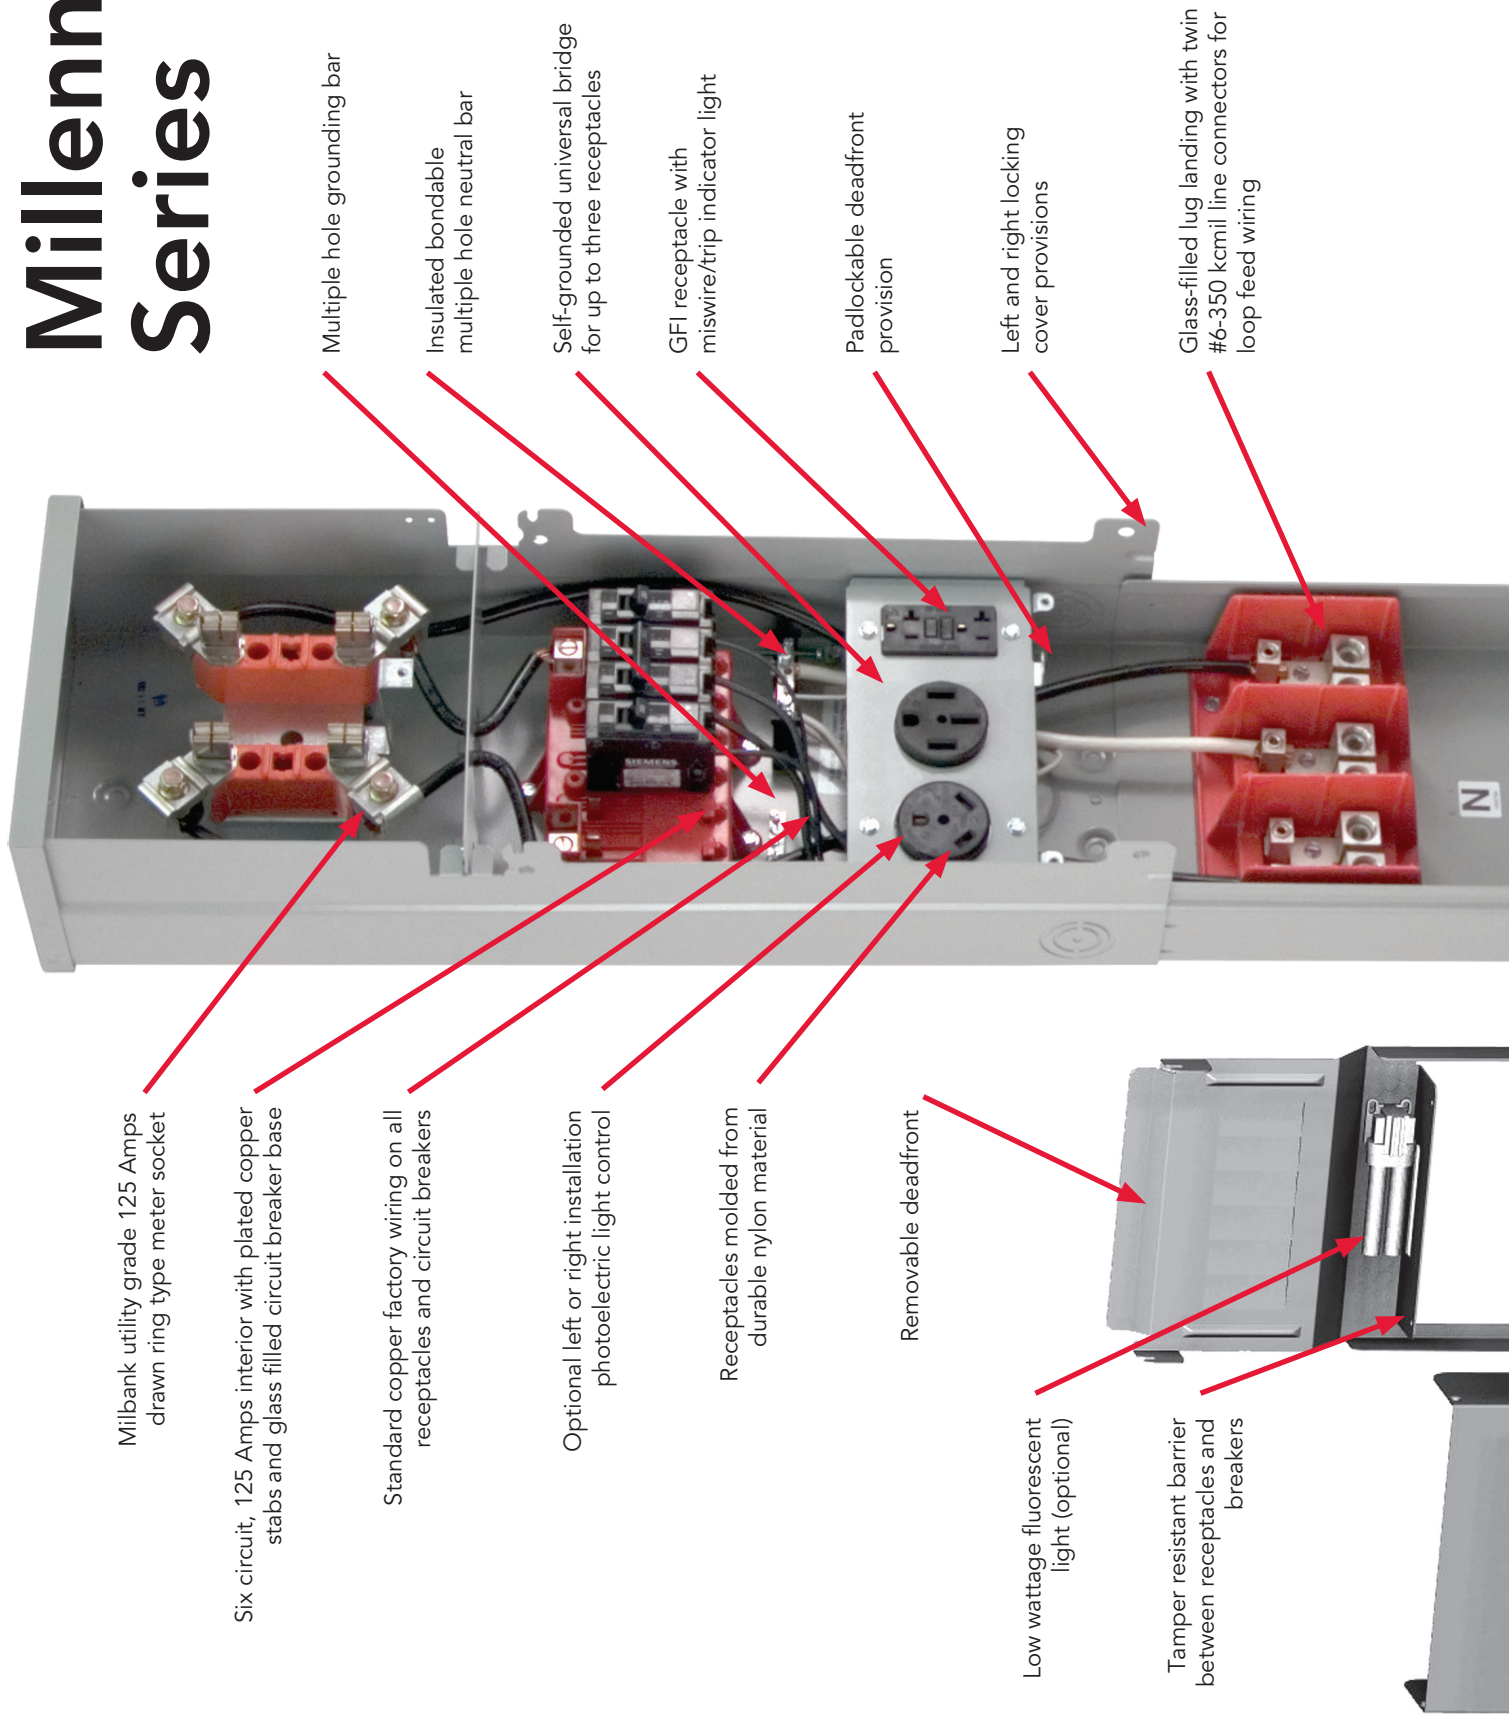


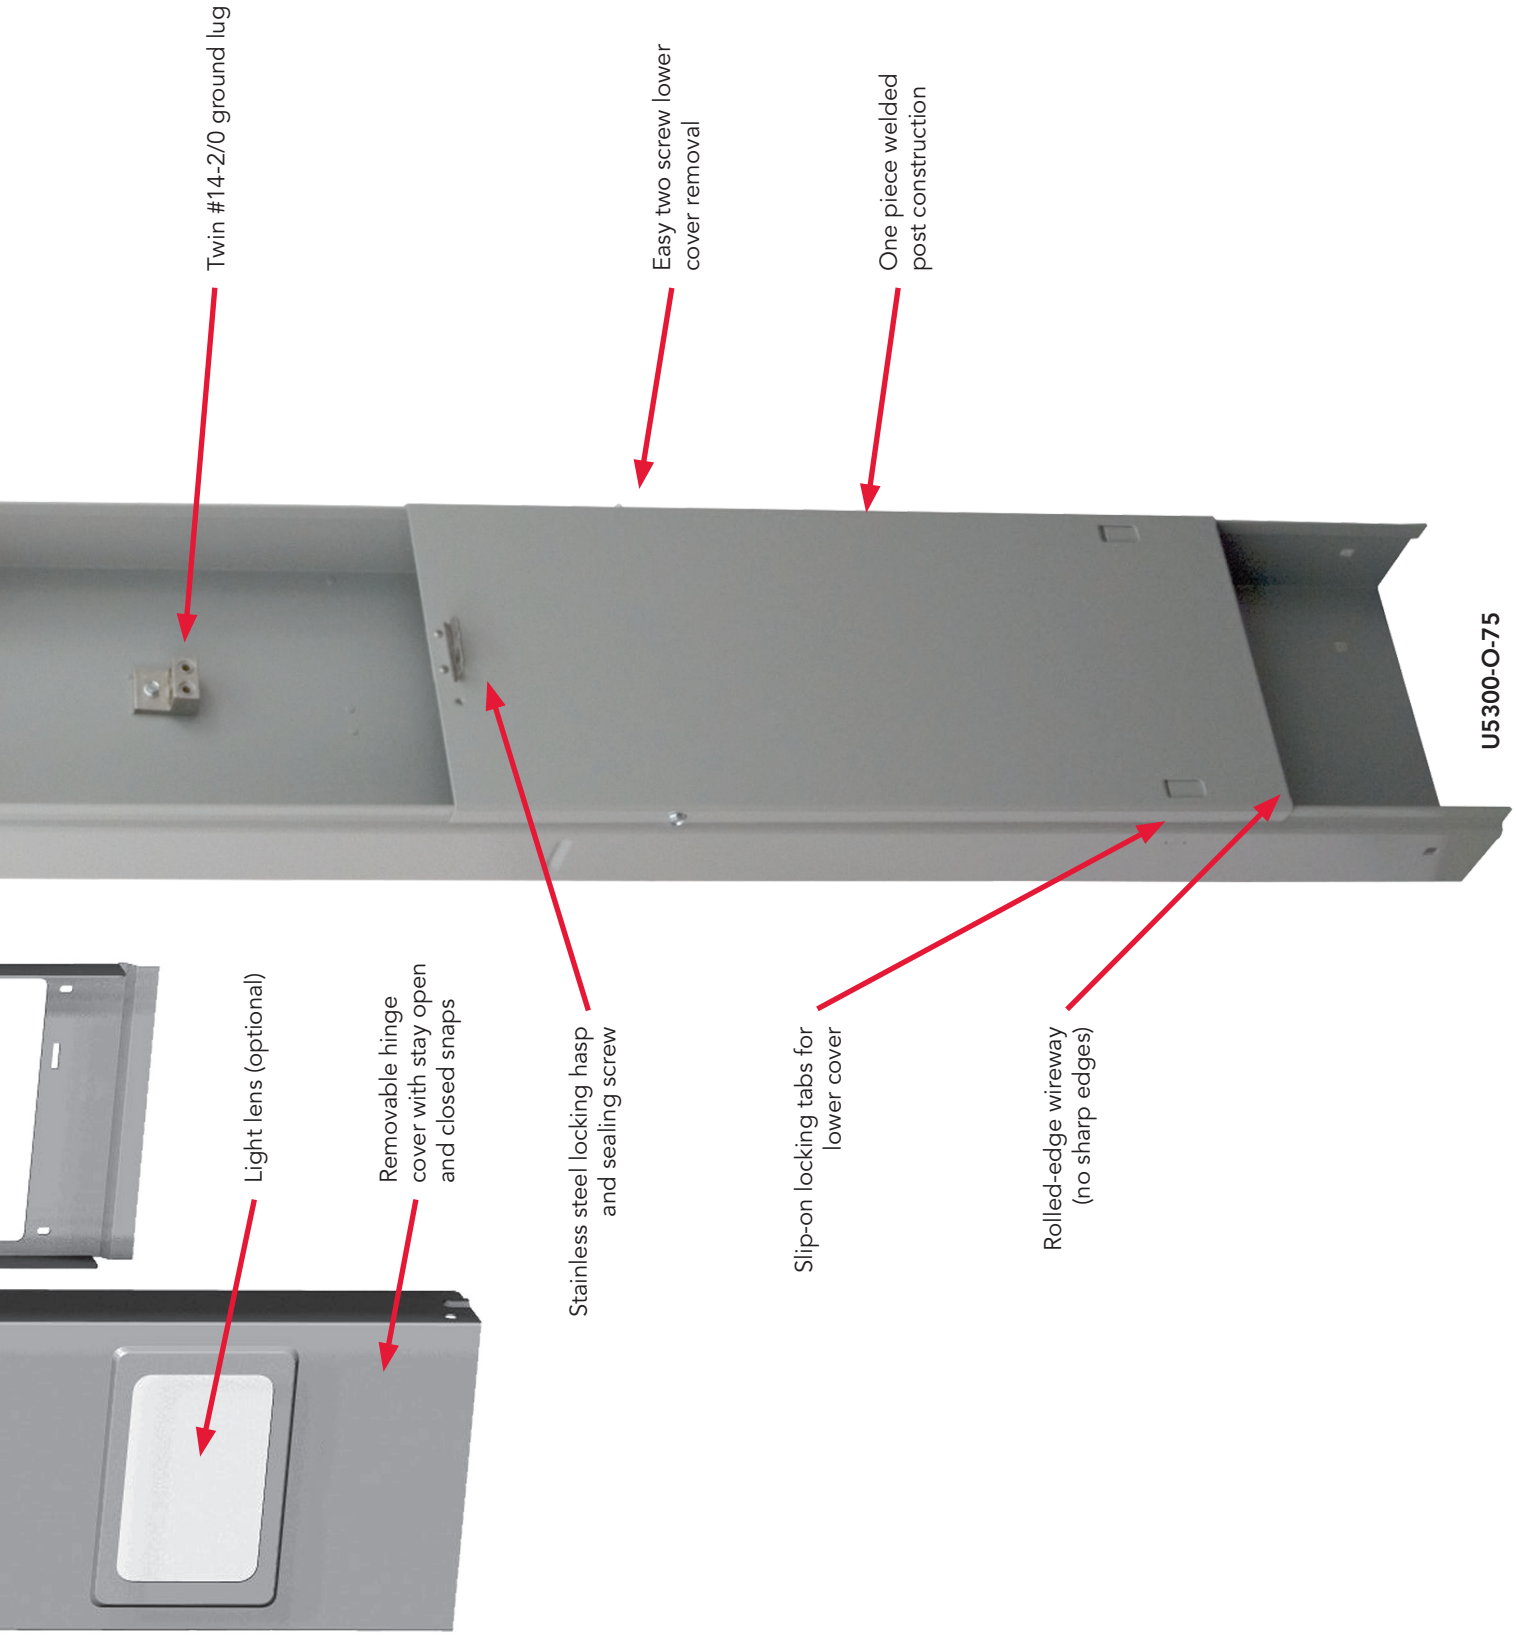






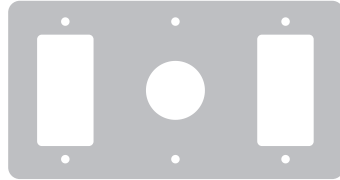
# Replacement Receptacle Plates

*For Millennium Series RV Products*

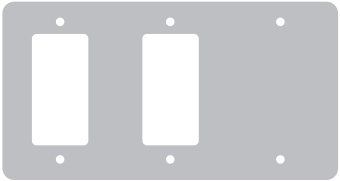		
K5920-75	K5920-10GR	K5920-54

		
K5920-11GR	K5920-522	K5920-41

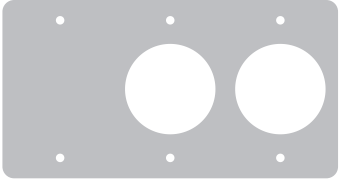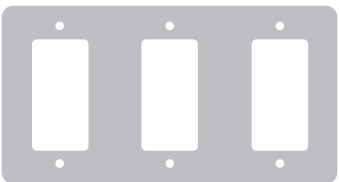		
K5920-58	K5920-111GR	K5920-BLANK


K5920-38

## Notes

- For application details, consult factory.




Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

# Lighting Accessories


## For Millennium Series RV Products

15


### Internal Light Kits for Unmetered Power Outlets (U5000 and U5200)

<b>Application</b>	Internal light kit for unmetered power outlets	
<b>Features</b>	Includes 5-watt fluorescent or LED lamps, socket, lamp shield and opaque hinge cover lens. Factory wired to 20 Amps GFI circuit. May be wired to separate 20 Amps circuit breaker. Order <b>Q120</b> separately.  Cover on unmetered power outlet is 19 $\frac{1}{8}$ " in height.	
<b>Ordering</b>	Order with <b>-L</b> suffix (after catalog number) for factory-installed fluorescent and <b>-LD</b> for factory-installed LED. Order catalog number <b>K5411</b> for field-installable 5-watt fluorescent lamps. Order catalog number <b>K6212</b> for field-installable LED lamps.	

### Internal Light Kits for Metered Power Outlets (U5100 and U5300)

<b>Application</b>	Internal light kit for metered power outlets	
<b>Features</b>	Includes 5-watt fluorescent or LED lamps, socket, lamp shield and opaque hinge cover lens. Factory wired to 20 Amps GFI circuit. May be wired to separate 20 Amps circuit breaker. Order <b>Q120</b> separately.  Cover on unmetered power outlet is 15 $\frac{1}{4}$ " in height.	
<b>Ordering</b>	Order with <b>-L</b> suffix (after catalog number) for factory-installed fluorescent and <b>-LD</b> for factory-installed LED. Order catalog number <b>K5412</b> for field-installable 5-watt fluorescent lamps. Order catalog number <b>K6213</b> for field-installable LED lamps.	

### Photoelectric Light Control Kit

<b>Application</b>	Photoelectric light control kit for <b>K5411, K5412, K6212, K6213</b> light kits.	
<b>Features</b>	2.5 Amps, 120 VAC photo electrical control wired in series with <b>K5411, K5412, K6212, K6213</b> light kits.	
<b>Ordering</b>	Order with <b>-LPC</b> suffix for factory-installed fluorescent light and PE control. Order with <b>-LDP</b> suffix for factor installed LED light and PE control Order catalog number <b>K5413</b> for field-installed.	

#### WARNING!

Always disconnect power prior to installing these devices.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




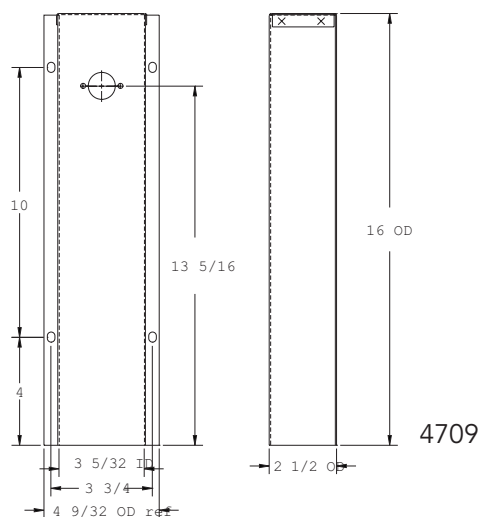


**Telephone and Cable TV Kit**

<b>Application</b>	Mounts to rear of pedestal series <b>U5200</b> and <b>U5300</b> . May also be adaptable to a wooden or similar structure.	
<b>Features</b>	<p>Single: 16" galvanized raceway, (1) RJ11 telephone jack and (1) Type F coaxial CATV jack. (K4709-02)</p> <p>Dual: 16" galvanized raceway, (2) RJ11 telephone jacks and (1) Type F coaxial CATV jack. (K4709-03)</p> <p>Includes mounting hardware and instructions.</p>	
<b>Ordering</b>	Single line telephone and cable TV kit order <b>K4709-02</b> .	
<b>Note</b>	Confirm acceptability with cable TV and telephone provider before ordering or installing these devices.	

**K4709-02-3R****K4709-02****Water Shroud with Hardware**

<b>Application</b>	Used to cover water pipe and provide means to mount hose bib to rear of pedestal.	
<b>Features</b>	<p>Includes mounting hardware and instructions.</p> <p>Matches <b>K4709</b> kits when mounted side by side.</p>	
<b>Ordering</b>	Order catalog number <b>K4709-WS</b> .	



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




# Pedestal Mounting Accessories


17

*For Millennium Series RV Products*


## Field-installed Pad-mount Kit
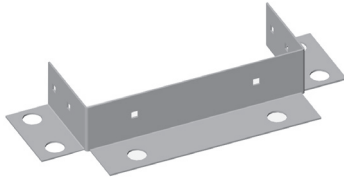
<b>Application</b>	Field-installable pad-mount kit with (6) ¾" mounting holes.	
<b>Features</b>	Includes ¼-20 stainless steel hardware to attach pad-mount base to post.  Anchor bolt kit sold separately (order catalog number <b>K5421</b> ).	
<b>Ordering</b>	Order catalog number <b>K5410</b> .	

## Stabilizer Foot with Hardware
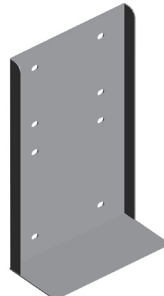
<b>Application</b>	Stabilizes direct burial type posts in unstable soil conditions.	
<b>Features</b>	Includes ¼-20 hardware to attach to <b>U5200</b> and <b>U5300</b> pedestals.	
<b>Ordering</b>	Order catalog number <b>K5415</b> .	

## Anchor Bolt Kit
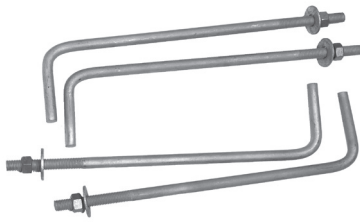
<b>Application</b>	Concrete anchor bolt kit designed to attach pad-mount base to concrete.	
<b>Features</b>	(4) sets of zinc-plated ⅝-11 x 10" bolt with 2" toe.  Includes nut and flat washer.	
<b>Ordering</b>	Order catalog number <b>K5421</b> .	


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.







## Field-installable Meter Kits

<b>Application</b>	Field-installable meter kit for <b>U5000</b> and <b>U5200</b> power outlets.	
<b>Features</b>	<ul style="list-style-type: none"> <li>100 Amps cast meter socket, CL200 E-Z Read Meter, sealing ring, security seal, 1" Milbank hub, nipple and mounting screws.</li> <li>See <b>CL200</b> for watt-hour meter specification.</li> </ul>	
<b>Ordering</b>	Order catalog number <b>K4800-D</b> for digital meters.	

## E-Z Read Watt-Hour Meters

<b>Application</b>	200 Amps E-Z read watt-hour meter designed to be field-installed on the <b>U5100</b> and <b>U5300</b> metered power outlets.	
<b>Features</b>	<ul style="list-style-type: none"> <li>200 Amps form 2S 120/240 VAC.</li> <li>Numeric readout in full kilowatt increments. No "tenths" dial.</li> <li>Remanufactured to 1% accuracy.</li> </ul>	
<b>Ordering</b>	Order catalog number <b>CL200-D</b> for digital meters.	

## Single Receptacle Only Power Outlet

Application	Overhead/underground power outlet receptacle, suitable for RV, temporary service, and campground equipment.			
Features	<ul style="list-style-type: none"><li>• NEMA 3R, 120/240 VAC single phase.</li><li>• Lockable cover.</li><li>• Breaker not included (in receptacle box).</li></ul>			
Ordering	Order catalog number from chart below.			
Receptacle Options	 <b>P-10GWR</b> 20A 5-20GR 120V GFI	 <b>P-13</b> 30A TT-30R 120V	 <b>P-54</b> 50A 14-50R 120/240V	

### WARNING!

Always disconnect power prior to installing these devices.




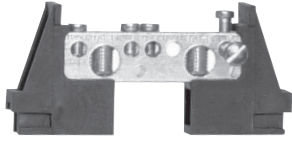






Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




# Replacement Parts and Accessories




19

For Millennium Series RV Products

			
<b>Z918449-AC</b> (19" unmetered) <b>Z918447-AC</b> (15" metered) Hinge cover	<b>Z818052-SC</b> (19" unmetered) <b>Z818480-SC</b> (15" metered) Deadfront	<b>MR-2</b> Snap action sealing ring	Neutral assembly shown with 2 insulator supports ( <b>706230-MO</b> ), a ground connector ( <b>Z705790-AC</b> ) and bonding screw ( <b>Z707365-SC</b> )

			
<b>Q120</b> 20 Amps, One-pole circuit breaker	<b>708784-MO</b> 20 Amps, One-pole GFI circuit breaker	<b>Q130</b> 30 Amps, One-pole circuit breaker	<b>Q250</b> 50 Amps, Two-pole circuit breaker

		
<b>Z918466-AC</b> Lug landing base	<b>Z917602-AC</b> Circuit breaker base (6-circuit)	<b>Z915141-AC</b> Left or right meter block assembly

		
<b>Z708080-MO</b> 20 Amps GFI receptacle NEMA 5-20GR	<b>Z701776-MO</b> 30 Amps receptacle NEMA TT-30	<b>Z708767-MO</b> 50 Amps receptacle NEMA 14-50R


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.





# Voyager Series Pedestal Power Outlet

100 Amps | 120/240V

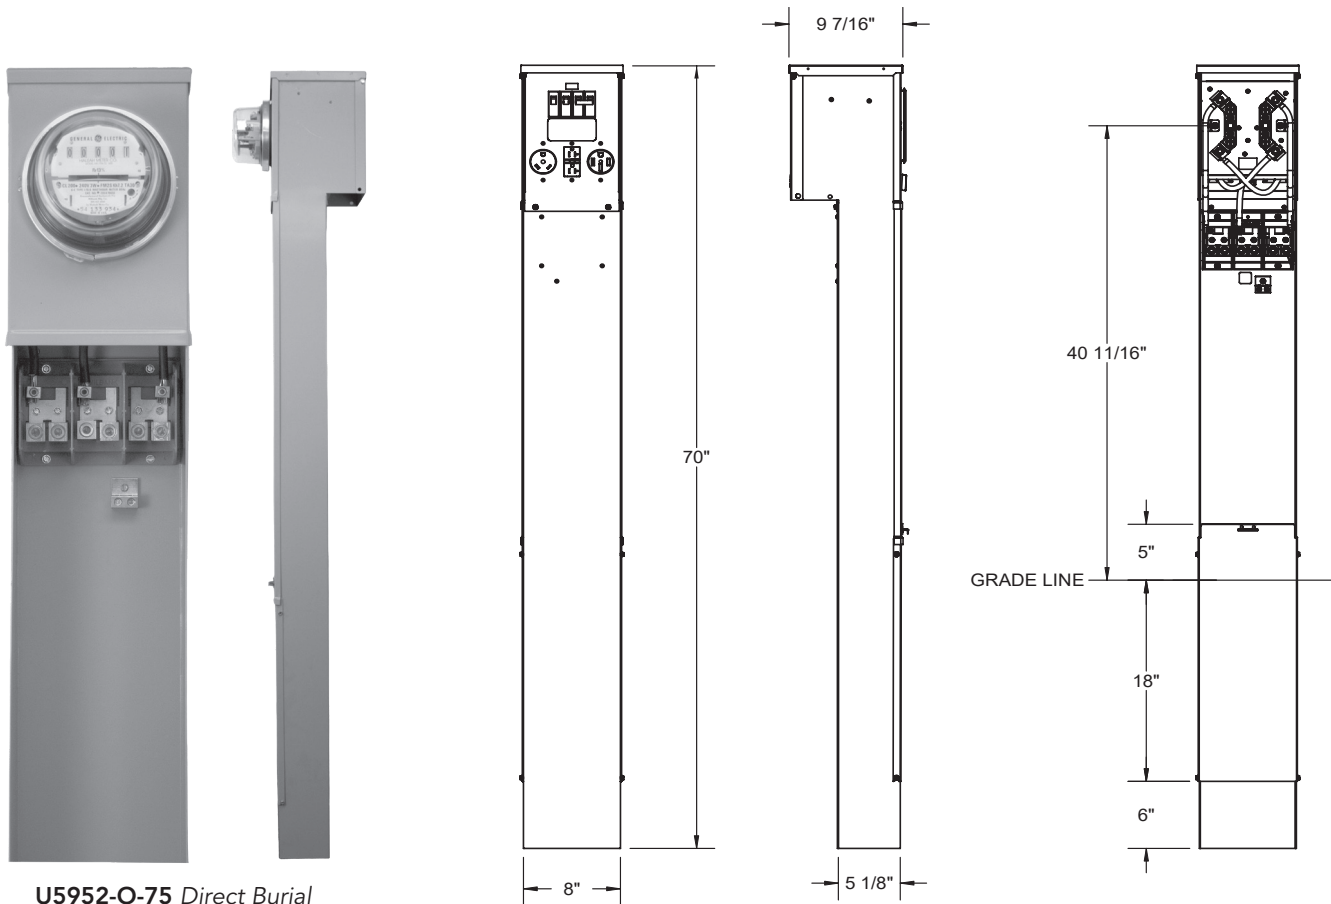

U5952-O-75 Direct Burial

## Specifications

- UL-listed 100 Amps, 120/240 VAC—1Ø power outlet.
- Ring type version only.
- Metered and unmetered versions available.
- Short circuit current withstand rating 10,000 RMS symmetrical amperes.
- NEMA 3R welded enclosure for durable outdoor use.
- Direct burial or pad-mounted post constructed with 14-gauge galvanized steel. Removable covers for ease of installation.
- ANSI 61 gray polyester powder coat finish.
- Wire terminations accept copper or aluminum conductors for loop feed wiring.  
Line: (4) #6-350 kcmil      Ground: (2) #14-2/0      Neutral: (2) #6-350 kcmil
- Four circuit plated copper interior accepts standard plug-in type circuit breakers. Rated up to 100 Amps.
- Components factory wired with stranded aluminum wire.
- Lockable hinge cover and deadfront are removable for installation and maintenance.
- Unit weights: direct burial, metered (55 lbs.); direct burial, unmetered (37 lbs.); pad-mount, metered (44 lbs.); pad-mount, unmetered (26 lbs.).



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

# Voyager Series Pedestal Power Outlet





# 21

100 Amps | 120/240V





## 100 Amps | Voyager Series Pedestal Power Outlets

Catalog Number	Metered/ Unmetered	Mounting Method	Receptacle Configuration	Circuit Breaker Configuration	Loop Feed	Connectors (Line)	Dimensions		
							D"	W"	H"
U5950-O-41	Unmetered	Direct Burial	A	W	Yes	#6-350	3¼	8	60
U5950-O-55	Unmetered	Direct Burial	B	X	Yes	#6-350	3¼	8	60
U5950-O-332	Unmetered	Direct Burial	C	Y	Yes	#6-350	3¼	8	60
U5950-O-75	Unmetered	Direct Burial	D	Z	Yes	#6-350	3¼	8	60
U5951-O-41	Unmetered	Pad-mount	A	W	Yes	#6-350	3¼	8	36
U5951-O-55	Unmetered	Pad-mount	B	X	Yes	#6-350	3¼	8	36
U5951-O-332	Unmetered	Pad-mount	C	Y	Yes	#6-350	3¼	8	36
U5951-O-75	Unmetered	Pad-mount	D	Z	Yes	#6-350	3¼	8	36
U5952-O-41	Metered	Direct Burial	A	W	Yes	#6-350	5⅞	8	70
U5952-O-55	Metered	Direct Burial	B	X	Yes	#6-350	5⅞	8	70
U5952-O-332	Metered	Direct Burial	C	Y	Yes	#6-350	5⅞	8	70
U5952-O-75	Metered	Direct Burial	D	Z	Yes	#6-350	5⅞	8	70
U5953-O-41	Metered	Pad-mount	A	W	Yes	#6-350	5⅞	8	46
U5953-O-55	Metered	Pad-mount	B	X	Yes	#6-350	5⅞	8	46
U5953-O-332	Metered	Pad-mount	C	Y	Yes	#6-350	5⅞	8	46
U5953-O-75	Metered	Pad-mount	D	Z	Yes	#6-350	5⅞	8	46

## Receptacle Configurations



A	B	C	D
			
(1) TT30R, (1) 5-20R GFI	(1) 14-50R, (1) 5-20R GFI	(2) TT30R, (1) 5-20R GFI	(1) 14-50R, (1) TT30R, (1) 5-20R GFI



## Circuit Breaker Configurations




W	X	Y	Z
			
(1) 30A, 1P, 120V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 30A, 1P, 120V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 30A, 1P, 120V (1) 20A, 1P, 120V




Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

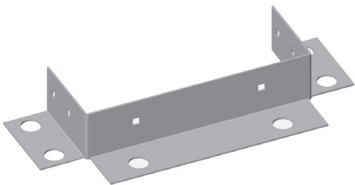

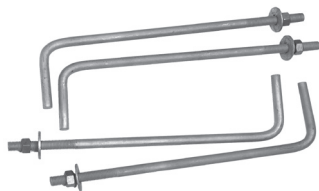	
<b>K5959</b> <i>Field-installable pad-mount kit</i>	<b>K5415</b> <i>Stabilizer foot with hardware</i>

	
<b>K5421</b> <i>Anchor bolt kit</i>	<b>CL200-D</b> <i>Digital E-Z read watt-hour meter</i>



		
<b>Z708080-MO</b> <i>20 Amps GFI receptacle NEMA 520</i>	<b>Z701776-MO</b> <i>30 Amps receptacle NEMA TT30</i>	<b>Z708767-MO</b> <i>50 Amps receptacle NEMA 1450</i>



		
<b>Q120</b> <i>20 Amps, One-pole circuit breaker</i>	<b>Q130</b> <i>30 Amps, One-pole circuit breaker</i>	<b>Q250</b> <i>50 Amps, Two-pole circuit breaker</i>



# Voyager Series Pedestal Power Outlet




23

## Accessories and Replacement Parts

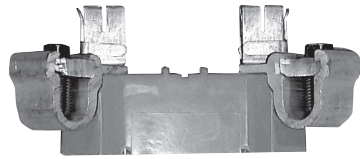	
<b>Z1050761</b> <i>Circuit breaker base</i>	<b>Z915141-AC</b> <i>Left or right meter block assembly</i>

	
<b>Z1144586</b> <i>Hinge cover</i>	<b>Z1144587</b> (-75, shown) <b>Z1144921</b> (-41) <b>Z1144946</b> (-55) <b>Z1144947</b> (-332) <i>Deadfront</i>

	
<b>Z1144588</b> <i>Circuit breaker bracket</i>	<b>MR-2</b> <i>Snap action sealing ring</i>

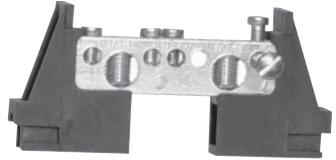		
<i>Neutral assembly shown with 2 insulator supports (706230-MO) and 1 ground connector (Z705790-AC) for metered version</i>	<b>Z1002769</b> <i>Ground assembly for unmetered version</i>	<b>Z1144618</b> (unmetered, shown) <b>Z1147928</b> (metered) <i>Lug landing base</i>

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.







### Specifications

---

- Built in accordance with NEMA, ASA and AIEEE standards. Designed and tested to withstand 150% of rated load for two hours continuously.
- Integrated design of the enclosure, core and coil, and secondary distribution panel permits convenient vertical line and load terminations.
- Primary and/or secondary main circuit breaker protection available. Single fuse primary overcurrent protection provided on 2400 VAC and above units. Second primary line fuse available if required.
- Other primary voltages available: 4160, 4800, 7200, 7960, and 12,470. Consult factory.

### Core and Coil

---

- Aluminum wound (copper available)
- Standard voltage taps at 2 FCAN and 4 FCBN
- Rated at 150°C temperature rise

### Distribution Bus

---

- 1600 Amps tin-plated aluminum
- Space available for up to (12) circuit breakers (1600 Amps maximum)
- Uses Milbank type **UQFP-100** through 200 Amps circuit breakers

### Enclosure

---

- NEMA 3R enclosure
- Powder coated galvanized steel (aluminum available)
- Lockable primary and secondary doors
- Fork lift slots provided







Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



# Dry Type Transformers

25

*With Distribution for RV and Mobile Home Park Applications*

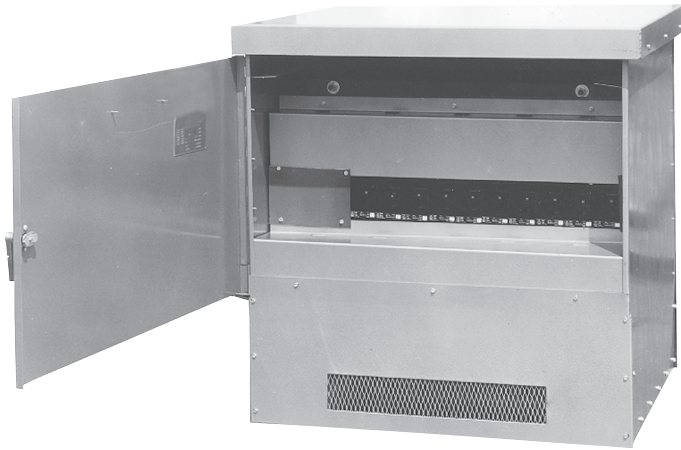

## Dry Type Transformers

Catalog Number	KVA	Volts to 120/240 1Ø	UL-listed	Weight (lbs.)	Dimensions		
					D"	W"	H"
7URMD	75	480	Yes	850	40	38	48
10URMD	100	480	Yes	1050	40	38	48
16URMD	167½	480	Yes	1400	40	38	48
20URMD	200	480	Yes	1650	40	38	48
25URMD	250	480	No	2200	40	38	48
7URMD24	75	2400	No	1050	53	41	48
10URMD24	100	2400	No	1200	53	41	48
16URMD24	167½	2400	No	1650	53	41	48
20URMD24	200	2400	No	1900	53	41	48
25URMD24	250	2400	No	2200	53	41	48

## Notes

- For a replacement bus kit, order **K5425**.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.





### Specifications

- 600 to 1200 Amps, 120/240 VAC, 1Ø distribution bus accepts up to six Two-pole, 200 Amps circuit breakers. Order from chart below.
- Economical alternative to costly wall hung or strut-mounted panelboards and load centers.
- Low profile, aesthetic design can be located near utility transformers or fed from a main service to a convenient location.
- Pad-mounted NEMA 3R powder coated aluminum enclosure—standard color is gray.
- Hinge door and lift off rear service door are lockable and sealable for security.
- **Note:** Consult local code enforcement for pad size requirements. Order **CP-24-PDMNT-CALT** pad-mount base or CP-ABK5/8 anchor bolt kit separately.

### Pad-Mounted Panelboards

Catalog Number	Amps	Phase	Volts	Connectors (Line)	Dimensions		
					D"	W"	H"
CP3B-AUX-1200	1200	1Ø	Yes	(3) 1-600 per phase or (3) 2-250 per phase	17	24	41



UQFP

### Plug-In Circuit Breakers | 200 Amps Frame | 10K AIC | Two-pole Common Trip


Catalog Number	Two-pole Rating	Package Quantity	Wire Range	
			CU	AL
UQFP-100	100	1	#3-#1	#1-1/0
UQFP-125	125	1	#3-#1	#1-1/0
UQFP-150	150	1	1/0-300 kcmil	2/0-300 kcmil
UQFP-175	175	1	1/0-300 kcmil	2/0-300 kcmil
UQFP-200	200	1	1/0-300 kcmil	2/0-300 kcmil





Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

# Terminal Boxes

100–400 Amps | 120/240V

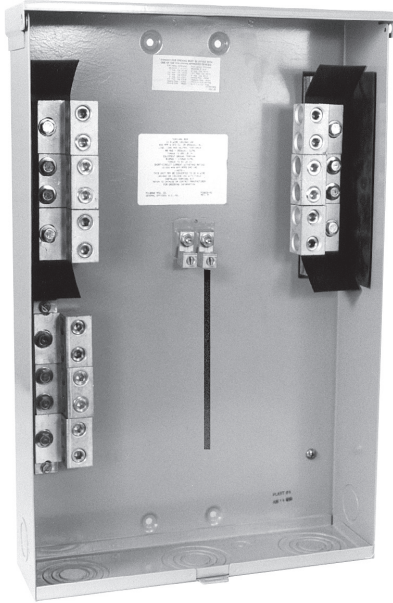

U4540-XL

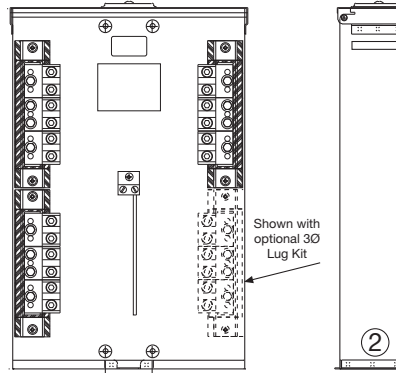

## Terminals Boxes | 120/240V

Catalog Number	Amps	Phase	Volts	Hub	Connectors CU/AL	1Ø to 3Ø Kit	Dimensions			Knockouts			
							D"	W"	H"	1	2	3	4
U4544-XL	100	1	120/240	C.P.	(6) #12-1/0	K4543	4 <sup>1</sup> / <sub>8</sub>	9 <sup>13</sup> / <sub>16</sub>	18	2	1	1/4, 1/2	—
U4546-XL	100	3	600	C.P.	(6) #12-1/0	N/A	4 <sup>1</sup> / <sub>8</sub>	9 <sup>13</sup> / <sub>16</sub>	18	2	1	1/4, 1/2	—
U4540-XL	200	1	120/240	C.P.	(6) #6-350	K4539	4 <sup>1</sup> / <sub>8</sub>	14 <sup>13</sup> / <sub>16</sub>	23	2 1/2	2 1/2	1 1/4	1/4, 1/2
U4542-XL	200	3	600	C.P.	(6) #6-350	N/A	4 <sup>1</sup> / <sub>8</sub>	14 <sup>13</sup> / <sub>16</sub>	23	2 1/2	2 1/2	1 1/4	1/4, 1/2
U4548-RXL	400	1	120/240	C.P.	(3) #6-350 or (2) #4-600	K4547	5	15 1/2	27	3	3	1/4, 1/2	1/4
U4549-RXL	400	3	600	C.P.	(3) #6-350 or (2) #4-600	N/A	5	15 1/2	27	3	3	1/4, 1/2	1/4

## Notes

- **Hub:** Standard hub opening on top with closing plate attached.
- **Features:** UL-listed padlockable NEMA 3R enclosure.
- **3Ø 120/240V Application:** Field-installable 3Ø lug kit converts 1Ø unit to 3Ø unit.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



### Important Note

In addition to national and local electrical codes, many utilities have specific requirements for metering equipment. Always consult the serving utility for their specifications and requirements prior to ordering or installing Milbank meter mounting equipment.

### Before Energizing

- A. Give equipment a thorough visual examination to determine that:
  - 1) No shipping or installation damage exists.
  - 2) Proper clearances have been maintained.
  - 3) All connections have been made.
  - 4) Equipment is clean and dry.
- B. Make a thorough examination to:
  - 1) Verify tightness of all bolted connections (see table below).
  - 2) Manually operate all circuit breakers, switches, relays, etc.
  - 3) Check rigidity of all mountings, bus bars and components.
  - 4) Use test equipment to check continuity of circuitry and integrity of insulation.
- C. All switches and circuit breakers should be in the "off" position.
- D. Verify that manual meter bypass (if applicable) is in non-bypass position.
- E. Install cover and/or close doors.
- F. If installation is not being energized at this time, follow "after-energizing" steps listed below. These steps will secure the installation in case of accidental energization.

### When Energizing

- A. Use caution and follow established safety procedures:
  - 1) Wear safety apparel.
  - 2) Use safety equipment.
  - 3) Take action to prevent injury to yourself and others in the event of failure of the installation.
  - 4) Take action to prevent/decrease damage to property in the event of failure of the installation.
  - 5) If you are unsure how to safely energize the installation, get someone who is knowledgeable to do it.

### After Energizing

- A. Secure the installation:
  - 1) To prevent accidental contact with energized parts, cover all openings with approved filler devices.
  - 2) To prevent unauthorized access, secure all covers and/or doors with approved security devices.
  - 3) Attach/post information to advise others of potential hazards associated with the installation.

### Recommended Torque for General Applications\*

Nominal Size	Joint Description		Head Type	Torque (Inch Lbs.)
	Screw	Nut		
10	Brass	Brass Nut or Extruded Hole	All	20-25 inch lbs.
10	Steel	Copper or Aluminum Busbar $\leq 1/8"$	All	25-30 inch lbs.
10	Steel	Steel Nut or Extruded Hole; CU or AL Busbar $> 1/8"$	All	30-35 inch lbs.
12	Steel	Aluminum Extruded Hole	All	30-35 inch lbs.
12	Steel	Steel Nut or Extruded Hole	All	40-50 inch lbs.
1/4	Steel	Aluminum Extruded Hole	All	40-50 inch lbs.
1/4	Steel	Steel Nut or Extruded Hole; CU or AL Busbar	All	50-60 inch lbs.
5/16	Steel	Aluminum Extruded Hole	Hex	60-70 inch lbs.
5/16	Steel	Steel Nut or Extruded Hole; CU or AL Busbar	Hex	100-150 inch lbs.
3/8	Steel	Steel Nut	Hex	150-200 inch lbs.
1/2	Steel	Steel Nut	Hex	200-250 inch lbs.

\* Interior labels typically indicate the required torque for wire connectors and studs, and should be referenced first.  
**CU:** Copper  
**AL:** Aluminum



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

7URMD .....	25	U4549-RXL .....	27	UQFP-125 .....	26
7URMD24 .....	25	U5000-XL .....	5	UQFP-150 .....	26
10URMD .....	25	U5000-XL-41 .....	5	UQFP-175 .....	26
10URMD24 .....	25	U5000-XL-55 .....	5	UQFP-200 .....	26
16URMD .....	25	U5000-XL-75 .....	5		
16URMD24 .....	25	U5000-XL-332 .....	5	<b>Z</b>	
20URMD .....	25	U5100-XL .....	7	Z701776-MO .....	19, 22
20URMD24 .....	25	U5100-XL-41 .....	7	Z705790-AC .....	19, 23
25URMD .....	25	U5100-XL-55 .....	7	Z707365-SC .....	19
25URMD24 .....	25	U5100-XL-75 .....	7	Z708080-MO .....	19, 22
706230-MO .....	19, 23	U5101-XL .....	7	Z708767-MO .....	19, 22
708784-MO .....	19	U5200-XL .....	9	Z818052-SC .....	19
		U5200-XL-41 .....	9	Z818480-SC .....	19
<b>C</b>		U5200-XL-55 .....	9	Z915141-AC .....	19, 23
CL200-D .....	22	U5200-XL-75 .....	9	Z917602-AC .....	19
CP3B-AUX-1200 .....	26	U5200-XL-332 .....	9	Z918447-AC .....	19
		U5210-XL .....	9	Z918449-AC .....	19
<b>K</b>		U5220-XL .....	9	Z918466-AC .....	19
K5415 .....	22	U5220-XL-41 .....	9	Z1002769 .....	23
K5421 .....	22	U5220-XL-75 .....	9	Z1050761 .....	23
K5920-10GR .....	14	U5230-XL .....	9	Z1144586 .....	23
K5920-11GR .....	14	U5300-O .....	11	Z1144587 .....	23
K5920-38 .....	14	U5300-O-41 .....	11	Z1144588 .....	23
K5920-41 .....	14	U5300-O-55 .....	11	Z1144618 .....	23
K5920-54 .....	14	U5300-O-75 .....	11	Z1144921 .....	23
K5920-58 .....	14	U5310-O .....	11	Z1144946 .....	23
K5920-75 .....	14	U5320-O .....	11	Z1144947 .....	23
K5920-111GR .....	14	U5320-O-75 .....	11	Z1147928 .....	23
K5920-522 .....	14	U5330-O .....	11		
K5920-BLANK .....	14	U5950-O-41 .....	21		
K5959 .....	22	U5950-O-55 .....	21		
		U5950-O-75 .....	21		
<b>M</b>		U5950-O-332 .....	21		
MR-2 .....	19, 23	U5951-O-41 .....	21		
		U5951-O-55 .....	21		
<b>Q</b>		U5951-O-75 .....	21		
Q120 .....	19, 22	U5951-O-332 .....	21		
Q130 .....	19, 22	U5952-O-41 .....	21		
Q250 .....	19, 22	U5952-O-55 .....	21		
		U5952-O-75 .....	21		
<b>U</b>		U5952-O-332 .....	21		
U4540-XL .....	27	U5953-O-41 .....	21		
U4542-XL .....	27	U5953-O-55 .....	21		
U4544-XL .....	27	U5953-O-75 .....	21		
U4546-XL .....	27	U5953-O-332 .....	21		
U4548-RXL .....	27	UQFP-100 .....	26		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



[illegible]

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



**MILBANK<sup>®</sup>**  
ENERGY AT WORK

Milbank Manufacturing | 4801 Deramus Ave., Kansas City, MO 64120 | 877.483.5314  
milbankworks.com | @milbankworks