


400A Meter Main

Single & Three Phase



U6227-X-400-K3L

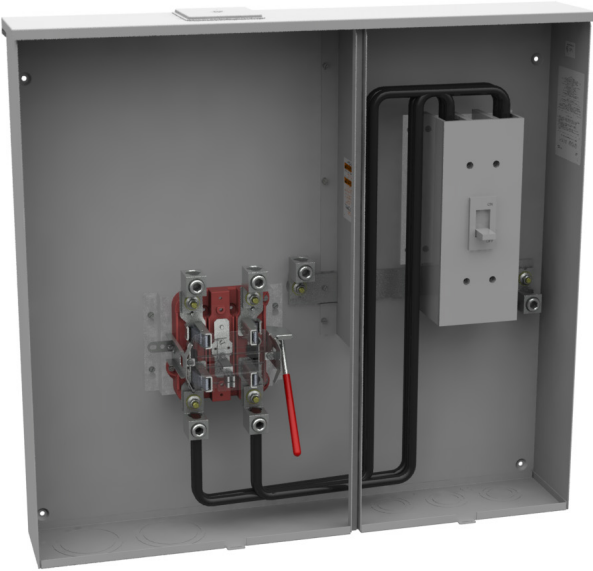

U6230-X-400-K7

Features

- **Safe & Secure**
 - Barrel lock provision (optional)
 - Easy outside access to main service disconnect in case of emergency
- **Easy Installation**
 - All-in-one enclosure reduces installation time, labor and errors
 - Wall hanging brackets included
 - Overhead/underground service entry
 - Accepts 3", 3 1/2" or 4" hub for overhead applications
 - Field-installed 5th terminal available (single-phase only; #K3865)
- **Durable Enclosure**
 - NEMA 3R rated
 - G90 galvanized steel, powder-coated paint protects against corrosion
- **Ideal for large homes, small office and commercial buildings**
- **Heavy duty lever bypass meter socket**
- **One 400A breaker (1Ø or 3Ø units available)**
- **UL Listed**
- **Made in the USA**

Common Applications



Large Homes



Small Office & Commercial Buildings

Installations must strictly comply with all applicable codes, industry standards, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or discontinue the product described at any time without notice or obligation. Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.



400A Meter Main

Single & Three Phase

400 Amp Meter Main | 4 & 5 Terminal | 1Ø3W | 240 VAC

Catalog Number	Terminals	Service	Hub	Connectors CU/AL	Dimensions			Knockouts			
				Line	D"	W"	H"	1	2	3	4
U6227-X-400-K3L	4	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼
U6227-X-400-K3L-5T6	5	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼
U6227-X-400-K3L-5T9	5	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼
U6228-X-400-K3L	4	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼
U6228-X-400-K3L-5T6	5	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼
U6228-X-400-K3L-5T9	5	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼

Specifications

- Side Buss Units: U6228
- AIC Rating : **22K AIC at 240V**
- 300 Amp breaker: Can be installed from the factory (upon request)

400 Amp Meter Main | 7 Terminal | 3Ø4W | 480 VAC

Catalog Number	Service	Hub	Connectors CU/AL	Dimensions			Knockouts			
			Line	D"	W"	H"	1	2	3	4
U6229-X-400-K7L	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼
U6230-X-400-K7L	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼

400 Amp Meter Main with Breakers | 3Ø4W | Ringless | 480 VAC

Catalog Number	Service	Hub	Connectors CU/AL	Dimensions			Knockouts			
			Line	D"	W"	H"	1	2	3	4
U6115-X-2/200-K7L	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	7	37¼	34	½, ¾	½, ¾	½, ¾	½, ¾

Specifications

- Side Buss Units: U6230
- AIC Rating: **22K AIC at 240V**. And 10K AIC at 480V
- 300 Amp breaker: Can be installed from the factory (upon request)
- U6115-X-2/200-K7L comes with (2) 200A 3Ø breakers

Installations must strictly comply with all applicable codes, industry standards, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or discontinue the product described at any time without notice or obligation. Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.

