

MILBANK[®]
ENERGY AT WORK



Arkansas, W. Tennessee, N. Mississippi

Meter Mounting Equipment



Milbank Overview

Energy At Work since 1927

Milbank designs and manufactures electrical solutions that move and manage power for the residential, commercial, industrial, utility and transportation sectors. With 90 years of expertise in electrical engineering design and manufacturing, Milbank's portfolio includes metering equipment, enclosures and enclosed controls. Founded in 1927, Milbank is a family-owned, American manufacturer headquartered in Kansas City, Mo. For more information, please visit milbankworks.com.

METERING



As a market leader in electrical metering equipment, Milbank has set the standard for quality since 1927. Hundreds of configurations are available, including many sizes, knockout configurations, terminal configurations, bypass options, hubs, locks and connectors. Milbank has the socket you need with thousands of active products to meet your utility's requirements.

ENCLOSURES



Milbank's line of enclosures include commercial junction boxes, panel mount enclosures, transformer cabinets, wireway, trough and industrial panel mount and push-button enclosures. Built with high-quality craftsmanship and materials which meet or exceed industry standards, Milbank enclosures are made to protect controls and equipment from dust, dirt and other harmful elements found in a wide variety of environments.

ENCLOSED CONTROLS



Milbank doesn't just build empty enclosures. We can deliver the entire package, complete with custom control equipment built to your exact specifications by our engineers. Milbank commercial pedestals are an attractive, secure, easy to install and cost-effective solution when underground remote site power distribution and control equipment is required, replacing unsightly and inefficient strut and backboard structures. Milbank's manual and automatic transfer switches are durable, easy to install and compatible with most generators.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Table of Contents

Air Conditioner Disconnects

30-60 amp AC disconnects	6
60 amp AC disconnect with 20 amp GFCI receptacle	7
Hot tub disconnects	8

Single Position Sockets

125 amp, 4 & 5 terminal	9
200 amp, 4 & 5 terminal	10
200 amp, 4 & 5 terminal, side wireway	11

Single Position with Lever Bypass

200 amp, 5 & 7 terminal	12
320 amp, 4 terminal	13
320 amp, 5 & 7 terminal	14

K Base Bolt-In Meter Socket

4 & 7 terminal	15
Lugs for K Base	16

Unmetered Power Outlet

100-200 amp.....	17
------------------	----

Meter Mains with Load Center

100-200 amp, 4 terminal	18
-------------------------------	----

Cold Sequence

200 amp, 7 terminal, heavy duty lever bypass, ringless	19
--	----

Multi-Position Sockets

100 amp, 4 & 5 terminal, ringless	20-22
100 amp, 4 terminal, vertical, ringless	23
150 amp, 4 terminal	24
200 amp, 4 terminal	25-27

Multi-Position Meter Mains

200 amp, 4 terminal, ringless.....	28
100-200 amp, 4 terminal, ringless, 22K	29-30

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Transformer Rated

20 amp, CT Rated socket	31
CT Cabinets	32

Pedestals

200 amp, 4 terminal, ringless.....	34-35
------------------------------------	-------

Miscellaneous

Circuit Breakers	36-37
Accessories	38-40
Utility Approval List	41-42
Commercial Pedestals.....	43-44
Reference Information	47-51
Index.....	52-53




Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Catalog Number Logic

How our product catalog numbers are derived

5


CATALOG
NUMBER
LOGIC

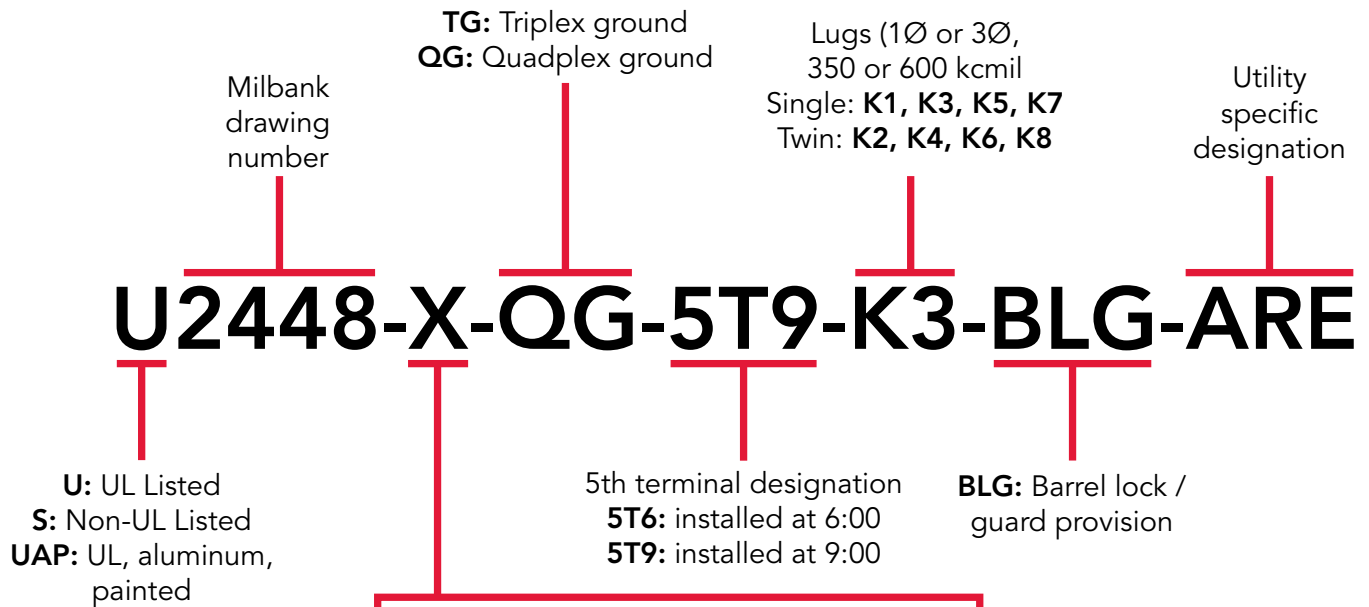

Hub Openings & Closing Plates

-O Blank top	-PXL Closing plate packed inside
-RL Small hub opening	-WL 1" hub
-R Large hub opening	-YL 1¼" hub
-XL Small closing plate	-ZL 1½" hub
-XT (2) Large Closing plates	-DL 2" hub
-XTL (2) Small closing plates	-EL 2½" hub
-X Large closing plate	-F 3" hub
-RXL Large hub opening adapted to small closing plate	-G 3½" hub
-RRL Large hub opening adapted to small hub opening	-H 4" hub

U: UL Listed
S: Non-UL Listed
UAP: UL, aluminum, painted

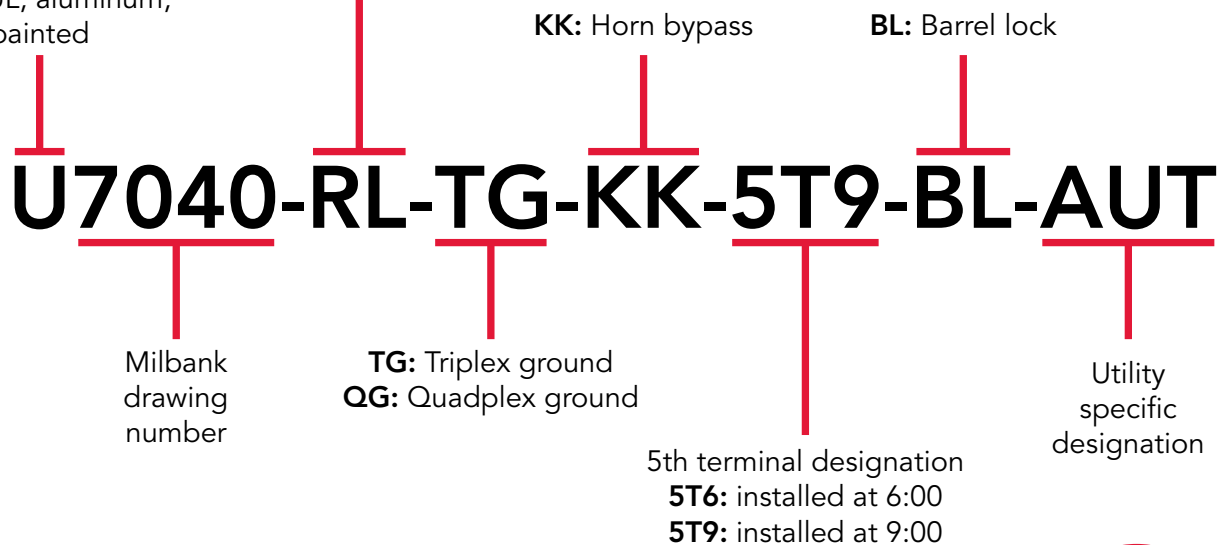

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Air Conditioner Disconnects

30-60 amp



U3802



U3812



U3832

Milbank's air conditioner disconnect has a removable hinged cover which makes wiring a breeze. Our compact design meets NEC wiring space requirements and also complies with NEC article 440-14. For safe working conditions, our disconnect pullers may be removed and reinstalled in the OFF position. Additionally, padlock provisions are included on the front cover. As with other Milbank products, our enclosure is constructed of G90U galvanized steel and electrostatically finished with an attractive, light gray, baked powder coating. Our epoxy/polyester resin blend offers a finish that is both durable and fade-resistant.

30-60 amp | 1Ø 240 VAC | Air Conditioner Disconnects

Catalog Number	amp	Type	Max H.P.	Weight (lbs.)	Line/Load Wire Range		Ground Wire Range CU/AL	Dimensions			Wire Rating	
					CU	AL		D"	W"	H"	CU °C	AL °C
U3802	60	Non-Fusible	10	3.25	#14-#2	#12-#2	#14-4	2½	5	7½	60°/75°	60°/75°
U3812	60	Non-Auto	10	3.25	#14-#2	#12-#2	#14-4	2½	5	7½	60°/75°	60°/75°
U3832	30	Fusible	3	2.5	#14-#3	#14-#3	#14-3	2⅞	5	7	60°/75°	60°
U3862	60	Fusible	10	3.3	#14-#3	#14-#3	#14-3	2⅞	5	9	60°/75°	60°/75°

Notes

- UL listed as Enclosed Pullout Switch
- Type 3R rainproof
- One-inch concentric knockouts



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Air Conditioner Disconnects

60 amp | With 20 amp GFCI Receptacle

7
AC
DISCONNECTS



U3822-20GWR

Specifications

- Meets NEC #406.8 requirements
- Meets NEC #210.63 requirements
- UL listed as Power Outlet
- Type 3R enclosure
- In-use cover*
- Duplex ground connector
- 1" concentric knockouts
- 1Ø, 240 volt
- 60 amp, non-fused
- 20 amp GFCI receptacle
- Reset/test button
- Weather and tamper resistant

60 amp | 1Ø, 240 Volt | Air Conditioner Disconnect with GFCI Receptacle

Catalog Number	Type	Max H.P.	Weight (lbs.)	Line/Load Wire Range		Ground Wire Range CU/AL	Dimensions			Wire Rating	
				CU	AL		D"	W"	H"	CU °C	AL °C
U3822-20GWR	Non-Fusible	10	6	#14-#2	#12-#2	#14-4	4⅝	5¼	7⅝	60°/75°	60°/75°

Notes

- **Disconnect Pullers:** To ensure the safest conditions, Milbank disconnect pullers are reversible so they may be reinstalled in the OFF position.
- **Padlock Provision:** All units are designed with a padlock provision on the cover for security.
- ***In-Use Cover:** Cover is rated as an in-use cover (cover may be closed with cords plugged into receptacle).

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Single Position Sockets




125 & 200 amp | 4 Terminal | Ringless | 600 VAC



U8435-RL-TG



U1980-O

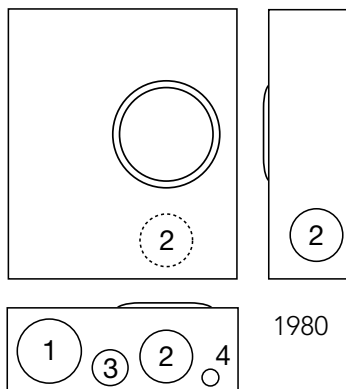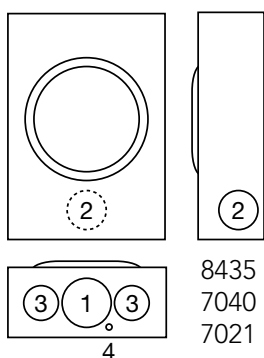

125 & 200 amp | 4 Terminal | Ringless

Catalog Number	amp	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts					
				Line	Load		D"	W"	H"	1	2	3	4	5	6
U8435-RL-TG	125	OH/UG	H.O.	#6-2/0	#6-2/0	None	3 $\frac{5}{16}$	8	11 $\frac{1}{2}$	1 $\frac{1}{2}$	1 $\frac{1}{2}$	2	1 $\frac{1}{4}$	—	$\frac{1}{4}$
U7021-RL-TG	200	OH	H.O.	#6-350 kcmil	#6-350 kcmil	None	4 $\frac{1}{8}$	8	15 $\frac{1}{2}$	2 $\frac{1}{2}$	2 $\frac{1}{2}$	2 $\frac{1}{2}$	—	$\frac{1}{4}$	$\frac{1}{4}$, $\frac{1}{2}$
U7040-RL-TG	200	OH/UG	H.O.	#6-350 kcmil	#6-350 kcmil	None	4 $\frac{1}{8}$	11	14 $\frac{5}{16}$	2 $\frac{1}{2}$	2 $\frac{1}{2}$	2 $\frac{1}{2}$	2 $\frac{1}{2}$	$\frac{1}{4}$, $\frac{1}{2}$	$\frac{1}{4}$
U1980-O	200	UG	Blank	#6-350 kcmil	#6-350 kcmil	None	4 $\frac{1}{2}$	13	15 $\frac{1}{4}$	2 $\frac{1}{2}$	2 $\frac{1}{2}$	3	1 $\frac{1}{2}$	2 $\frac{1}{2}$	$\frac{1}{4}$, $\frac{1}{2}$
U4413-O	200	UG	Blank	#6-350 kcmil	#6-350 kcmil	None	4 $\frac{1}{2}$	13	15 $\frac{1}{4}$	2 $\frac{1}{2}$	2 $\frac{1}{2}$	2 $\frac{1}{2}$	3	1 $\frac{1}{2}$	$\frac{1}{4}$, $\frac{1}{2}$

Notes

- **Hubs:** For proper hub selection see the hub suffix chart on the accessory page.
- **Fifth Terminal:** For field mounted fifth terminal, order catalog number **K5T** to fit into square opening at the 9 o'clock position of the *new style block* (#6-350 kcmil). Order catalog number **5T8K2** to fit into round opening at the 9 o'clock position of the *old style block* (#2-350 kcmil). Order catalog number **5T8K2** for **U8435**. For the **U7040** & **U1980-O**, order catalog number **K5T**.
- **Connectors:** Extruded aluminum connectors are tin plated. Units are supplied with triplex neutral.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.


Lever Bypass Single Position

200 amp | 5 Terminal | Ringless

9
LEVER BYPASS
SINGLE POSITION




U4581-RL-QG



4581



U4701-RL-QG



4184



U4184-X

200 Amp | 5 & 7 Terminal | Ringless | Heavy Duty Lever | 600 Vac

Catalog Number	Term	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts					
				Line	Load		D"	W"	H"	1	2	3	4	5	6
U4581-RL-QG	5	OH/UG	H.O.	#6-350 kcmil	#6-350 kcmil	Lever	4 $\frac{7}{8}$	13	19	3	2 $\frac{1}{2}$	3	3	$\frac{1}{4}$	$\frac{1}{4}$, $\frac{1}{2}$
U4701-RL-QG	7	OH/UG	H.O.	#6-350 kcmil	#6-350 kcmil	Lever	4 $\frac{7}{8}$	13	19	3	2 $\frac{1}{2}$	3	3	$\frac{1}{4}$	$\frac{1}{4}$, $\frac{1}{2}$
U4184-X*	7	OH/UG	C.P.	#6-350 kcmil	#6-350 kcmil	Lever	6	18	19 $\frac{1}{4}$	4	4	$\frac{1}{4}$, $\frac{1}{2}$	—	—	—

Notes

- **Connectors:** Extruded aluminum connectors are tin plated.
- The **U4581** has a manual center disconnect on the neutral / center phase.
- **Lever Bypass:** Lever supplies clamping action and operates bypass device.
- **Bonding Link:** **U4581-RL-QG** is factory bonded. Can be field isolated.


*Side Wireway

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Lever Bypass Single Position

320 amp | 4 & 5 Terminal | HD Lever Bypass | Ringless

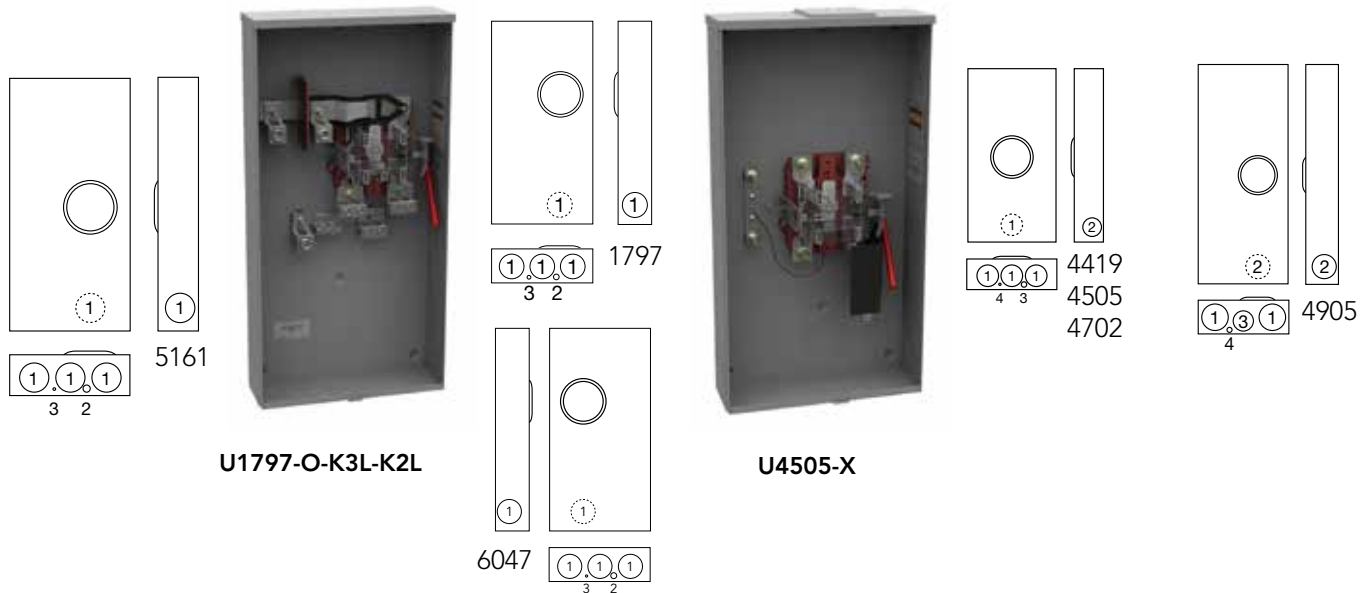

320 Amp | 4 & 5 Terminal | Ringless | Lever Bypass | 600 VAC

Catalog Number	Term	Service	Hub	Connectors CU/AL		Dimensions			Knockouts			
				Line	Load	D"	W"	H"	1	2	3	4
U4702-X	4	OH/UG	C.P.	3/8"-16 Stud	3/8"-16 Stud	4 7/8	15	28 1/4	3	1/4, 1/2	1/4	—
U4905-X*	4	OH/UG	C.P.	3/8"-16 Stud	3/8"-16 Stud	5 3/4	16	38 3/4	4	3 1/2	3	1/2
U1797-O-K3L-K2L*	4	UG	Blank	(1) #4-600 or (2) 1/0-250	Twin #6-350	4 7/8	15	30	3	1/2	1/4	—
U6047-O-K3L-K2L*	4	UG	Blank	(1) #4-600 or (2) 1/0-250	Twin #6-350	4 7/8	15	30	3	1/2	1/4	—
U4505-X	5	OH/UG	C.P.	3/8"-16 Stud	3/8"-16 Stud	4 7/8	15	28 1/4	3	3	1/2	1/4
U4419-X	5	OH/UG	C.P.	3/8"-16 Stud	3/8"-16 Stud	4 7/8	15	29	3	2 1/2	1/2	1/4

Notes

- **Hubs:** For proper hub selection see the hub suffix chart on the accessory page.
- **Lever Bypass:** Lever supplies clamping action and operates bypass device.
- **Connectors:** Stud type units supplied with 3/8"-16 hex head nuts with Belleville washers. For single lug connector kits, order as extra **K1539** (350 kcmil), **K3082** (350 kcmil) or **K3441** (600 kcmil). For twin lug connectors order as extra **K1350** (350 kcmil) or **K3442** (350 kcmil). Separate kits are required for both line and load.
- **Disconnect:** The **U4419** has a manual center disconnect on the neutral / center phase.
- **Phases:** The **U4505** & **U4419** are 1Ø3W or 3Ø3W.
- **Fifth Terminal:** For field installed fifth terminal order catalog no. **K3865**.
- ***Side Wireway**


Lever Bypass Single Position

320 amp | 7 Terminal | HD Lever Bypass | Ringless


1 1
LEVER BYPASS
SINGLE POSITION



U2594-X



U2120-X



320 Amp | 7 Terminal | Side Wireway | Ringless | 3Ø4W

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
			Line	Load		D"	W"	H"	1	2	3	4
U2594-X	OH/UG	C.P.	3/8"-16 Stud	3/8"-16 Stud	Lever	6 1/2	19	34 1/8	4	3	1	1/4
U2120-X	UG	C.P.	3/8"-16 Stud	3/8"-16 Stud	Lever	6 1/2	17 3/4	31 3/4	4	3	1	1/4

Notes

- **Hubs:** For proper hub selection see the hub suffix chart on the accessory page.
- **Lever Bypass:** Lever supplies clamping action and operates bypass device.
- **Connectors:** Stud type units supplied with 3/8"-16 hex head nuts with Belleville washers. For single lug connector kits, order as extra: **K3082** (350 kcmil) or **K3441** (600 kcmil). For twin lug connectors order as extra: **K3442** (350 kcmil). Separate kits are required for both line and load.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




Unmetered Load Center & Meter Mains


100-200 amp | 120/240 VAC




U5971-XL-200



U5842-RL-100

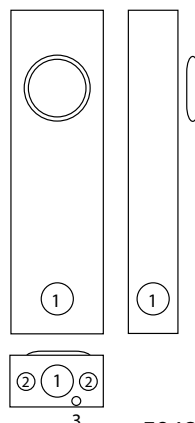

5842

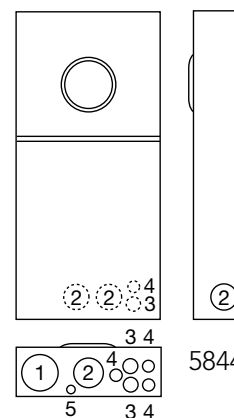

5844

100-200 Amp | Load Center with Main Breaker | 120/240V

Catalog Number	Main Breaker Amp	Branch Circuits	Service	Hub	Dimensions			Knockouts				
					D"	W"	H"	1	2	3	4	5
U5971-XL-100	100	10	OH/UG	C.P.	4½	14⅞	25⅞	3	2½	1	½, ¾	¼, ½
U5971-XL-150	150	8	OH/UG	C.P.	4½	14⅞	25⅞	3	2½	1	½, ¾	¼, ½
U5971-XL-200	200	8	OH/UG	C.P.	4½	14⅞	25⅞	3	2½	1	½, ¾	¼, ½

4 Terminal | Ringless Meter Main Models

Catalog Number	amp	Term	Service	WT (#)
U5842-RL-100	100	4	OH	26
U5842-RL-200	200	4	OH	26
U5844-PXL	200	4	OH/UG	37
U5844-PXL-100	100	4	OH/UG	37
U5844-PXL-150	150	4	OH/UG	37
U5844-PXL-200	200	4	OH/UG	37

Notes

- **AIC Rating:** All models are rated 22K AIC when Siemens breakers are used.
- **Hub:** OH/UG units supplied with one (1) closing plate packed inside.
- **Fifth Terminal:** For field installed 208Y/120 network service order **K5T**. Installs in the 9 o'clock position.

*2 pole position.

Main Circuit Breaker Chart

Amperage	60	100	150	200
10KAIC Breaker Model	Q260	Q2100	QN2150	QN2200
22KAIC Breaker Model	Q260H	Q2100H	QN2150H	QN2200H



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.


Meter Main with Load Center

1 3
METER MAIN

100-200 amp | 4 Terminal | Ringless




U5168-XTL-200

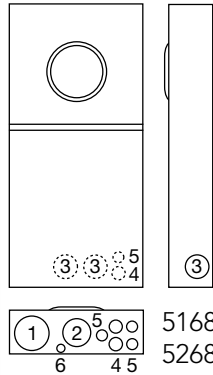

5168
5268



U5898-O-200

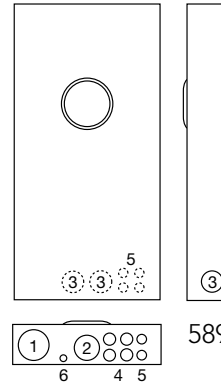

5898

100-200 amp | 4 Terminal | Meter Main | 22K AIC | 120/240 Volt | 1Ø3W

Catalog Number	Avail. Circuits	Service	Hub	Connectors CU/AL		Dimensions			Knockouts					
				Line	Load	D"	W"	H"	1	2	3	4	5	6
U5168-XTL-100**	10	OH/UG	C.P.	#6-350 kcmil	#6-350 kcmil Breaker	4½	14⅞	30	2	2	3	2½	½, ¾, 1	½, ¾
U5168-XTL-150**	8	OH/UG	C.P.	#6-350 kcmil	#6-350 kcmil Breaker	4½	14⅞	30	2	2	3	2½	½, ¾, 1	½, ¾
U5168-XTL-200**	8	OH/UG	C.P.	#6-350 kcmil	#6-350 kcmil Breaker	4½	14⅞	30	2	2	3	2½	½, ¾, 1	½, ¾
U5268-XTL-200	20	OH/UG	C.P.	#6-350 kcmil	Breaker	4½	14⅞	30	2	2	3	2½	½, ¾, 1	½, ¾
*U5898-O-200**	8	OH/UG	C.P.	#6-350 kcmil	#6-350 kcmil	4½	17	34½	2	3	2½	1	½, ¾	¼, ¾

Notes

- **Hub:** Supplied with (2) closing plates inside. Order hubs as a separate item. See accessory page for hub options and twin hub openings.
- **Interior:** U5168 and U5898 units have 8-circuit interior; U5268 units have 20-circuit interior.
- **Fifth Terminal:** Order K5T and field install for 208Y/120 network systems. Installs in the 9 o'clock position only for U5168 and U5268. In U5898, it can be rotated to 6 o'clock position.
- **Main Breakers:** Rated 22K AIC.
- **Interlock Kit:** For generator auxiliary circuit breaker interlock, order K5815 for large QN with small frame Q; order K5820 for large frame QN with large frame QN. K5830 for small frame Q with small frame Q.
- **Sub-Feed Lugs:** #6-350 kcmil sub-feed lugs provided on 8-circuit interior. Order K3701 for 20-circuit interior.

**Feed through Lugs

*Side Wireway


Branch Breaker Chart

AIC Rating	Amps	Siemens	Cutler Hammer	General Electric	Square D
10k	150-200	QNR	BR (150A only)	—	—
	≤ 125	QP	HQP, BR	THQL, THQL-GF	Homeline
22k	150-200	QNRH	—	—	—
	≤ 125	QPH	—	—	—

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



200 amp | 7 Terminal | Ringless | 240 VAC

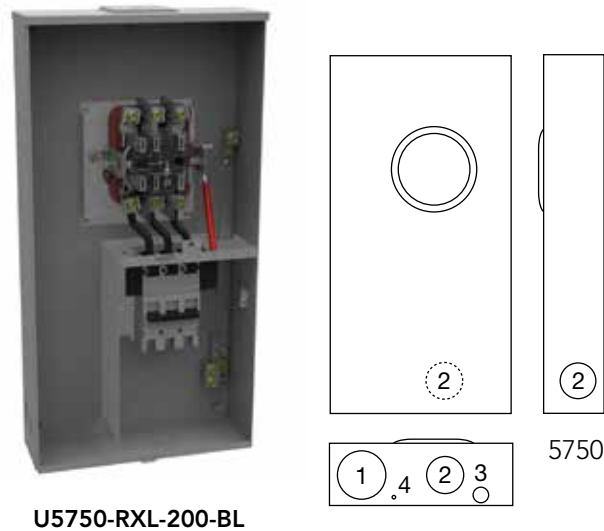

U5750-RXL-200-BL

200 amp | 7 Terminal | Meter Main | Ringless | 3Ø4W

Catalog Number	Amps	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
			Line	Load		D"	W"	H"	1	2	3	4
U5750-RXL-200-BL	OH	C.P.	#6-350	C/B	Lever	5 $\frac{3}{4}$	17 $\frac{3}{8}$	34	4	3	1	$\frac{1}{4}$

Notes

- **Hubs:** For proper hub selection see the hub suffix chart on the accessory page.
- **Bypass:** The lever supplies clamping action on the meter spade and also operates the bypass device.
- **Breaker:** Factory installed 200 amp, 3-pole, 10,000 AIC.




Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Meter Main

320 amp | 4 Terminal | Ringless

15
MATER MAIN

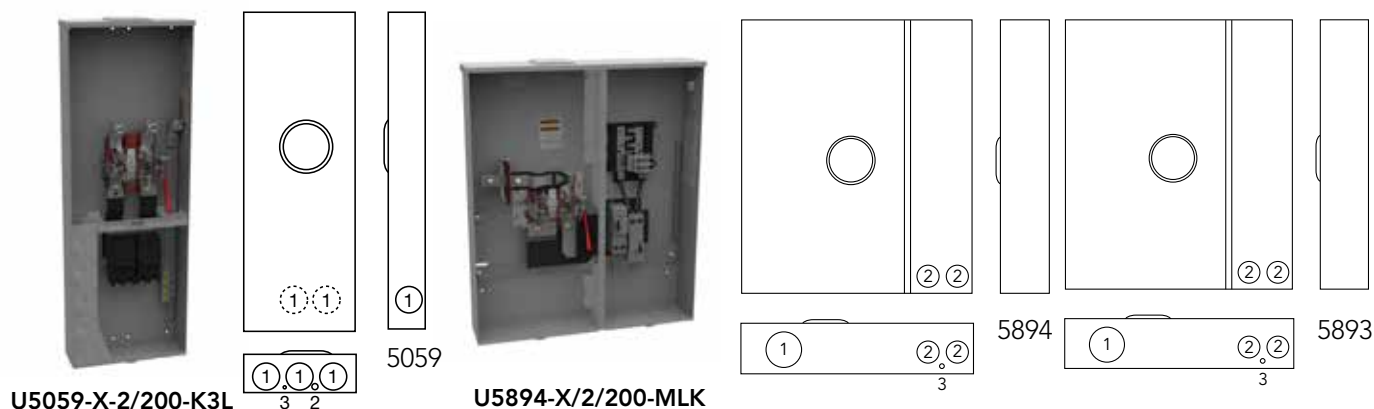

320 Amp Meter Main with Breakers | 1Ø3W | Ringless | 120/240 VAC

Catalog Number	Service	Hub	Connectors CU/AL		Fifth Term. Kit	Bypass	Dimensions			Knockouts		
			Line	Load			D"	W"	H"	1	2	3
U5059-X-2/200-K3L*	OH/UG	C.P.	#4-600 kcmil	#1/0-300 kcmil	K3866	Lever	4 ⁷ / ₈	15	42	3	1/2	1/4

Notes

- **Lever Bypass:** Lever supplies clamping action and operates bypass device.
- **Connectors:** Sockets are supplied with 3/8" - 16 hex head nuts with Belleville washers. For connector lug kits, order as extra from chart on accessory page. Lug kit required for line side only.
- ***Breakers:** Supplied with (2) Milbank **UQFPH-200** breakers rated at 22K AIC.

320 Amp Meter Main with Breakers | Lever Bypass | 1Ø3W | Ringless | 120/240 VAC

Catalog Number	Service	Hub	Connectors CU/AL		Fifth Term. Kit	Side Buss	Dimensions			Knockouts		
			Line	Load			D"	W"	H"	1	2	3
U5890-X-2/200	OH/UG	C.P.	Studs	#1/0-300	K3865	None	6	24 ¹ / ₂	35	4	2 ¹ / ₂	1/4
U5892-X-2/200** ¹	OH/UG	C.P.	Studs	#1/0-300	K3865	None	6	29 ¹ / ₂	35	4	2 ¹ / ₂	1/4
U5893-X-2/200						Yes	6	24 ¹ / ₂	35	4	2 ¹ / ₂	—
U5894-X-2/200-MLK* ²	OH/UG	C.P.	Studs	#1/0-300	K3865	Yes	6	29 ¹ / ₂	35	4	2 ¹ / ₂	1/4

Notes

- **Breakers:** U5890 installed with **QN2200H** breakers. U5894 and U5895 installed with left breaker **QN2200H** and right breaker **QN2200RH**.
- ¹ **Sub-Feed Lugs:** #6-350 kcmil sub-feed lugs provided on 8-circuit interior. Order **K3701** for 20-circuit interior or -MLK for factory installed.
- ² **Side Wireway**
*12-circuit load center
**24-circuit load center

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



320 Amp Meter Mains


Single 400 Amp Main Breaker



U6228-X-400



U6230-X-400

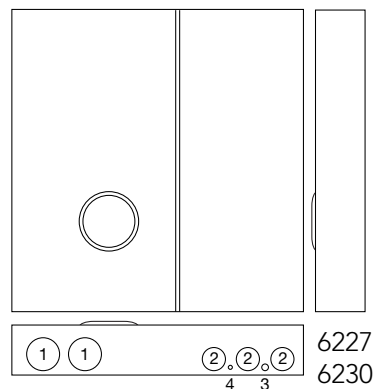

400 Amp Meter Main | 4 Terminal | 1Ø3W | 480 VAC

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
			Line	Load		D"	W"	H"	1	2	3	4
U6227-X-400	OH/UG				Lever	6	36¼	34	4	2½	½	¼
U6228-X-400	OH/UG				Lever	6	36¼	34	4	2½	½	¼

400 Amp Meter Main | 7 Terminal | 3Ø4W | 480 VAC

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
			Line	Load		D"	W"	H"	1	2	3	4
U6229-X-400	OH/UG				Lever	6	36¼	34	4	2½	½	¼
U6230-X-400	OH/UG				Lever	6	36¼	34	4	2½	½	¼

Notes

- Side Buss Units: U6228 and U6230.


320 Amp Meter Mains

320 Amps | 7 Terminals | Ringless | HD Lever
2/200 amp Main Breakers

17
320 AMP
METER MAIN



U6115-X-2/200-K7L

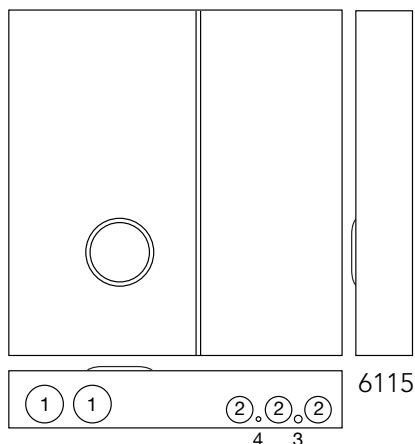

320 Amp Meter Main with Breakers | 3Ø4W | Ringless | 480 VAC

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
			Line	Load		D"	W"	H"	1	2	3	4
U6115-X-2/200	OH/UG	C.P.			Lever	7	34¼	34	4	2½	½	¼

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




Multi-Position Sockets

100 Amp | 4 Terminal | Ringless




U8212-RL



8212




U4252-RXL-K2



1252-3
4252



U1252-RRL

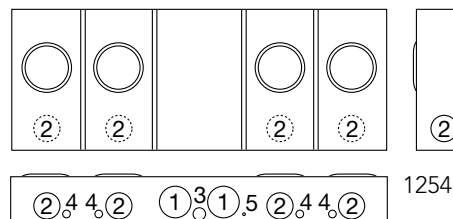

1254-6

100 Amp | Position | 4 Terminal | Ringless | 1Ø3W

Catalog Number	No. of Pos.	Hub	Service	Connectors CU/AL		Dimensions			Knockouts				
				Line	Load	D"	W"	H"	1	2	3	4	5
U8212-RL	2	H.O.	OH/UG	#6-350 kcmil	#6-2/0	4½	20⅝	16	2	2	2	2½	¼, ½
U8213-RL	3	H.O.	OH/UG	#6-350 kcmil	#6-2/0	4½	28½	16	2	2	2	2½	¼, ½
U8214-RL	4	H.O.	OH/UG	#6-350 kcmil	#6-2/0	4½	40⅞	16	2	2	2	2½	¼, ½
U8215-RL	5	H.O.	OH/UG	#6-350 kcmil	#6-2/0	4½	48⅞	16	2	2	2	2½	¼, ½
U8216-XL	6	C.P.	OH/UG	#6-350 kcmil	#6-2/0	4½	57⅞	16	2	2	2	2½	¼, ½

200 Amp | Position | 4 Terminal | Ringless | 1Ø3W

Catalog Number	No. of Pos.	Hub	Service	Connectors CU/AL		Dimensions			Knockouts					
				Line	Load	D"	W"	H"	1	2	3	4	5	6
U4252-RXL-K2	2	C.P.	OH/UG	⅜"-16 Stud	#6-350 kcmil	5⅞	26½	14	3	2½	—	1¼	¼	—
U1252-REL-K1	2	2½	OH/UG	⅜"-16 Stud	#6-350 kcmil	5⅞	26½	14	2½	3	2½	½	¼	½, ¾, 1
U1253-X	3	C.P.	OH/UG	⅜"-16 Stud	#6-350 kcmil	5⅞	34⅞	14	2½	3	2½	½	¼	¼, ½, 1
U1254-X	4	C.P.	OH/UG	⅜"-16 Stud	#6-350 kcmil	5⅞	42⅞	16	2½	3	2½	½	¼	¼, ½, 1
U1255-X	5	C.P.	OH/UG	⅜"-16 Stud	#6-350 kcmil	5⅞	54⅞	16	2½	3	2½	½	¼	¼, ½, 1
U1256-X	6	C.P.	OH/UG	⅜"-16 Stud	#6-350 kcmil	5⅞	63⅞	18	2½	3	2½	½	¼	¼, ½, 1

Notes

- **Hub:** For proper hub selection refer to the hub suffix chart on the accessory page. For the **U1254-6** two hub openings are supplied and the extra opening is closed with a closing plate as standard. For the **U8212** a hub opening is supplied at each end and the extra opening is closed with a closing plate as standard.
- **Fifth Terminal:** For field mounted fifth terminal for **U8212-6**, order **5T8K2** (6 o'clock position). For field mounted fifth terminal for **U4252 & U1252-6**, order catalog number **K5T** (9 o'clock position).
- **Connectors:** Extruded aluminum connectors are tin plated.
- **Bussing:** Bussing is 5/16" x 1" aluminum on the **U1252-1253**, **U4252** and the **U8212-6**. On the **U1254-6** gangs the bussing is ⅜" x 1" aluminum.
- **Note:** See chart on page 32 for gang socket overall ampacities.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Multi-Position Meter Main

125 & 200 amp | 4 Terminal | Ringless | 240 VAC

19
MULTI-POSITION
METER MAIN



U5882-X



U5884-X

125 amp | Position

Catalog Number	Amp	Positions	Term	Service	WT (#)
U5902-X	100	2	4	OH/UG	58
U5903-X	100	3	4	OH/UG	88
U5904-X	100	4	4	OH/UG	107
U5905-X	100	5	4	OH/UG	128
U5906-X	100	6	4	OH/UG	146

200 amp | Position

Catalog Number	Amp	Positions	Term	Service	WT (#)
U5882-X	200	2	4	OH/UG	58
U5883-X	200	3	4	OH/UG	88
U5884-X	200	4	4	OH/UG	107
U5885-X	200	5	4	OH/UG	128
U5886-X	200	6	4	OH/UG	146

Notes

- **AIC Rating:** All models are rated 22K AIC.
- **Hub:** Units supplied with one (1) closing plate. Order hubs separately, see accessory page.
- **Fifth Terminal:** For field installed 208Y/120 network service, order **K5T**. Installs in the 9 o'clock position.






Circuit Breaker Chart

Manufacturer	10K Models	22K Models
Siemens	QP, QN	QPH, QNH
Cutler-Hammer	BR, HPQ, QPGF	—
Square D G.E. (50 Amp Max.)	Homeline THQL, THQL-GF	—

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Knockouts				
1	2	3	4	5
3	2½	1	⅞	¼

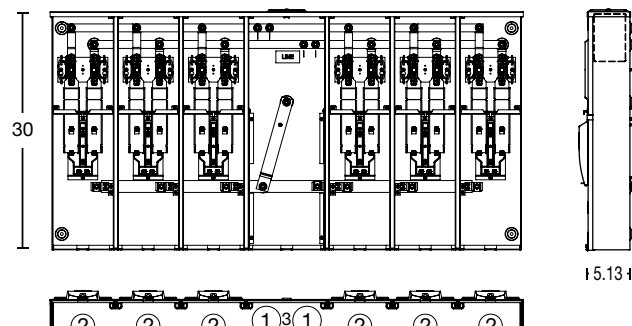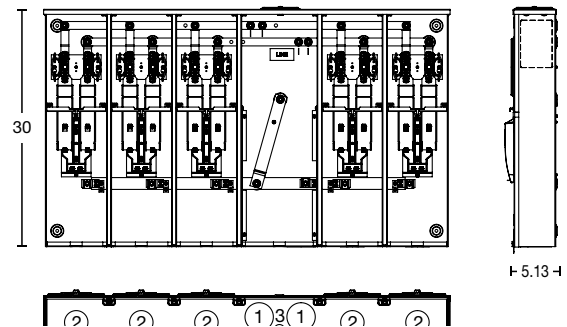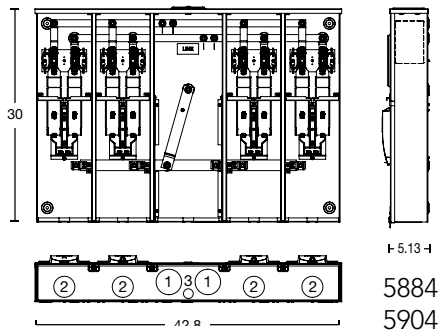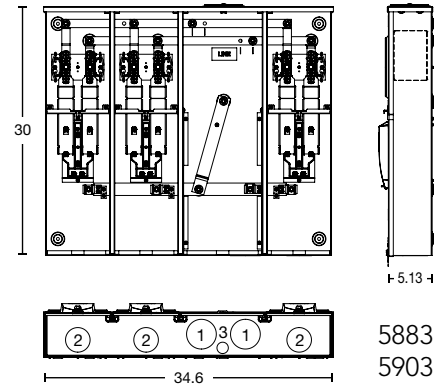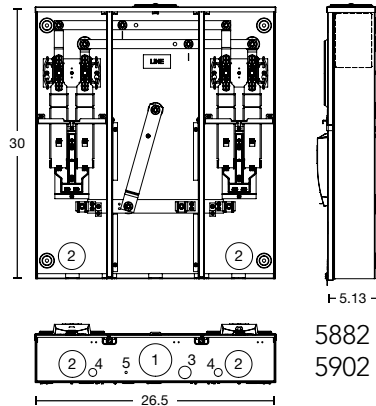

Multi-Position Meter Main

125 & 200 amp/Position | 4 Terminal | Ringless | 120/240 VAC

21
MULTI-POSITION
METER MAIN



U2866-X



U2854-X

VERTICAL

125 Amp/Position

No. of Pos.	Catalog Number	Main Bus Rating	Line Connector Size
2	U2852-X	200 Amp	* $\frac{3}{8}$ " -16 Stud
3	U2853-X	200 Amp	* $\frac{3}{8}$ " -16 Stud

200 Amp/Position

No. of Pos.	Catalog Number	Main Bus Rating	Line Connector Size
2	U2862-X	250 Amp	* $\frac{3}{8}$ " -16 Stud
3	U2863-X	300 Amp	* $\frac{3}{8}$ " -16 Stud

RECTANGULAR

125 Amp/Position

No. of Pos.	Catalog Number	Main Bus Rating	Line Connector Size
4	U2854-X	400 Amp	* $\frac{3}{8}$ " -16 Stud
5	U2855-X	400 Amp	* $\frac{3}{8}$ " -16 Stud
6	U2856-X	400 Amp	* $\frac{3}{8}$ " -16 Stud

200 Amp/Position

No. of Pos.	Catalog Number	Main Bus Rating	Line Connector Size
4	U2864-X	400 Amp	* $\frac{3}{8}$ " -16 Stud
5	U2865-X	600 Amp	* $\frac{3}{8}$ " -16 Stud
6	U2866-X	600 Amp	* $\frac{3}{8}$ " -16 Stud

Connector Kits *

Size	Suffix	Kit Number	Compatible With	Wire Range
Single	-K1	K1359	U2852-56 U2862-66	#6-350 kcmil
	-K3	K1540	U2854-56 U2864-66	#4-600 kcmil
Twin	-K2	K1350	U2854-56 U2863-66	#6-350 kcmil
	-K4	K1541	U2864-66	#2-600 kcmil

Notes

- ***Connectors:** For line wire connector kits, order separately.
- **Fifth Terminals:** For field mounted fifth terminal order catalog number **K2381**. Order one per meter position (9 o'clock position only).
- **Breakers:** Units have provision for one double pole main per meter position. Breakers not included. Order as extra Milbank.

Plug-In Breaker Compatibility Chart

Amps	Cutler-Hammer (Westinghouse)	Siemens (ITE)	Siemens Murray/ Crouse-Hinds	G.E.	SQ-D
125-200	HQP/ BR / WBJ	QNR	MD	Q Line	—
≤ 100	QP / BR / HQP	QP	MP	Q Line	Homeline

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



[illegible]

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.


Temp Power

4 Terminal | 240 VAC

is there a reason we have the 5101 pictured but no extra row in the chart?




U4908-O-11GR

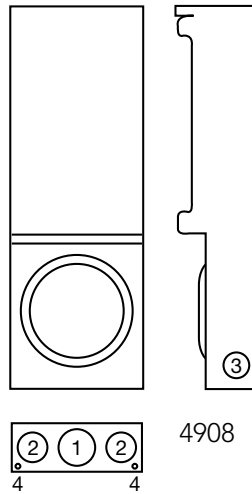

4908



U5101-XL-75

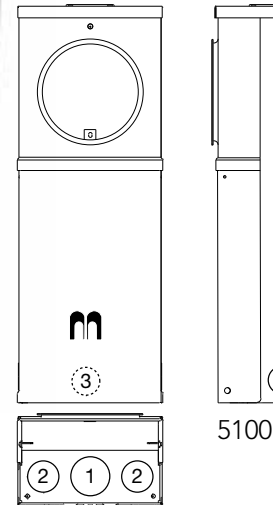

5100

320 Amp Meter Main with Breakers | 3Ø4W | Ringless | 277/480 VAC

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
			Line	Load		D"	W"	H"	1	2	3	4
U4908-O-11GR						13 ⁵ / ₁₆	9	25 ⁵ / ₁₆	2	1 ¹ / ₂	1 ¹ / ₄	¹ / ₄

Specifications

- Available in ringless style (**U4908** series) or ring type (**U4909** series).
- UL Listed 100 Amp, 120/240 Volt – 1Ø Underground Service Power Outlet. (**U4908-UG** and **U5101-OH**)
- Type 3R welded enclosure for durable outdoor use.
- Hub opening with closure plate. (**U5101**)
- Wire terminations accept copper or aluminum conductors. (**U4908**)
Service-Line & Neutral: (1) #6-2/0
Load Ground: (2) 1/0-#14 & (4) #6-#14
Load Neutral: (2) 1/0-#14 & (4) #6-#14
Service Ground: #2-#8
- Wire terminations accept copper or aluminum conductors. Loop feed not available. (**U5101**)
Line: (1) #6-250 kcmil
Ground: (2) 1/0-#14 & (4) #6-#14
Neutral: (2) 1/0-#14 & (4) #6-#14
- Four terminal, ringless meter socket with stainless steel locking hasp.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




Surface Mount Power Outlet


Millennium Series | Metered & Unmetered | 120/240 VAC



U5000-XL-75

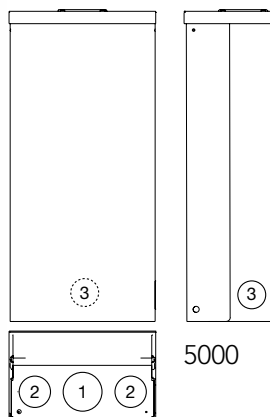

U5100-XL-75

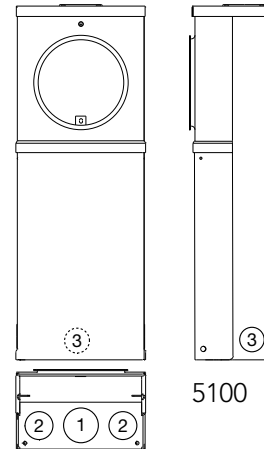

125 Amp | Surface Mount Power Outlets

Catalog Number	Metered/ Unmetered	Receptacle Configuration	Circuit Breaker Configuration	Loop Feed	Connectors - Line	Dimensions			Knockouts		
						D"	W"	H"	1	2	3
U5000-XL	Unmetered	—	—	Yes	(2) #14-2/0	5¼	9⅞	19¼	2	1½	1¼
U5000-XL-41	Unmetered	A	X	Yes	(2) #14-2/0	5¼	9⅞	19¼	2	1½	1¼
U5000-XL-55	Unmetered	B	Y	Yes	(2) #14-2/0	5¼	9⅞	19¼	2	1½	1¼
U5000-XL-75	Unmetered	C	Z	Yes	(2) #14-2/0	5¼	9⅞	19¼	2	1½	1¼
U5100-XL	Metered	—	—	No	#6-250	5¼	9⅞	25	2	1½	1¼
U5100-XL-41	Metered	A	X	No	#6-250	5¼	9⅞	25	2	1½	1¼
U5100-XL-55	Metered	B	Y	No	#6-250	5¼	9⅞	25	2	1½	1¼
U5100-XL-75	Metered	C	Z	No	#6-250	5¼	9⅞	25	2	1½	1¼

Receptacle Configurations

A	B	C
(1) TT30R, (1) 5-20R GFI	(1) 14-50R, (1) 5-20R GFI	(1) 14-50R, (1) TT30R, (1) 5-20R GFI

NOTE

Contact factory for additional configurations not shown here.

Circuit Breaker Configurations

X	Y	Z
(1) 30A, 1P, 120V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 30A, 1P, 120V (1) 20A, 1P, 120V



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Power Outlet Pedestals

Millennium Series | Metered & Unmetered | 120/240 VAC

25
POWER OUTLET
PEDESTALS





U5200-XL-75

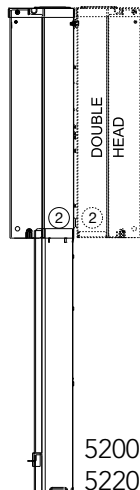

5200
5220



U5300-O-75

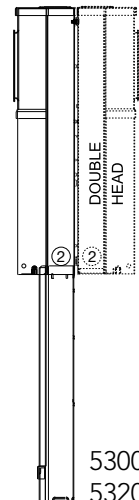

5300
5320

125 Amp | Power Outlet Pedestals | Direct Burial

Catalog Number	Double Head Catalog Number	Metered/ Unmetered	Receptacle Configuration	Circuit Breaker Configuration	Dimensions			Knockouts
					D"	W"	H"	1
U5200-XL	U5220-XL	Unmetered	—	—	5 $\frac{5}{16}$	9 $\frac{1}{8}$	64 $\frac{1}{2}$	1 $\frac{1}{4}$
U5200-XL-41	U5220-XL-41	Unmetered	A	X	5 $\frac{5}{16}$	9 $\frac{1}{8}$	64 $\frac{1}{2}$	1 $\frac{1}{4}$
U5200-XL-55	U5220-XL-55	Unmetered	B	Y	5 $\frac{5}{16}$	9 $\frac{1}{8}$	64 $\frac{1}{2}$	1 $\frac{1}{4}$
U5200-XL-75	U5220-XL-75	Unmetered	C	Z	5 $\frac{5}{16}$	9 $\frac{1}{8}$	64 $\frac{1}{2}$	1 $\frac{1}{4}$
U5300-O	U5320-O	Metered	—	—	5 $\frac{5}{16}$	9 $\frac{1}{8}$	70 $\frac{1}{4}$	1 $\frac{1}{4}$
U5300-O-41	U5320-O-41	Metered	A	X	5 $\frac{5}{16}$	9 $\frac{1}{8}$	70 $\frac{1}{4}$	1 $\frac{1}{4}$
U5300-O-55	U5320-O-55	Metered	B	Y	5 $\frac{5}{16}$	9 $\frac{1}{8}$	70 $\frac{1}{4}$	1 $\frac{1}{4}$
U5300-O-75	U5320-O-75	Metered	C	Z	5 $\frac{5}{16}$	9 $\frac{1}{8}$	70 $\frac{1}{4}$	1 $\frac{1}{4}$

Receptacle Configurations

A	B	C
(1) TT30R, (1) 5-20R GFI	(1) 14-50R, (1) 5-20R GFI	(1) 14-50R, (1) TT30R, (1) 5-20R GFI

NOTE

Contact factory for additional configurations not shown here.

Pad mount is available. Contact factory for information.

Circuit Breaker Configurations




X	Y	Z
(1) 30A, 1P, 120V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 30A, 1P, 120V (1) 20A, 1P, 120V



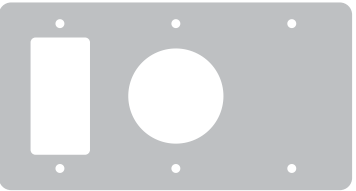
Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.







Replacement Receptacle Plates

For Millennium Series RV Products

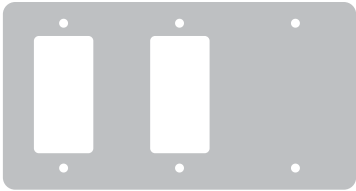		
K5920-75	K5920-10GR	K5920-54

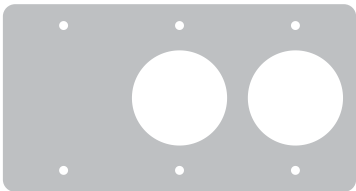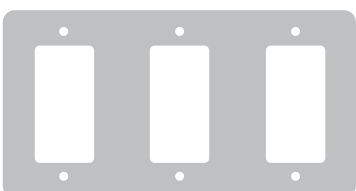		
K5920-11GR	K5920-522	K5920-41

		
K5920-58	K5920-111GR	K5920-BLANK


K5920-38


Notes

- For application details, consult factory.


Lighting Accessories

For Millennium Series Products


Internal LED Light Kits for **Unmetered** Power Outlets (U5000 & U5200)

Application	Internal light kit for unmetered power outlets	
LED Features	Includes new LED light , lamp shield and opaque hinge cover lens. Factory wired to 20 amp GFI circuit. May be wired to separate 20 amp circuit breaker. Order Q120 separately. Cover on unmetered power outlet is 19 $\frac{1}{8}$ " in height.	
Ordering	Order with -LD suffix (after catalog number) for factory installed. Order catalog number K6212 for field installed.	

Internal Florescent Light Kits for **Unmetered** Power Outlets (U5000 & U5200)

Application	Internal light kit for unmetered power outlets	
Fluorescent Features	Includes 5-watt fluorescent lamp socket, ballast, lamp shield and opaque hinge cover lens. Factory wired to 20 amp GFI circuit. May be wired to separate 20 amp circuit breaker. Order Q120 separately. Cover on unmetered power outlet is 19 $\frac{1}{8}$ " in height.	
Ordering	Order with -L suffix (after catalog number) for factory installed. Order catalog number K5411 for field installed.	

Photoelectric Light Control Kit

Application	Photoelectric light control kit for K5411 light kits.	
Features	2.5 amp, 120 volt photo electrical control wired in series with K5411 light kits.	
Ordering	Order with -LPC suffix for factory installed light and PE control. Order catalog number K5413 for field installed.	


WARNING!


Always disconnect power prior to installing these devices.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




Internal Light Kits for Metered Power Outlets (U5100 & U5300)

Application	Internal light kit for metered power outlets	
LED Features	Includes new LED light , lamp shield and opaque hinge cover lens. Factory wired to 20 amp GFI circuit. May be wired to separate 20 amp circuit breaker. Order Q120 separately. Cover on metered power outlet is 15¼" in height.	
Ordering	Order with -LD suffix (after catalog number) for factory installed. Order catalog number K6213 for field installed.	


Application	Internal light kit for metered power outlets	
Fluorescent Features	Includes 5-watt fluorescent lamp socket, ballast, lamp shield and opaque hinge cover lens. Factory wired to 20 amp GFI circuit. May be wired to separate 20 amp circuit breaker. Order Q120 separately. Cover on metered power outlet is 15¼" in height.	
Ordering	Order with -L suffix (after catalog number) for factory installed. Order catalog number K5412 for field installed.	

Photoelectric Light Control Kit

Application	Photoelectric light control kit for K5412 light kits.	
Features	2.5 amp, 120 volt photo electrical control wired in series with K5412 light kits.	
Ordering	Order with -LPC suffix for factory installed light and PE control. Order catalog number K5413 for field installed.	

WARNING!

Always disconnect power prior to installing these devices.




Telecom and Pedestal Accessories

For Millennium Series RV Products

29

TELECOM &
PEDESTAL
ACCESSORIES


Telephone and Cable TV Kit


Application	Mounts to rear of pedestal series U5200 and U5300 . May also be adaptable to a wooden or similar structure.	
Features	<p>Single: 16" galvanized raceway, (1) RJ11 telephone jack and (1) Type F coaxial CATV jack.</p> <p>Dual: 16" galvanized raceway, (2) RJ11 telephone jacks and (1) Type F coaxial CATV jack.</p> <p>Includes mounting hardware and instructions.</p>	
Ordering	Single line telephone and cable TV kit order K4709-02 .	
Note	Confirm acceptability with Cable TV and Telephone provider before ordering or installing these devices.	

K4709-02-3R

K4709-02

Water Shroud with Hardware

Application	Used to cover water pipe and provide means to mount hose bib to rear of pedestal.	
Features	<p>Includes mounting hardware and instructions.</p> <p>Matches K4709 kits when mounted side-by-side.</p>	
Ordering	Order catalog number K4709-WS .	

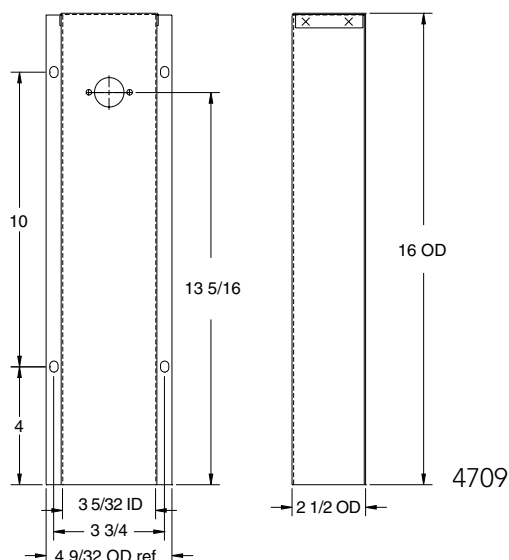


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




Pedestal Mounting Accessories

For Millennium Series RV Products


Field-Installed Pad Mount Kit

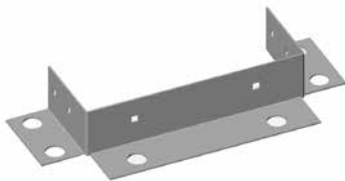Application	Field installed pad mount kit with (6) $\frac{3}{4}$ " mounting holes.	
Features	Includes $\frac{1}{4}$ -20 stainless steel hardware to attach pad mount base to post. Anchor bolt kit sold separately (order catalog number K5421).	
Ordering	Order catalog number K5410 .	

Stabilizer Foot with Hardware

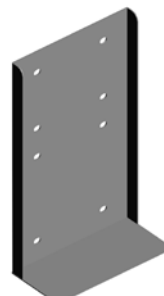Application	Stabilizes direct burial type posts in unstable soil conditions.	
Features	Includes $\frac{1}{4}$ -20 hardware to attach to U5200 and U5300 pedestals.	
Ordering	Order catalog number K5415 .	

Anchor Bolt Kit

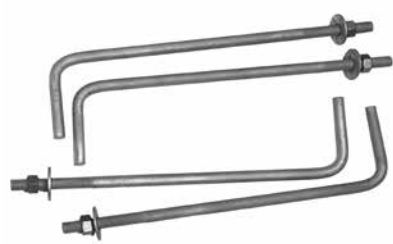
Application	Concrete anchor bolt kit designed to attach pad mount base to concrete.	
Features	(4) sets of zinc-plated $\frac{5}{8}$ -11 x 10" bolt with 2" toe. Includes nut and flat washer.	
Ordering	Order catalog number K5421 .	

Metering & Receptacle Accessories


For Millennium Series RV Products

31
METERING &
RECEPTACLE
ACCESSORIES




Field-Installed Meter Kits


Application	Field installed meter kit for U5000 and U5200 power outlets.	
Features	100 amp cast meter socket, CL200 E-Z Read Meter, sealing ring, security seal, 1" Milbank hub, nipple and mounting screws. See CL200 for Watt-hour meter specification.	
Ordering	Order catalog number K4800-01 .	

E-Z Read Watt-Hour Meter

Application	200 amp E-Z read watt-hour meter designed to be field installed on the U5100 and U5300 metered power outlets.	
Features	200 amp form 2S 120/240 volt. Numeric readout in full kilowatt increments. No "tenths" dial. Remanufactured to 1% accuracy.	
Ordering	Order catalog number CL200 or CL200D	

Single Receptacle Only Power Outlet

Application	Overhead/underground power outlet receptacle, suitable for RV, temporary service, campground, marina and boatyard equipment.		
Features	Type 3R, 120/240 volt single phase. Lockable cover.		
Ordering	Order catalog number from chart below.		
Receptacle Options	<div></div> <div>P-10GWR 20A 5-20GR 120V GFI</div>	<div></div> <div>P-13 30A TT-30R 120V</div>	<div></div> <div>P-54 50A 14-50R 120/240V</div>










Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.









Replacement Parts & Accessories

For Millennium Series RV Products

			
Q120 20 amp, 1 pole circuit breaker	708784-MO 20 amp, 1 pole GFI circuit breaker	Q130 30 amp, 1 pole circuit breaker	Q250 50 amp, 2 pole circuit breaker

		
Z918466-AC Lug landing base	Z917602-AC Circuit breaker base (6-circuit)	Z915141-AC Left or right meter block assembly

		
Z918449-AC (19" unmetered) Z918447-AC (15" metered) Hinge cover	Z818052-SC (19" unmetered) Z818480-SC (15" metered) Deadfront	MR-2 Snap action sealing ring

		
Z708080-MO 20 amp GFI receptacle NEMA 5-20GR	Z701776-MO 30 amp receptacle NEMA TT-30	Z708767-MO 50 amp receptacle NEMA 14-50R

Circuit Breakers

UQFP Plug-In & UQFB Bolt-On Series | 120/240 VAC

33
CIRCUIT
BREAKERS



UQFP
UQFPH



UQFP-M
UQFPH-M



UQFB-X1



UQFBH

200 amp Frame | Plug-In | 10,000 AIC & 22,000 AIC | Two-Pole - Common Trip

amp	10K AIC Plug-In	22K AIC Plug-In	10K AIC Plug-In	22K AIC Plug-In	Wire Range	
					CU	AL
100	UQFP-100	UQFPH-100	UQFP-M-100	UQFPH-M-100	#3-#1	#1-1/0
125	UQFP-125	UQFPH-125	UQFP-M-125	UQFPH-M-125	#3-#1	#1-1/0
150	UQFP-150	UQFPH-150	UQFP-M-150	UQFPH-M-150	1/0-300	2/0-300
175	UQFP-175	UQFPH-175	UQFP-M-175	UQFPH-M-175	1/0-300	2/0-300
200	UQFP-200	UQFPH-200	UQFP-M-200	UQFPH-M-200	1/0-300	2/0-300

200 amp Frame | Bolt-On | 10,000 AIC & 22,000 AIC | Two-Pole - Common Trip

amp	10K AIC Bolt-On	22K AIC Bolt-On	10K AIC Bolt-On	22K AIC Bolt-On	Wire Range	
					CU	AL
100	UQFB-100	UQFBH-100	UQFB-100-X1	UQFBH-M-100	#3-#1	#1-1/0
125	UQFB-125	UQFBH-125	UQFB-125-X1	UQFBH-M-125	#3-#1	#1-1/0
150	UQFB-150	UQFBH-150	UQFB-150-X1	UQFBH-M-150	1/0-300	2/0-300
175	UQFB-175	UQFBH-175	UQFB-175-X1	UQFBH-M-175	1/0-300	2/0-300
200	UQFB-200	UQFBH-200	UQFB-200-X1	UQFBH-M-200	1/0-300	2/0-300

Notes

- **UL Listed:** For use with 60°C or 75°C wire.
- **UQFP:** For parallel main circuit breaker applications.
- **UQFP-M:** For series main circuit breaker applications Split load tab features allow for feed-through capability.
- **UQFB:** (2) 1/0-300 lugs provided on load and line side (cable-in, cable-out).
- **UQFB3:** Three-pole available. Consult factory.
- **UQFB-X:** (2) 1/0-300 lugs provided on load side and (2) line bar bus connections on line side.
- **UQFB-M:** For series main circuit breaker applications. Split load tab features allow for feed-through capability.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



15–125 amp Breaker Plug-In Type | 1" Per Pole

amp	Poles	10K AIC Plug-In	22K AIC Plug-In
15	Single	Q115	Q115H
15	Double	Q215	Q215H
20	Single	Q120	Q120H
20	Double	Q220	Q220H
25	Single	Q125	Q125H
25	Double	Q225	Q225H
30	Single	Q130	Q130H
30	Double	Q230	Q230H
35	Single	Q135	Q135H
35	Double	Q235	Q235H
40	Single	Q140	Q140H
40	Double	Q240	Q240H
50	Single	Q150	Q150H
50	Double	Q250	Q250H
60	Single	Q160	Q160H
60	Double	Q260	Q260H
70	Single	Q170	Q170H
70	Double	Q270	Q270H
80	Double	Q280	Q280H
90	Double	Q290	Q290H
100	Double	Q2100	Q2100H
125	Double	Q2125	Q2125H



QN2200H



QN2200RH



WBJ2200





Q250

200 amp Frame | Plug-In | 10,000 AIC & 22,000 AIC | Two-Pole, Common Trip


amp	10K AIC Plug-In	22K AIC Plug-In	Handle Location	Wire Range	
				CU	AL
150	QN2150	QN2150H	Left facing	#4-300	#4-300
200	QN2200	QN2200H	Left facing	#4-300	#4-300
150	QN2150R	QN2150RH	Right facing	#4-300	#4-300
200	QN2200R	QN2200RH	Right facing	#4-300	#4-300
150	WBJ2150	—	Centered	#2-300	#2-300
200	WBJ2200	—	Centered	#2-300	#2-300

Notes

- Load connectors supplied with breakers.
- UL Listed for use with 60°C or 75°C wire.
- Wire sizes shown are lug capacity. Consult NEC Article #310 for specific wire sizes.

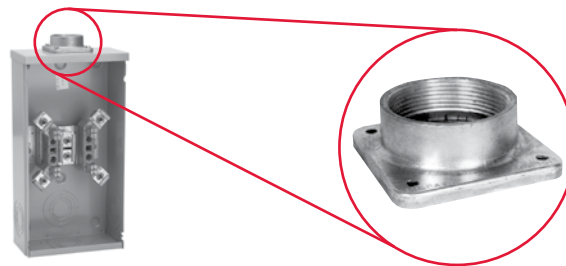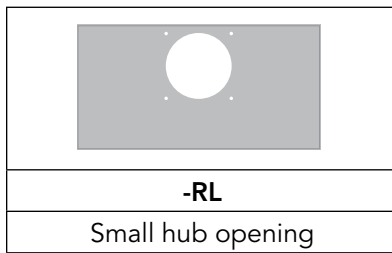

-WL A7514	-YL A7515	-ZL A7516	-DL A7517	-EL A7518	-XL A7551
1" hub	1¼" hub	1½" hub	2" hub	2½" hub	Small closing plate

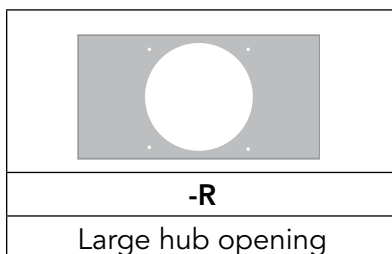

-F A8110	-G A8111	-H A8112	-X A9064	-RRL S8324
3" hub	3½" hub	4" hub	Large closing plate	Large hub opening adapted to small hub opening

Notes



- **Suffix:** Add to catalog number for factory installation of hub.
- **Packaging:** Individually packed units for field installation.
- **Abbreviations:** H.O. (hub opening), C.P. (closing plate).
- Hub Mast rated.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Connector Kits, Closing Kits & Generator Interlock

Connector Kits — For Use with 3/8"-16 Stud Type Units Only

					
Single			Twin		
Suffix	Part #	(3 per set) - 1Ø	Suffix	Part #	(3 per set) - 1Ø
K1	K1539	6-350	K2	K1350	6-350
K3	K1540	4-600 or (2) 1/0-250*	K2L	K1350L	6-350 (non rotating)
K3L	K1540L	4-600 or (2) 1/0-250* (non rotating)	K4	K1541	4-600
Suffix	Part #	(4 per set) - 3Ø	Suffix	Part #	(4 per set) - 3Ø
K5	K3082	6-350	K6	K3442	6-350
K7	K3441	4-600 or (2) 1/0-250*	K8	K3083	4-600

*For (2) 1/0-250, conductors must be of same size.

Bypass Link





K8180 (sold in pairs)

Note

Consult factory for proper connector kits for studded meter sockets.

Closing Covers

	
Meter Closing Plate (Ring Type / Ringless)	Metal Closing Plate (For Ringless Sockets)
6003 - Grey Plastic	CP-21
6116 - Clear Plastic	
6002 - Clear Plastic	

Note

Consult factory for kits that are available.

Disconnect Sleeve



M5-144

Do not use with lever bypass sockets

Isolated Neutral Kit



K1047




Note

Consult factory for correct isolated neutral.


Accessories

Fifth Terminal, Tap Connectors & Block Assemblies


Fifth Terminal

		
5T8K2 - 100-200 amp "Plug-In"	K5T - 200 amp (Block with Square Hole)	K3865 - Heavy Duty Jaw Clamping (K3866 without Neutral Wire)

Tap Connectors (3 per set)

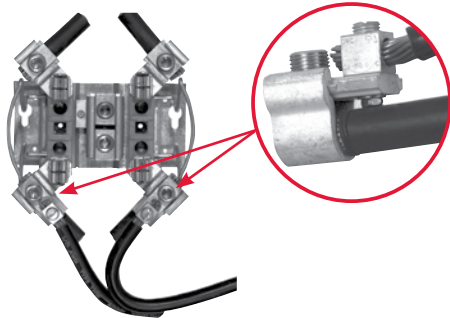	Replaces the load or line side slide-in nut assembly on Milbank 200 amp sockets. Allows for a 100 amp tap location in addition to the #6-350 kcmil load-side connector. K5022 includes safety barrier extensions for applications over 300 VAC. Three lugs per kit.
K4977-INT - Internal Hex	
K4977-EXT - External Hex	
K5022-INT - Internal Hex (set of 4 w/ barrier)	


Triplex Ground


K1190 (For factory installed triplex ground, add suffix -TG to catalog number)

100 amp Blocks *(single sockets only)*


BL7499 - Block Assembly (w/ horn bypass)

200 amp Blocks *(single sockets only)*

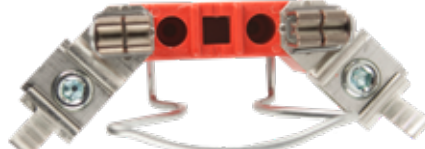
K4529 - Internal Hex Block Assembly (w/ horn bypass)

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Milbank Commercial Pedestals are pad-mounted, weather resistant electrical enclosures consisting of a utility pull section with optional meter socket, and a customer section containing distribution and control equipment. Milbank Commercial Pedestals are an attractive, secure, easy to install and cost-effective solution when underground remote site power distribution and control equipment is required, replacing unsightly and inefficient strut and backboard structures.



Strut and backboard



Commercial pedestal

UL Listed as Industrial Control Equipment (File E113855)

Standard Features

- Type 3R rain-resistant, vandal-resistant cabinet of polyurethane powder coated steel (aluminum or stainless steel also available)
- UL listed as enclosed industrial control equipment (UL508)
- Isolated lockable and sealable utility metering and lug landing sections
- Lockable customer section for distribution and control equipment with internal deadfront
- Print pocket inside customer section door contains wiring schematics and installation instructions
- Most load centers are UL listed for use with various manufacturers' circuit breakers
- All stainless steel external hardware (screws, bolts, hinges, handles, hasps and sealing screws)



Commercial Pedestals

Attractive | Easy to Install | Secure | Cost-Effective

39
COMMERCIAL
PEDESTALS



Applications

These units are ideal for controlling and metering:

- Traffic signals
- Street lighting
- Power distribution for EV charging stations
- Irrigation and sprinkler systems
- Cell towers and telephone vaults
- Pump stations
- Temporary power for fairgrounds, swap meets, outdoor markets, portable offices, holiday lights, etc.
- Outdoor lighting for athletic fields, tennis and basketball courts, parking lots, landscaping and subdivision entrances, etc.

Available Factory-Installed Options


- Meter sockets: ring type or ringless, up to 400 amp
- Main and branch breakers or T fuses
- Distribution: copper load centers and panel boards
- Clocks, timers and relays
- Photoelectric cells and controls
- Power receptacles: pin and sleeve, twist lock or straight blade
- Contactors: definite purpose, electrical or mechanically held, IEC and mercury types
- Surge protection and lightning arrestors
- Reserve inlet generator receptacle with interlocked circuit breakers
- Motor starters and relays
- Push button controls
- Thermostat controls, fans and heating strips
- Power blocks and terminal blocks
- Steel, aluminum and plywood backboards
- Transformers
- Interlock devices for circuit breakers
- Available in steel, aluminum (raw painted or anodized) or stainless steel construction with powder coated finish available in eight standard colors or special-ordered RAL colors
- Available for applications up to 400 amp, 120V, 208V, 240V, 277V, 480V - 1Ø or 3Ø

Accessories



K3865

Fifth terminal kit for use with ringless meter sockets



CP-ABK5/8

Anchor bolt kit (includes four 5/8 - 13 x 18" anchor bolts)



105J

Fifth terminal kit for use with ring-type meter sockets



CP-TC7D


7-day time clock kit

CP-TC24H

24-hour time clock kit

CP-TCWIRE

Male 4-pin connector and wiring harness for use with time clocks other than above



CP-PE-HOA-3POS

HOA switch for field installation



CP-16PDMNT-CALT
16" pedestal mounting base

CP-24PDMNT-CALT
24" pedestal mounting base (includes mounting hardware)

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Commercial Pedestals

Main Load Center Series | Custom Designs Available

CP3B "ML" Series

Main Load Center Series

1Ø3 wire 120/240V or 208Y/120V

Application: remote site service for multiple loads

Milbank Main Load Center Commercial Pedestals are designed to handle the vast majority of all requirements in a standard, stocked configuration.

- All units feature a load center with a plug-on, back-fed main breaker.
- Load center has 16 positions for the 100 amp pedestals and 24 circuits for the 200 amp pedestals.
- Both sizes include sub-feed lugs to allow feeding an external panel.

If your application requires turning loads on based on "dusk-to-dawn" requirements, be sure to see the Milbank Switched Load Center Commercial Pedestal products on the following page.

Features

These units include everything required for remote site service:

- NEMA 3R construction.
- Expandable: load centers allow for future expansion without costly modifications.
- All units feature 200 amp meter socket with optional field-installable fifth terminal kit available.
- 22K amp interrupting capacity (AIC) standard.
- Optional mounting base can be embedded in concrete for fast, easy installation.
- Separate sealable and lockable utility termination section.
- Separate sealable and lockable metering section.
- Separate sealable and lockable customer section with a load center for "always on" loads that include a main circuit breaker, 20 (125 or 200 amp model) or 14 (100 amp model) blank breaker spaces and a circuit directory to document configuration.



Typical Applications

Remote site service for multiple loads.

Standard Pedestals	Optional Fifth Terminal Kit	Main CB		Load Center Circuits	Meter Socket Type
		Amp	Spaces		
CP3B11115A22	105J	100	1,2	16	Ring type with test/bypass blocks
CP3B12119A22	105J	200	1,2,3 4	24	Ring type with test/bypass blocks
CP3B51115A22	K3865	100	1,2	16	Ringless socket with lever bypass
CP3B52119A22	K3865	200	1,2,3,4	24	Ringless socket with lever bypass

Notes

- Chart shows standard, stocked items. Other options and features are available. Contact factory for options, details and availability.
- May require customization based on regional requirements



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Commercial Pedestals

Switched Load Center Series | Custom Designs Available

41
COMMERCIAL
PEDESTALS

CP3B "SL" Series

Switched Load Center Series

1Ø3 wire 120/240V or 208Y/120V

Milbank Switched Load Center Commercial Pedestals are designed not only to provide power for various loads, but also to switch specific loads on and off under certain conditions. A photoelectric cell is used for these controlled loads, and an optional time clock is also available.

Features

These units include everything required for remote site service:

- NEMA 3R construction.
- Expandable: load centers allow for future expansion without costly modifications.
- All units feature 200 amp meter socket with optional field-installable fifth terminal kit available.
- 22K amp interrupting capacity (AIC) standard.
- Optional mounting base can be embedded in concrete for fast, easy installation.
- Separate sealable and lockable utility termination section.
- Separate sealable and lockable metering section.
- Separate sealable and lockable customer section with a control circuit including PE receptacle, Lexan® window, glare shield, Hand-Off-Auto (HOA) switch, contractor controlling a 16-circuit load center for controlled loads, a pre-mounted DIN rail and pre-wired connector to add an optional "plug-and-play" time clock kit for PE on and TC off operation and a circuit directory to document configuration.
- A load center for "always on" loads that includes a main circuit breaker, a control power circuit breaker, a switched load center main breaker, nine (125 or 200 amp model) or 11 (100 amp model) blank breaker spaces and a circuit directory to document configuration.



Typical Applications

Traffic signals, parking lots, highways & athletic field lighting

Standard Pedestals	Optional Fifth Terminal Kit	Main CB		Contactor Amperage	Meter Socket Type
		Amp	Spaces		
CP3B11110A22SL1	105J	100	1,3	60	Ring type with test/bypass blocks
CP3B12110A22SL1	105J	200	1,2,3,4	100	Ring type with test/bypass blocks
CP3B51110A22SL1	K3865	100	1,3	60	Ringless socket with lever bypass
CP3B52110A22SL1	K3865	200	1,2,3,4	100	Ringless socket with lever bypass

Notes

- Chart shows standard, stocked items. Other options and features are available. Contact factory for options, details and availability.
- May require customization based on regional requirements

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Commercial Pedestals

CP3B "400" 400 Amp Series



Milbank 400 Amp Commercial Pedestals are designed to provide a weather and vandal resistant metered enclosure for various loads and distribution. Each pedestal has been designed to handle a wide range of applications using standard, stocked configurations.

- Choice of a single main breaker or twin service disconnect breakers gives flexibility to the pedestal design.
- Optional distribution with feed-through lugs below the service disconnect breakers allows the pedestal to handle numerous applications.
- Typical applications include remote homes where the metering is best located at the curb side or other remote area. The pedestal can also provide power to secondary residence, on-site business, workshop, irrigation, lighting, security or other secondary load.
- Available in custom colors to match home or landscaping.

Features

These units include everything required for remote service:

- Type 3R construction
- Main circuit breaker or dual service disconnects
- Expandable: load center units allow for future expansion without costly modifications
- Optional mounting base can be embedded in concrete for fast, easy installation
- Separate sealable and lockable utility termination section with lug termination
- Separate sealable and lockable metering section
- A separate sealable and lockable customer section with a circuit directory and a print pocket to hold all documentation
- Meter socket options include ring type with bypass studs, ringless with heavy duty lever bypass, or K-Type bolt-on

Typical Applications

Remote site service for residential and commercial job sites

Standard Pedestals	Optional fifth Terminal Kit	Main CB	Load Center Circuits	Meter Socket Type
CP3B1411JB	N/A	320 amp (400 max)	0	Ring-type with test/bypass studs
CP3B14120B	N/A	2-200 amp	(2) 12 circuit ¹	Ring-type with test/bypass studs
CP3B54120B22	K3865	2-200 amp	(2) 12 circuit ¹	Ringless with lever bypass
CP3B5411JB22	K3865	320 amp (400 max)	0	Ringless with lever bypass

Notes

- Chart shows standard, stocked items. Other options and features are available. Contact factory for options, details and availability.
- Stud utility landing is standard. Lug kits are available from factory.
- Units with load centers have (2) #6-250 sub-feed lugs on each load center. (Each load center is 200 amp rated and UL listed with: Siemens, General Electric and Cutler-Hammer plug-in style circuit breakers.)
- May require customization based on regional requirements



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Commercial Pedestals

CP3B "IR" Irrigation Control Series

43
COMMERCIAL
PEDESTALS



Milbank "IR" Series irrigation pedestals install quickly and simply – often in less than an hour with a single technician—a fraction of the time typically needed for strut farm and other installation set ups. Additionally, the pedestal comes pre-wired, so the technician simply drops in the pre-drilled concrete box pad, fastens the pedestal and runs the wires. Prewired landing lugs are provided in a separate utility side so that there is no more need to wrestle with hard-to-bend wires. Simply run the utility wire up and land on the lugs. With both the motor starter and disconnect in the same enclosure, all the controls are housed in a safe, lockable pedestal that protects against vandalism and energy theft.

Features

- 3Ø4W, 480Y/277 volt
- One technician can install in under an hour with use of Milbank's pre-drilled box pad
- All units are UL listed and service entrance rated
- Fused disconnect with accessible handle through the deadfront
- HOA and push button start
- Separate accessible utility side with pre-wired landing lugs
- NEMA rated starters (sizes 1-5)
- Soft start units sizes 30HP-150HP
- 30 amp fuse block for pivot pre-wired in the unit
- White powder coated paint finish helps keep components cooler
 - Options include:
 - Hour meter
 - Chemical injection receptacle
 - Multiple injection receptacle
 - Multiple 30 amp fuse blocks possible

Typical Applications

Power pedestal for irrigation systems or other pump control applications

Standard Pedestals	Exterior Cabinet	NEMA Rating
CP3B0281UMWIR04	White	4
CP3B0281UMWIR03	White	3
CP3B0181UMWIR02	White	2

Notes

- Chart shows standard, stocked items. Other options and features are available. Contact factory for options, details and availability.
- May require customization based on regional requirements

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Commercial Pedestals

CP3B "BBS" Battery Backup Series



Milbank BBS Series Commercial Pedestals are designed to provide battery backup power for various loads, and to switch specific loads on and off under certain conditions; a photoelectric cell or time clock to control lighting circuits, as an example. Metered and unmetered power distribution options are available. The back-up power pedestal is designed to handle the vast majority of today's back-up power requirements. By using 19" rack design, shelves can be adjusted to accommodate the required batteries and manufactures DC to AC inverters, transfer switches and other related equipment. This design gives the user a wide range of design and configuration options. Complete turnkey, ready to power-up pedestals are offered along with basic units ready to accept batteries and inverters supplied by others.

Features

- Type 3R construction
- 100 through 320 amp meter socket with the option of either a ring type socket (conforms to EUSERC 308) with or without test/bypass blocks or a heavy duty ringless socket with lever bypass
- Separate sealable utility termination compartment
- An isolated separate customer section with service disconnects, power distribution options and power control
- 19" wide rack in customer compartment for easy layout of equipment
- Battery trays
- Thermostat with cooling fan
- Filtered louvers for heat rise flow through ventilation
- Three point door latch (key or pad lockable)

Note

- May require customization based on regional requirements

Typical Applications

Metered emergency uninterrupted power for traffic intersections, wireless, phone and communications equipment, parking lots, camera and security locations

Options

- | | | |
|---|--|--|
| <ul style="list-style-type: none"> • Manual bypass switch • Transfer switch for generator power back-up • Generator inlet receptacles 30 amp through 200 amp • Pad lockable provision for receptacles | <ul style="list-style-type: none"> • Police access door • Metered load center distribution • Unmetered load center distribution • Photo electric controls (for street lighting) • Time clocks • HOA switches | <ul style="list-style-type: none"> • Contactors • GFI duplex receptacles • Thermostat for heating control • Heating pads or elements • Roll out shelves for batteries • Surge arrestors and lighting arrestors |
|---|--|--|



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Commercial Pedestals

CP3B "Power Transfer" Series

45
COMMERCIAL
PEDESTALS



Milbank Power Transfer Series Pedestals provide unmetered AC power, distribution, surge suppression, mechanical interlock and stand-by generator receptacle — all in a neat, compact pedestal.

Features

- 120/240V 1Ø3W through 277/480V 3Ø4W ratings
- Metered or unmetered units
- Choice of EUSERC ring type or ringless meter sockets
- 60 amp through 400 amp ratings
- UL listed, Type 3R rated
- Pad lockable, isolated utility compartments
- 20 amp GFI convenience receptacle
- Lockable recessed generator receptacle door
- Utility and generator indicator light options
- All stainless steel hardware
- Galvanized steel, aluminum or stainless steel cabinet options
- Custom designs available

Note

- May require customization based on regional requirements



Typical Applications

Traffic intersections, cell sites, cable TV, pump and lift stations requiring utility power with backup generator power

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Commercial Pedestals

CP3B "CT Metered" Series



Milbank CT Metered Series Commercial Pedestals are designed to be used where a smaller service package would be a better choice over large 3R rated combination switchboards. These pedestals have amperage ratings of 400 to 800 amp at voltages up through 480 volt three phase.

Features

- UL listed, freestanding Type 3R service
- Up to 800 amp
- A low profile CT pedestal
- All utility equipment is isolated in separated pad lockable and sealable compartments
- Separate customer compartment designed to hold distribution and control equipment
- Dead front customer construction
- Optional mounting base
- Optional construction in steel, aluminum and stainless steel.
- Wide choice of powder paint colors

Note

- May require customization based on regional requirements

Typical Applications

Large homes, pumping & lift stations, motor control, water treatment plants, EV charging stations, commercial buildings, large remote service requirements, commercial and industrial control systems



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Commercial Pedestals

CP3A "Slimline" Series

47
COMMERCIAL
PEDESTALS



Milbank Slimline Series Commercial Pedestals provide a sleeker, smaller footprint, with wireway access on the side of the unit rather than the back, allowing maximum flexibility to place the pedestal in tighter spaces.

Features

- UL listed as service equipment
- 100 or 200 amp
- Vandal-resistant, secure and attractive design
- Customer compartment with distribution and control equipment with swing dead front door, secured with both a hasp/latch and draw latch outer door
- Utility metering compartment protected with a hinged hood, increasing resistance to meter vandalism
- Small footprint
- Wireway located on left side of pedestal for utility incoming wire, allowing pedestal to be mounted with back as close as 14" to walls or structures
- Available in 12" and 20" widths and 50" and 63" (metered) and 43" (unmetered) heights
- Includes a print pocket for plans and drawings
- Voltage range: 120V–480V
- Compatible with both ringless and ring type meter sockets, 4–7 terminals
- Available in a wide array of colors, including but not limited too all ANSI powder coated paint colors upon request
- Pedestal mounting base option saves time and labor to install on a cement pad—no anchor bolts required
- Powder coated G90 galvanized steel or Aluminum; raw, anodized or powder coated, as well as stainless steel exterior options

Note

- May require customization based on regional requirements

Typical Applications

Roadway lighting and signage, wastewater treatment facilities, parks and landscaping, and any application where physical space is at a premium



"Slimline" Series Direct Bury Extension

- No need for concrete
- Bolts directly to unit
- Easy, modular design
- Ships in a smaller package
- Increases project flexibility
- Easier to handle and install
- Utilizes stabilizer feet to prevent leaning over time
- Pedestal and extension can be installed within 45 minutes

Notes


- 14 guage steel
- Only available for 12" pedestals

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




Watthour Meter Forms


Standard Forms | Transformer Rated or Self-Contained




2 and 3-WIRE FORMS
1S & 2S




2 and 3-WIRE FORMS
1S & 2S with BYPASS




2-WIRE FORM 3S
5th Term. 9 o'clock




2-WIRE FORM 3S
with BYPASS




2-WIRE FORM 3S
5th Term. 6 o'clock




2-WIRE FORM 3S
with BYPASS




2 ELEMENT
3-WIRE NETWORK
FORM 12S 5th
TERM. 9 o'clock




2 ELEMENT 3-WIRE
NETWORK FORM 12S
with BYPASS 5th
Term. 9 o'clock




2 ELEMENT
3-WIRE NETWORK
FORM 12S 5th
TERM. 6 o'clock




2 ELEMENT 3-WIRE
NETWORK FORM 12S
with BYPASS
5th Term. 6 o'clock




3-WIRE FORM 4S




3-WIRE FORM 4S
WITH BYPASS




2 or 3 ELEMENT
3Ø4W Y or Δ
Y FORM 14S
Δ FORM 15S




2 or 3 ELEMENT
3Ø4W Y or Δ
FORMS 14S & 15S
with BYPASS




2 ELEMENT
3Ø4W Y or Δ
Y FORM 7S
Δ FORM 24S
with BYPASS




2 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 5S




2 ELEMENT 2Ø3W,
2Ø4W, 3Ø3W
FORM 5S with
BYP



2 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 13S




2 or 3 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 13S with
BYPASS




2 or 3 ELEMENT
3Ø4W Y or Δ
Y FORM 9S
Δ FORM 8S


TR = TRANSFORMER RATED
SC = SELF CONTAINED



2 or 3 ELEMENT
3Ø4W Y or Δ
FORMS 8S & 9S
with BYPASS



2 ELEMENT
3Ø4W Y
FORM 6S



2 ELEMENT
3Ø4W Y
FORM 6S
with BYPASS

Meter Forms

Reference Information

49
METER
FORMS

DIAGRAM A
1Ø2W with 1 P.T. & 1 C.T.
Single Stator Meter (2W1Ø) - Form 3S
5T Socket, Test Switch #TS04-0101

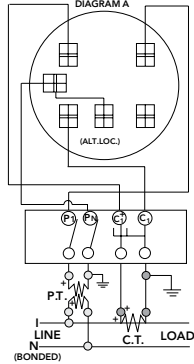


DIAGRAM B
1Ø3W with 1 C.T.
Single Stator Meter (2W1Ø) - Form 3S
5T Socket, Test Switch #TS04-0101

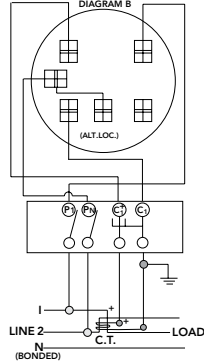


DIAGRAM C
1Ø3W with 2 C.T.'s
Single Stator Meter (3W1Ø) - Form 4S
6T Socket, Test Switch #TS07-0105

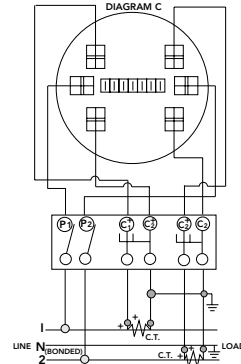


DIAGRAM D
1Ø3W or 3W Network with 2 C.T.'s
2 Stator Meter - Form 5S
8T Socket, Test Switch #TS07-0105

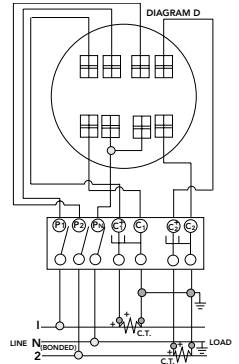


DIAGRAM E
3Ø3W "A" with 2 P.T.'s & 2 C.T.'s
2 Stator Meter - Form 5S
8T Socket, Test Switch #TS07-0105

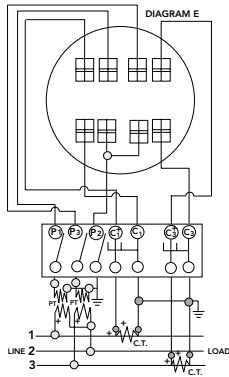


DIAGRAM F
3Ø3W "A" with 2 C.T.'s
2 Stator Meter - Form 5S
8T Socket, Test Switch #TS07-0105

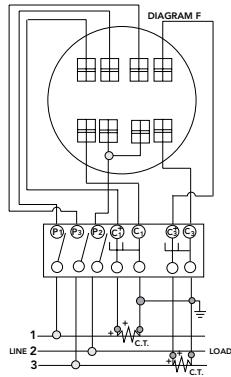


DIAGRAM G
3Ø4W "Y" with 3 C.T.'s
2 ½ Stator Meter - Form 6S
13T Socket, Test Switch #TS10-0109

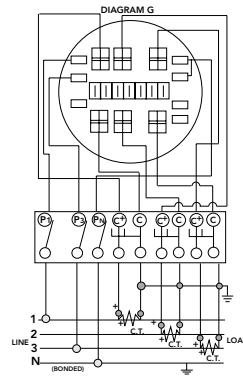


DIAGRAM H
3Ø4W "Y" with 2 P.T.'s & 3 C.T.'s
2 ½ Stator Meter - Form 6S
13T Socket, Test Switch #TS10-0109

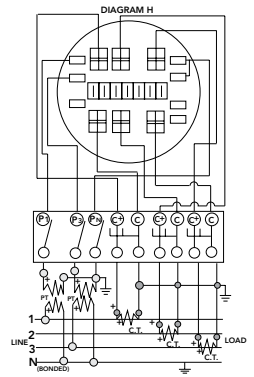


DIAGRAM I
3Ø4W "Y" or "A" with 3 C.T.'s
"Y" 3 Stator Meter - Form 9S
"A" 2 Stator Meter - Form 8S
13T Socket, Test Switch #TS10-0109


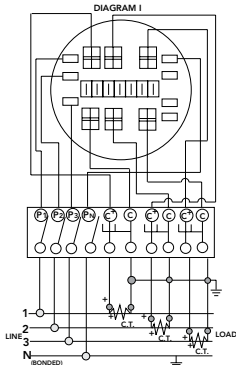


DIAGRAM J
3Ø4W "Y" with 3 P.T.'s & 3 C.T.'s
3 Stator Meter - Form 9S
13T Socket, Test Switch #TS10-0109



Prewiring: If standard factory prewiring is required, refer to wiring diagrams on this page. Determine appropriate diagram and send a copy with order. If custom factory prewiring is required, specify on order. Be sure to include meter socket catalog number, test switch make and catalog number, meter form number and provide a copy of your wiring diagram.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

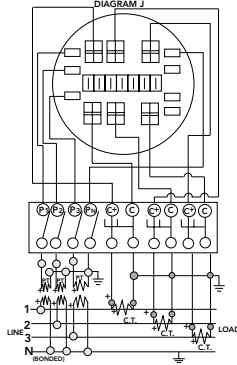

Conduit, Ampacity & SCCR

Reference Information

MAXIMUM NUMBER OF CONDUCTORS IN CONDUIT

Table from 2008 NEC Code Reference: Rigid Metal Conduit

Type	Conductor Size (AWG/kcmil)	Conduit Trade Sizes (Inches)									
		1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4
THHN, THWN, THWN-2	12	9	16	26	46	62	102	146	225	301	387
	10	6	10	17	29	39	64	92	142	189	244
	8	3	6	9	16	22	37	53	82	109	140
	6	2	4	4	12	16	27	38	59	79	101
	4	1	2	4	7	10	16	23	36	48	62
	3	1	1	3	6	8	14	20	31	41	53
	2	1	1	3	5	7	11	19	26	34	44
	1	1	1	1	4	5	8	12	19	25	35
	1/0	1	1	1	3	4	7	10	16	21	27
	2/0	0	1	1	2	3	6	8	13	18	23
XHH, XHHW, XHHW-2	3/0	0	1	1	1	3	5	7	11	15	19
	4/0	0	1	1	1	2	4	6	9	12	16
	4	1	2	4	7	10	16	24	37	49	63
	2	1	1	3	5	7	12	17	26	35	45
	1/0	1	1	1	3	4	7	10	16	22	28
	2/0	0	1	1	2	3	6	9	13	18	23
	4/0	0	1	1	1	2	4	6	9	12	16
	250	0	0	1	1	1	3	5	7	10	13
	350	0	0	1	1	1	2	3	6	7	10
	500	0	0	0	1	1	1	2	4	5	7
	750	0	0	0	0	1	1	1	3	4	5

This table is for concentric stranded conductors only. For cables with compact conductors refer to NEC. Refer to latest NEC Code or Local Codes for updated requirements.

* ALLOWABLE AMPACITIES OF INSULATED COPPER & ** ALUMINUM CONDUCTORS (3W IN CONDUIT) 75°C (167°F)

*CU		AL or **Cu-Clad AL	
A	B	A	C
18	—	—	—
16	—	—	—
14	20†	—	—
12	25†	12	20†
10	35†	10	30†
8	50	8	40
6	65	6	50
4	85	4	65
3	100	3	75
2	115	2	90
1	130	1	100
1/0	150	1/0	120
2/0	175	2/0	135
3/0	200	3/0	155
4/0	230	4/0	180
250	255	250	205
300	285	300	230
350	310	350	250
400	335	400	270
500	380	500	310
600	420	600	340
700	460	700	375
750	475	750	385

A = Size: AWG/MCM
 *B = Ampere Rating for
 Insulation Types:
**FEPW, RH, RHW, THW,
 THWN, XHHW, USE, 2W.**
 **C = Ampere Rating for
 Insulation Types:
**RH, RHW, THW, THWN,
 XHHW, USE**
 (Per NEC table 310-16)

AMPACITY CORRECTION FACTORS

AMBIENT TEMP.C°	CORRECTION FACTOR	AMBIENT TEMP.F°
21 - 25	1.05	70 - 77
26 - 30	1.00	78 - 86
31 - 35	.94	87 - 95
36 - 40	.88	96 - 104
41 - 45	.82	105 - 113
46 - 50	.75	114 - 122
51 - 55	.67	123 - 131
56 - 60	.58	132 - 140
61 - 65	.53	141 - 158

Overall ampere ratings of U/L listed Milbank multiple position meter sockets are based on **2008 N.E.C. Handbook Article 220-84** and **ANSI / UL-414** (except where restricted by line connector size.) These requirements provide for a diversity factor / demand factor being utilized in determining the overall (main bus / lug) rating of a gang socket. All Milbank U/L listed gang sockets meet or exceed these diversity factor/demand factor requirements. Standard overall ampacity ratings for U/L listed and non U/L listed gang sockets are as shown in the chart below. Ampere ratings of meter sockets are based on the meter socket being wired with 75° C insulated wire conductor, sized in accordance with **Table 310-16** of the **National Electric Code**.

GANG SOCKET OVERALL AMPACITIES

NO. OF METER POSITIONS	100A / POS. AMPACITY	125A / POS. AMPACITY	150A / POS. AMPACITY	200A / POS. AMPACITY
2	200A	200A	200A	200A #
3	200A	225A	225A	270A
4	200A	250A	270A	360A
5	225A	285A	338A	450A
6	270A	330A	396A	528A

† Unless otherwise permitted elsewhere in the Code, the overcurrent protection for conductor types marked with an obelisk (†) shall not exceed 15 amps for 14 AWG, 20 amps for 12 AWG, and 30 amps for 10 AWG copper; or 15 amps for 12 AWG and 25 amps for 10 AWG aluminum and copper-clad aluminum after any correction factors for ambient temperature and number of conductors have been applied.
 # Some constructions are rated at 400 amps overall. Contact your sales representative for more information. Refer to latest NEC Code or Local Codes for updated requirements.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Energization of Electrical Equipment

Important Information for Installers

Important Note

In addition to national and local electrical codes, many utilities have specific requirements for metering equipment. Always consult the serving utility for their specifications and requirements prior to ordering or installing Milbank meter mounting equipment.

Before Energizing

1. Give equipment a thorough visual examination to determine that:
 - A. No shipping or installation damage exists.
 - B. Proper clearances have been maintained.
 - C. All connections have been made.
 - D. Equipment is clean and dry.
2. Make a thorough examination to:
 - A. Verify tightness of all bolted connections (see table below).
 - B. Manually operate all circuit breakers, switches, relays, etc.
 - C. Check rigidity of all mountings, bus bars and components.
 - D. Use test equipment to check continuity of circuitry and integrity of insulation.
3. All switches and circuit breakers should be in the "off" position.
4. Verify that manual meter bypass (if applicable) is in non-bypass position.
5. Install cover and/or close doors.
6. If installation is not being energized at this time, follow "after-energizing" steps listed below. These steps will secure the installation in case of accidental energization.

When Energizing

Use caution and follow established safety procedures:

- 1) Wear safety apparel.
- 2) Use safety equipment.
- 3) Take action to prevent injury to yourself and others in the event of failure of the installation.
- 4) Take action to prevent/decrease damage to property in the event of failure of the installation.
- 5) If you are unsure how to safely energize the installation, get someone who is knowledgeable to do it.

After Energizing

Secure the installation:

- 1) To prevent accidental contact with energized parts, cover all openings with approved filler devices.
- 2) To prevent unauthorized access, secure all covers and/or doors with approved security devices.
- 3) Attach/post information to advise others of potential hazards associated with the installation.

Recommended Torque for General Applications*

Nominal Size	Joint Description		Head Type	Torque (Inch Lbs.)
	Screw	Nut		
10	Brass	Brass Nut or Extruded Hole	All	20-25 inch lbs.
10	Steel	Copper or Aluminum Busbar $\leq 1/8"$	All	25-30 inch lbs.
10	Steel	Steel Nut or Extruded Hole; CU or AL Busbar $> 1/8"$	All	30-35 inch lbs.
12	Steel	Aluminum Extruded Hole	All	30-35 inch lbs.
12	Steel	Steel Nut or Extruded Hole	All	40-50 inch lbs.
1/4	Steel	Aluminum Extruded Hole	All	40-50 inch lbs.
1/4	Steel	Steel Nut or Extruded Hole; CU or AL Busbar	All	50-60 inch lbs.
5/16	Steel	Aluminum Extruded Hole	Hex	60-70 inch lbs.
5/16	Steel	Steel Nut or Extruded Hole; CU or AL Busbar	Hex	100-150 inch lbs.
3/8	Steel	Steel Nut	Hex	150-200 inch lbs.
1/2	Steel	Steel Nut	Hex	200-250 inch lbs.

* Interior labels typically indicate the required torque for wire connectors and studs, and should be referenced first.
CU: Copper
AL: Aluminum

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Materials

Steel Quality

The meter equipment listed in this catalog is made of galvanized steel (AISI* G90) to afford the best possible weather proofing.
*American Iron and Steel Institute.

Steel Sheet

16 gauge, galvanized, sheet: 1 1/4 oz./ sq.ft. class zinc-coated. (AISI G90)
14 gauge, galvanized, sheet: 1 1/4 oz./ sq.ft. class zinc-coated.

Aluminum Extrusion

Wire-Terminal: Alloy; 6061-T6, Tin-plated for CU/AL wire.
Bus Bar: Alloy; 6101-O & 6063-O

Aluminum Sheet

3000 series aluminum sheet, H14, or 5052 series aluminum sheet, H32. Where applicable thicknesses range from .064-.125.

Copper Sheet & Bus

Electrolytic copper with tin plating in most applications.

Insulating Materials

- In most units, support bases for current-carrying components are molded from fiberglass reinforced high-strength, track resistant, thermoset polyester molding compounds.
- Clear or black safety shields and polarity barriers are molded from high-strength, track resistant, polycarbonate molding compounds.
- Various sheet insulating materials, as appropriate for the application are utilized in the fabrication of flat, formed and punched component parts and barriers.

Finish

Process

Light gray state-of-the-art electrostatically applied powder paint offers a durable, non-fading finish. For further information concerning the chemical analysis of the weather resistant finish, please contact the factory.

Metal Fastners

Zinc-coated with a chromate dip.

Ratings & Compliance

Ratings & Compliance

All Milbank electrical enclosures in this catalog are rated "Type 3R Enclosure" unless specified otherwise on the product's page. All enclosures with a UL designation are constructed per the appropriate UL Standard and may be installed per the National Electric Code. UL procedure files associated with the UL Standards are listed as follows: Meter Sockets (UL 414, File E30202), Test Switches (UL 414, File E62531), Power Outlets (UL 231, File E90945), Panelboards (UL 67, File E32628) and Pullout Switches (UL 1429, File E133062). Additional standards are utilized as applicable: Meter Sockets (ANSI C12.7), Test Switches (ANSI C12.9) and Panelboards (NEMA PB-1).



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

6002.....	39	M5-144.....	39	QN2200H.....	37
6003.....	39	Q115.....	37	QN2200R.....	37
6116.....	39	Q115H.....	37	QN2200RH.....	37
182410-CTC1-SP.....	32	Q120.....	37	S8324.....	38
243210-CTC1-SP.....	32	Q120H.....	37	U1079-RRL-K3-BLG.....	13
281815-CT3R-SP.....	32	Q125.....	37	U1252-RRL-KK-K1-BLG-SLVG.....	27
303515-CT3R-SP.....	32	Q125H.....	37	U1252-X-KK-K3-BL.....	25
323210-CTC1-SP.....	32	Q130.....	37	U1252-X-KK-K3-BLG.....	25
324210-CTC1-SP.....	32	Q130H.....	37	U1252-X-KK-K3-DLC.....	27
324215-CT3R-SP.....	32	Q135.....	37	U1252-X-KK-K3-DPL.....	25
363612-LC3R-SP-WB.....	32	Q135H.....	37	U1253-RRL-KK-K1-BLG-SLVG.....	27
403515-CT3R-SP.....	32	Q140.....	37	U1253-X-KK-K3-BL.....	25
425412-CTC1-SP.....	32	Q140H.....	37	U1253-X-KK-K3-BLG.....	25
484812-CT3R-SP.....	32	Q150.....	37	U1253-X-KK-K3-DLC.....	27
484812-CT3R-WB.....	32	Q150H.....	37	U1254-RXL-KK-K1-BLG-SLVG.....	27
544215-CT3R-SP.....	32	Q160.....	37	U1254-X-KK-K3-BL.....	25
5T8K2.....	40	Q160H.....	37	U1254-X-KK-K3-BLG.....	25
606015-CT3R-WB.....	32	Q170.....	37	U1254-X-KK-K3-DLC.....	27
A7514.....	38	Q170H.....	37	U1254-X-KK-K3-DPL.....	25
A7515.....	38	Q2100.....	37	U1255 X-KK-K3-DLC.....	27
A7516.....	38	Q2100H.....	37	U1255-RXL-KK-K1-BLG-SLVG.....	27
A7517.....	38	Q2125.....	37	U1255-X-KK-K3-BL.....	25
A7518.....	38	Q2125H.....	37	U1255-X-KK-K3-BLG.....	25
A7551.....	38	Q215.....	37	U1256-RXL-KK-K1-BLG-SLVG.....	27
A8110.....	38	Q215H.....	37	U1256-X-KK-K3-BL.....	25
A8111.....	38	Q220.....	37	U1256-X-KK-K3-BLG.....	25
A8112.....	38	Q220H.....	37	U1256-X-KK-K3-DLC.....	27
A9064.....	38	Q225.....	37	U1256-X-KK-K4-DPL.....	25
BL7499.....	40	Q225H.....	37	U1282-XL-KK-BLG.....	21
CE136-CECHA.....	31	Q230.....	37	U1283-XL-KK-BLG.....	21
CP-21.....	39	Q230H.....	37	U1729-X-DPL.....	13
K1047.....	39	Q235.....	37	U1779-R-K3-BLG.....	13
K1190.....	40	Q235H.....	37	U1797-O-K3L-K2L-BLG.....	13
K1350.....	39	Q240.....	37	U1980-O-KK-BL.....	11
K1350L.....	39	Q240H.....	37	U1980-O-KK-BLG.....	11
K1539.....	39	Q250.....	37	U1980-O-KK-DPL.....	11
K1540.....	39	Q250H.....	37	U2692-XL-KK-BL.....	23
K1540L.....	39	Q260.....	37	U2693-XL-KK-BL.....	23
K1541.....	39	Q260H.....	37	U2862-X-2/200-KK-K1-DPL.....	28
K3082.....	39	Q270.....	37	U2863-X-3/200-KK-K1-DPL.....	28
K3083.....	39	Q270H.....	37	U3000-O-2/K3L-BL.....	13
K3441.....	39	Q280.....	37	U3126-O-KK-BLG.....	11
K3442.....	39	Q280H.....	37	U3126-O-KK-DLC.....	11
K3865.....	40	Q290.....	37	U3786-O-BLG.....	12
K3866.....	40	Q290H.....	37	U3802.....	6
K4529.....	40	QN2150.....	37	U3812.....	6
K4977-EXT.....	40	QN2150H.....	37	U3822-20GWR.....	7
K4977-INT.....	40	QN2150R.....	37	U3832.....	6
K5022-INT.....	40	QN2150RH.....	37	U3862.....	6
K5T.....	40	QN2200.....	37	U3939-X.....	13

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




U4029-X-DPL.....	12	U5990-O.....	32	UQFBH-200.....	36
U4168-X-K7-BLG.....	14	U7021-RL-KK-BL.....	10	UQFBH-M-100.....	36
U4367-XPB-BLG.....	14	U7021-RL-KK-DLC.....	10	UQFBH-M-125.....	36
U4413-O-KK-BL.....	11	U7021-RL-TG-KK-BLG.....	10	UQFBH-M-150.....	36
U4413-O-KK-BLG.....	11	U7040-RL-KK-DPL.....	10	UQFBH-M-175.....	36
U4664-X-8522-DPL.....	15	U7040-RL-TG-KK-BLG.....	10	UQFBH-M-200.....	36
U4667-X-8043-DPL.....	15	U7274-YL-KK.....	9	UQFP-100.....	36
U4667-X-8527-DPL.....	15	U7421-RRL.....	12	UQFP-125.....	36
U4701-XL-BLG.....	12	U7423-RXL.....	12	UQFP-150.....	36
U4881-O.....	8	U7487-RL-KK-BL.....	9	UQFP-175.....	36
U4881-O-50GB.....	8	U7487-RL-TG-KK-BLG.....	9	UQFP-200.....	36
U4881-O-60GB.....	8	U7487-YL-TG-KK-BLG.....	9	UQFPH-100.....	36
U4905-X-BLG.....	13	U8032-XL-KK-BL.....	21	UQFPH-125.....	36
U4912-X-K3-BLG.....	13	U8032-XL-KK-BLG.....	21	UQFPH-150.....	36
U5136-O-200S.....	34	U8033-XL-KK-BL.....	21	UQFPH-175.....	36
U5168-XTL-100-KK-BL.....	18	U8033-XL-KK-BLG.....	21	UQFPH-200.....	36
U5168-XTL-100-KK-BLG.....	18	U8034-XL-KK-BL.....	21	UQFPH-M-100.....	36
U5168-XTL-200-KK-BL.....	18	U8034-XL-KK-BLG.....	21	UQFPH-M-125.....	36
U5168-XTL-200-KK-BLG.....	18	U8035-XL-KK-BL.....	21	UQFPH-M-150.....	36
U5268-XTL-200-KK-BLG.....	18	U8035-XL-KK-BLG.....	21	UQFPH-M-175.....	36
U5767-X-200-CB.....	19	U8036-XL-KK-BL.....	21	UQFPH-M-200.....	36
U5787-O-200-CB.....	19	U8036-XL-KK-BLG.....	21	UQFP-M-100.....	36
U5882-X-2/200-KK-K3-DPL.....	29	U8173-XL-KK-BLG.....	10	UQFP-M-125.....	36
U5882-X-KK-BL.....	29	U8212-XL-KK-BLG.....	20	UQFP-M-150.....	36
U5882-X-KK-BLG.....	29	U8213-XL-KK-BLG.....	20	UQFP-M-175.....	36
U5883-X-KK-BL.....	29	U8214-XL-KK-BLG.....	20	UQFP-M-200.....	36
U5883-X-KK-BLG.....	29	U8215-XL-KK-BLG.....	20	USE-22-200-MB.....	17
U5884-X-4/200-KK-K3-DPL.....	29	U8216-XL-KK-BLG.....	20	WBJ2150.....	37
U5884-X-KK-BL.....	29	U8569-YL-KK-BLG.....	9	WBJ2200.....	37
U5884-X-KK-BLG.....	29	U9312-XL-KK-DLC.....	24	Z703916-AC.....	16
U5885-X-KK-BL.....	29	U9313-XL-KK-DLC.....	24	Z703917-AC.....	16
U5885-X-KK-BLG.....	29	U9314-XL-KK-DLC.....	24	Z703918-AC.....	16
U5886-X-6/200-KK-K3-DPL.....	29	U9551-R-5T9.....	12	Z703919-AC.....	16
U5886-X-KK-BL.....	29	U9551-X-DPL.....	12	Z703921-AC.....	16
U5886-X-KK-BLG.....	29	U9700-RRL-BLG.....	12	Z704693-AC.....	16
U5897-RL-150-KK-DPL.....	18	U9701-RRL-BLG.....	12	Z704694-AC.....	16
U5897-RL-200-KK-DPL.....	18	UQFB-100.....	36	Z705420-AC.....	16
U5898-O-100-KK-BL.....	18	UQFB-100-X1.....	36	Z705456-AC.....	16
U5898-O-200-KK-BLG.....	18	UQFB-125.....	36	Z708145-AC.....	16
U5902-X-KK-BL.....	29	UQFB-125-X1.....	36		
U5902-X-KK-BLG.....	29	UQFB-150.....	36		
U5903-X-KK-BL.....	29	UQFB-150-X1.....	36		
U5903-X-KK-BLG.....	29	UQFB-175.....	36		
U5904-X-KK-BL.....	29	UQFB-175-X1.....	36		
U5904-X-KK-BLG.....	29	UQFB-200.....	36		
U5905-X-KK-BL.....	29	UQFB-200-X1.....	36		
U5905-X-KK-BLG.....	29	UQFBH-100.....	36		
U5906-X-KK-BL.....	29	UQFBH-125.....	36		
U5906-X-KK-BLG.....	29	UQFBH-150.....	36		
U5971-XL-200.....	17	UQFBH-175.....	36		



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



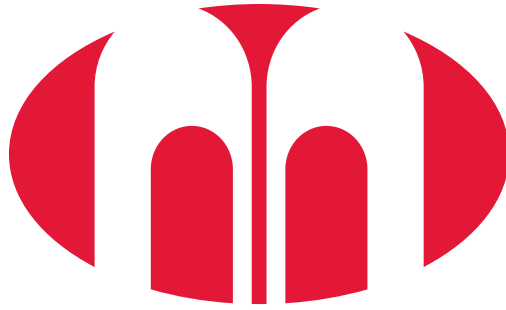

MILBANK[®]
ENERGY AT WORK

