


Milbank Meter Socket / CB Combo

UAP5024-XL Features:

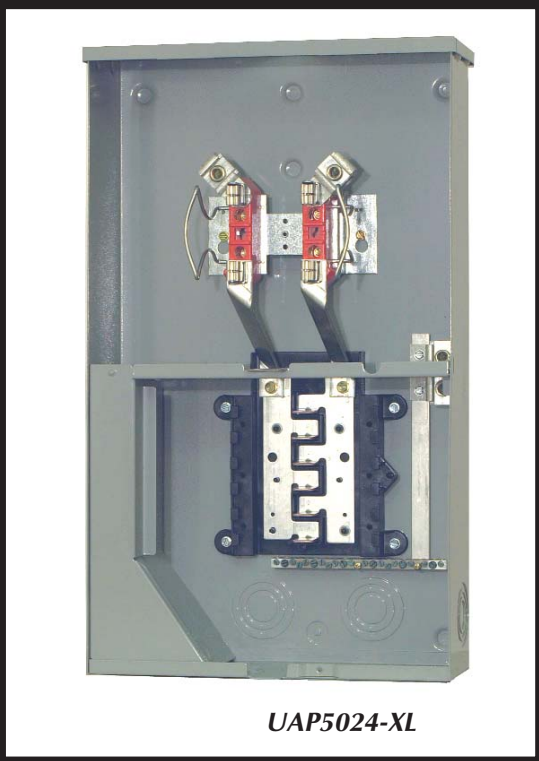

UAP5024-XL

- 200 amp, 120/240 volt, 10K AIC rated, UL Listed
- Ringless 4 terminal socket
- Lightweight aluminum 3R enclosure and covers with polyester powder coat finish
- Utility and customer covers are removable for ease of installation; lockable and sealable for security
- Universal load center accepts various manufacturers' plug-in type circuit breakers—up to six (6) double poles. See chart below.
- Overhead or underground service feed
- Underground feed has 3" KO and removable wireway cover for ease of installation
- Convenient knockout locations for load exits
- Accepts field-installable fifth terminal (K5T)



4 TERMINAL—RINGLESS—METER SOCKET / CB COMBO—ALUMINUM CONSTRUCTION


AMPS	SERVICE	CATALOG NUMBER	HUB	CONNECTORS	BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S							
				CU/AL		D"	W"	H"	1	2	3	4	5	6	7	
200	OH/UG	UAP5024-XL	C.P.	#6-350 kcmil	NONE	4 1/2	14 1/8	24	2	2	3	2 1/2	1 1/2	3/4	1 1/4	1/2

HUBS: Supplied with standard hub opening in top with closing plate

BUSSING: Load side bus bars and circuit breaker interior are made from plated copper


WIREWAY: Provided with underground pull section wireway with removable cover

BREAKERS: Breaker section has provision for six double pole "plug-in" type circuit breakers. All circuit breakers will be parallel. To comply with NEC wire bending space requirements, the maximum single breaker amperage is 200 amps restricted to 3/0 copper conductor.

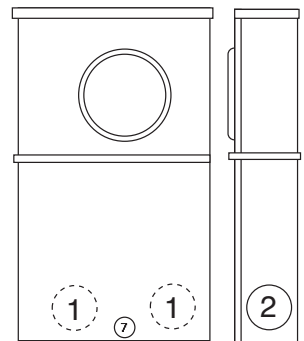

PLUG-IN BREAKER COMPATIBILITY CHART

AMPS	CUTLER-HAMMER (WESTINGHOUSE)	SIEMENS	G.E.	SQ-D
≤ 100	QUICKLAG P / BR / HQP / QPGF	QP	TQL / THQL / THQL-GF	HOMELINE
≤ 200		QN / QNR		



816-483-5314 phone

816-483-6357 fax

www.milbankmfg.com

5024 7/06

