

Milbank Meter Sockets


320 Amp Ring Type Meter Socket

PacifiCorp Approved



U5056-O

- 320 amp continuous / 400 amp maximum rating
- 4-terminal, 1Ø, 3W
- Type 3R construction
- Manual bypass facilities
- Line side: 1/2-13 NC studs for Utility furnished connectors
- Load side: Factory installed #4-600 kcmil connectors

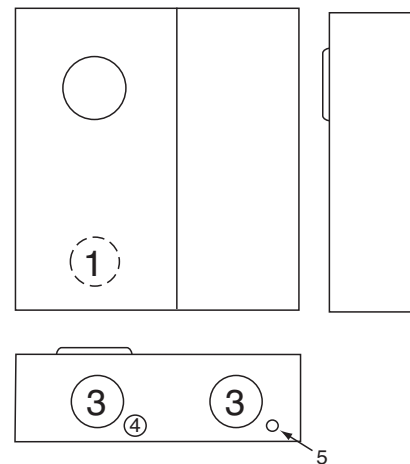

320 AMP METER SOCKET – 1Ø3W – RING TYPE – 600 VAC

CATALOG NUMBER	SERVICE	HUB	CONNECTORS CU/AL		BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S				
			LINE	LOAD		D"	W"	H"	1	2	3	4	5
U5056-O	UG	NONE	1/2-13 NC STUDS	#4-600 kcmil or twin 1/0-250 kcmil	LINK TYPE	6	24	32	3	—	4	1/4, 1/2	1/4

LOAD SIDE CONNECTORS: Factory installed anti-rotation connectors accommodate #4-600 kcmil single or twin 1/0-250 kcmil conductors.

SCREW-TYPE SEALING RING: Included with socket.

816.483.5314 phone

816.483.6357 fax

www.milbankmfg.com

5056 12/04

