


Meter-Breaker Combination

200 amp Side Wireway


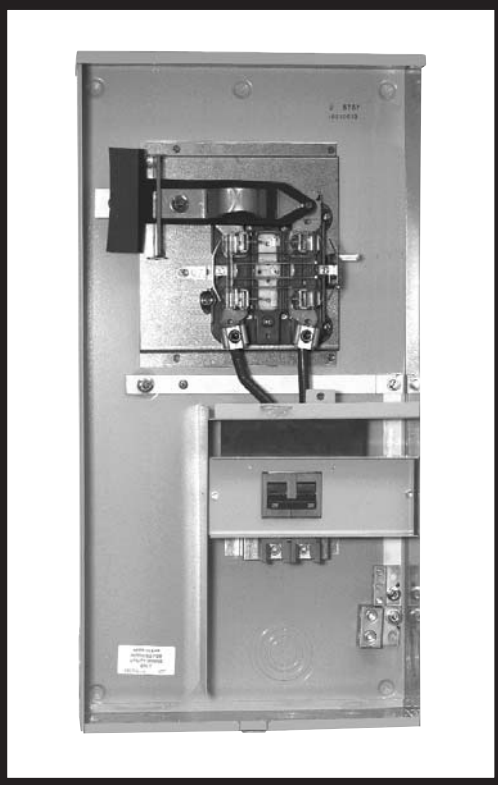


U5757-O-200 features:

- 200 amp meter socket
- Side wireway design
- Ringless cover
- 4 terminal, 1Ø3W
- Non-bypass
- Underground service
- Milbank reliability
- **FIELD INSTALLED ANTI-ROTATION LUGS AVAILABLE:**
 - Line side – single barrel up to 600 kcmil (order K1540L)
 - Line side – double barrel up to 350 kcmil (order as K1350L)
- **MORE WIRING ROOM...designed to handle 500 kcmil conductors with 4" KO in bottom**
- **Factory installed Milbank 200 amp breaker**

200 AMP-4 TERMINAL-RINGLESS-1Ø3W-120/240 VAC

SERVICE	CATALOG NUMBER	CONNECTORS CU/AL		BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S					
		LINE	LOAD		D"	W"	H"	1	2	3	4	5	6
UG	U5757-O-200	3/8-16 stud	1/0-300 kcmil	NONE	5 ³ / ₄	17 ³ / ₈	34	3	3	4	3	1/4	1

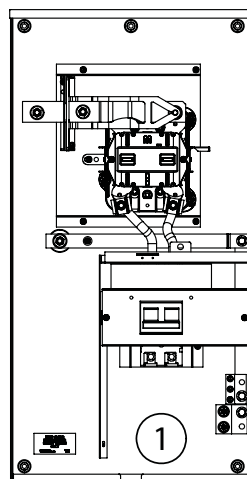

CONNECTORS: For field installed line side connector kits, order as extra **K1540L** (600 kcmil). For twin lug connectors, order as extra **K1350L** (350 kcmil).

FIFTH TERMINAL: Available with factory installed fifth terminal in 6 o'clock position (add **-5T6**) or 9 o'clock position (add **-5T9**). For field installed fifth terminal, order catalog # **K3865**.



816-483-5314 phone

816-483-6357 fax

www.milbankmfg.com

5757 01/06