




MILBANK[®]
ENERGY AT WORK

UAP8435-XL-TG-HSP

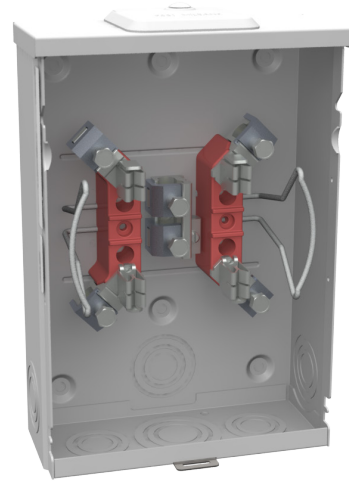

Catalog Number	UAP8435-XL-TG-HSP	Mounting	Surface Mount
Marketing Product Description	4 Terminal Ringless Small Closing Plate Triplex Ground Stainless Steel Hasp Aluminum Painted External Hex	Enclosure	Aluminum with Powder Coat Finish
UPC	784572300798	Jaw Quantity	4 Terminal
Length (IN)	3.313	Bypass Type	No Bypass
Width (IN)	8	Number of Meter Positions	1 Position
Height (IN)	11.5	Equipment Ground	Triplex Ground
Brand Name	Milbank	Hub Opening	Small Closing Plate
Type	Ringless Meter Socket	Line Side Wire Range	6 - 2/0 AWG
Application	Meter Socket	Load Side Wire Range	6 - 2/0 AWG
Standard	UL Listed;Type 3R	Number Of Receptacles	0
Voltage Rating	600 Volts Alternating Current		
Amperage Rating	125 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	3.313L x 8W x 11.5H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Overhead or Underground		
Terminal	Lay in		
Insulation	Glass Polyester		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.