



Milbank 2-200 Amp Breaker Enclosure

U6064 Series



U6064-XTL-200-200

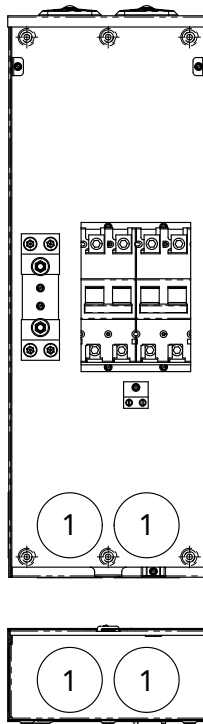

6064



U6064-XTL-200-200

Specifications

- 120/240V, 1Ø applications
- UL Listed
- Available for two UQFB style breakers in any combo of 100, 150, 200 amps
- 10K AIC rated
- Removable front cover and deadfront
- Type 3R 16 gauge shell constructed of G90 galvanized steel
- Light gray polyester powder coat finish

Breaker Enclosures | 120/240V | 1Ø

Catalog Number	Service	Hub	Dimensions			Knockouts
			D"	W"	H"	1
U6064-XTL-100-100	OH	(2) C.P.	4 ²⁷ / ₃₂	11	31	3
U6064-XTL-150-150	OH	(2) C.P.	4 ²⁷ / ₃₂	11	31	3
U6064-XTL-200-200	OH	(2) C.P.	4 ²⁷ / ₃₂	11	31	3

Circuit Breakers

10K AIC Bolt-On	Amps	Wire Range	
		CU	AL
UQFB-100	100	#3-#1	#1-1/0
UQFB-150	150	1/0-300	2/0-300
UQFB-200	200	1/0-300	2/0-300

Notes

- **Application:** To be used in conjunction with 320 amp, single phase meter sockets, or when the utility requires a separate enclosure for the meter socket and main breaker.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

