

MILBANK[®]
ENERGY AT WORK



EVERGY SERVICE AREA

Meter Mounting Equipment



Meter mounting
equipment approved
for use within the Evergy
utility service area.

Milbank designs and manufactures electrical solutions that move and manage power for the residential, commercial, industrial, utility and transportation sectors. With nearly a century of expertise in electrical engineering design and manufacturing, Milbank's portfolio includes metering equipment, enclosures and power distribution and controls equipment. Founded in 1927, Milbank is a family-owned, American manufacturer headquartered in Kansas City, Mo. For more information, please visit milbankworks.com.



Metering

Milbank has been a market leader in electrical metering equipment, setting the standard in quality, for 95 years and counting. There are hundreds of available configurations, including a range of sizes as well as various knockout, terminals and bypass options. Products also have a variety of selections for hubs, locks and connectors. Milbank has the socket you need with thousands of active products to meet your utility's requirements.



Enclosures

Milbank's line of enclosures includes commercial junction boxes, panel mount enclosures, transformer cabinets, wireways and troughs. Enclosures are designed to meet or exceed industry standards. Each one is constructed with high-quality materials and built with superior craftsmanship. Each unit is engineered to protect controls and equipment from dust, dirt and other harmful elements, based on various NEMA ratings.



Power Distribution & Controls

Milbank doesn't just build empty enclosures. We design and deliver complete power distribution solutions. Our custom power distribution and control equipment is engineered and built to your exact specifications. Milbank systems are an attractive, secure, easy-to-install, and cost-effective option. These units can replace unsightly or insufficient strut and backboard structures when underground remote site power distribution and control equipment is required.



Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Air Conditioner & Hot Tub Disconnects

30-60 Amps AC Disconnects	6
60 Amps AC Disconnect with 20 Amps GFCI Receptacle	7
Hot Tub Disconnects	8

Single Position Sockets

100 Amps, 4 Terminals, Ringless, Solar Sockets	9
100-200 Amps, 5 Terminals, Ringless	10
200 Amps, 5-7 Terminals, Lever Bypass, Ringless	11
320 Amps, 5-7 Terminals, Lever Bypass, Ringless.....	12

Meter Mains

200 Amps, 5 Terminals, Lever Bypass, Ringless	13
150-200 Amps, 7 Terminals, Lever Bypass, Ringless	14

Meter Mains with Lever Bypass

320 Amps, 4-7 Terminals, Lever Bypass, Ringless	15
320 Amps, 5 Terminals, Lever Bypass, Ringless.....	16
400 Amps, 7 Terminals, Lever Bypass, Ringless	17

Meter Mains with Load Center

100-200 Amps, 5 Terminals, with Load Center, Horn Bypass, Ringless	18
100-200 Amps, 5 Terminals, with Load Center, Lever Bypass, Ringless.....	19
320 Amps, 5 Terminals, with Load Center, Lever Bypass, Ringless.....	20

Cold Sequence Meter Mains

200-320 Amps, 4-7 Terminals, Ringless	21-22
---	-------

Multi-Position Sockets

150-200 Amps, 5 Terminals, Ringless.....	23-24
--	-------

Multi-Position Sockets with Lever Bypass

200 Amps, 5 Terminals, Ringless.....	25
200 Amps, 7 Terminals, Ringless.....	26

Multi-Position Meter Mains

125-200 Amps, 5 Terminals, Ringless.....	27-28
200 Amps, 4 Terminals, Ringless, Lever Bypass	29-30

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Transformer Rated

Current Transformer Cabinets	31-33
CT Rated Sockets	34
CT Rated Cabinets	35

Pedestals

200 Amps, 5 Terminals, Meter Main with Load Center, Horn Bypass Ringless.....	36
100-200 Amps, 5 Terminals, Meter Main with Load Center, Horn Bypass, Ringless.....	37

Temporary Power Units

125 Amps, 4 Terminals, Ringless	38
---------------------------------------	----

Tap Box

3 Phase	39-40
---------------	-------

Surface and Pedestal Mount Power Outlets

125 Amps, 4 Terminals, Surface-Mount	41-42
Replacement Receptacle Parts	43
Lighting Accessories	44
Telecom and Pedestal Accessories	46
Pedestal Mounting Accessories	46
Metering and Receptacle Accessories	47

Miscellaneous

Replacement Parts for Millennium Series.....	48
Unmetered Load Centers.....	49
Breaker Enclosure	50
Circuit Breakers.....	51
Accessories.....	52-57
Meter Forms Reference Information.....	58
Conduit, Ampacity, and SCCR.....	59
Energization of Electrical Equipment	60
Materials and Finishes.....	61
Watthour Meter Forms	62
Standard NEMA Configurations	63
Power Distribution & Controls.....	64-73
NEMA Enclosures.....	74
Index.....	75-76




Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Catalog Number Logic

5

How Product Catalog Numbers are Derived

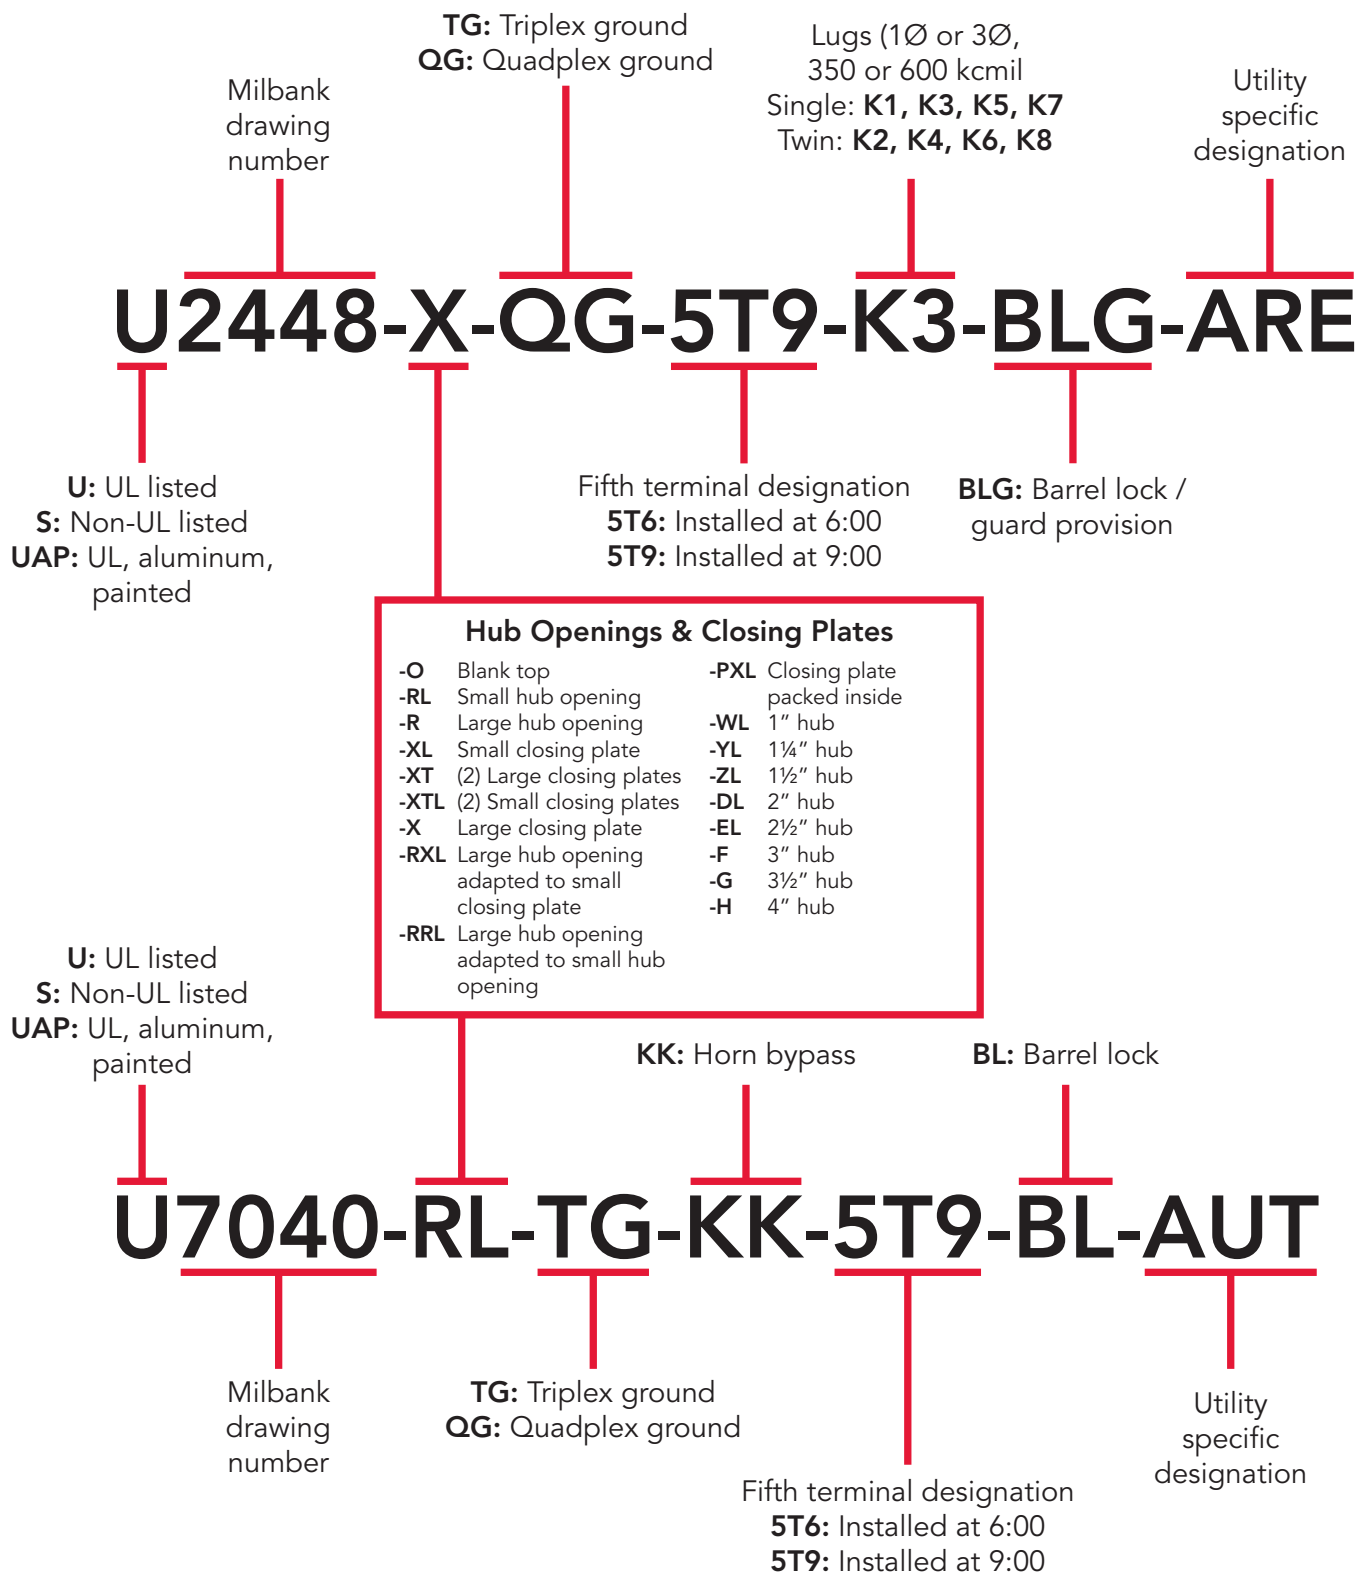

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Air Conditioner Disconnects

30-60 Amps | Fusible and Non-Fusible



U3802



U3812



U3832

Milbank's air conditioner disconnect features a removable hinged cover for easy installation. Our compact design meets NEC wiring space requirements and also complies with NEC Article 440-14. To ensure safe working conditions, our disconnect pullers can be removed and reinstalled in the OFF position. Additionally, padlock provisions are included on the front cover. Like other Milbank products, our enclosure is constructed of G90U galvanized steel and electrostatically finished with an attractive, light gray baked powder coating. Our epoxy/polyester resin blend provides a durable and fade-resistant finish.

30–60 Amps | Air Conditioner Disconnects | 1Ø 240V

Catalog Number	Amps	Type	Max H.P.	Weight (lbs.)	Line/Load Wire Range		Ground Wire Range CU/AL	Dimensions			Wire Rating	
					CU	AL		D"	W"	H"	CU °C	AL °C
U3802	60	Non-Fusible	10	3.25	#14-#2	#12-#2	#14-4	2 1/2	5	7 1/2	60°/75°	60°/75°
U3812	60	Non-Auto	10	3.25	#14-#2	#12-#2	#14-4	2 1/2	5	7 1/2	60°/75°	60°/75°
U3832	30	Fusible	3	2.5	#14-#3	#14-#3	#14-3	2 1/8	5	7	60°/75°	60°/75°
U3862	60	Fusible	10	3.3	#14-#3	#14-#3	#14-3	2 1/8	5	9	60°/75°	60°/75°

Notes

- UL-listed as Enclosed Pullout Switch
- NEMA 3R
- Weather-resistant
- One-inch concentric knockouts



Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Air Conditioner Disconnects

60 Amps | With 20 Amps GFCI Receptacle

7



U3822-20GWR

Specifications

- Meets NEC #406.8 requirements
- Meets NEC #210.63 requirements
- UL-listed as Power Outlet
- NEMA 3R
- In-use cover*
- Duplex ground connector
- One-inch concentric knockouts
- 1Ø, 240V
- 60 Amps, non-fused
- 20 Amps GFCI receptacle
- Reset/test button
- Weather- and tamper-resistant

60 Amps | Air Conditioner Disconnect with 20 Amps GFCI Receptacle | 1Ø, 240V


Catalog Number	Type	Max H.P.	Weight (lbs.)	Line/Load Wire Range		Ground Wire Range CU/AL	Dimensions			Wire Rating	
				CU	AL		D"	W"	H"	CU °C	AL °C
U3822-20GWR	Non-Fusible	10	6	#14-#2	#12-#2	#14-4	4 ⁴ / ₅	5 ¹ / ₄	7 ² / ₅	60°/75°	60°/75°

Notes


- **Disconnect pullouts:** To ensure the safest conditions, Milbank disconnect pullouts are reversible so they may be reinstalled in the OFF position.
 - **Padlock provision:** All units are designed with a padlock provision on the cover for security.
- *Rated as an in-use cover (cover may be closed with cords plugged into receptacle).

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



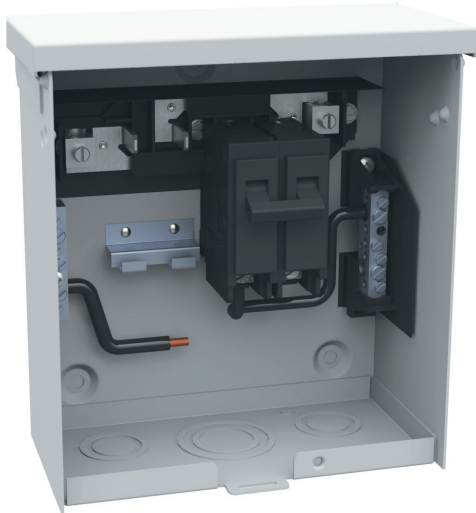

U4881-O-50GB

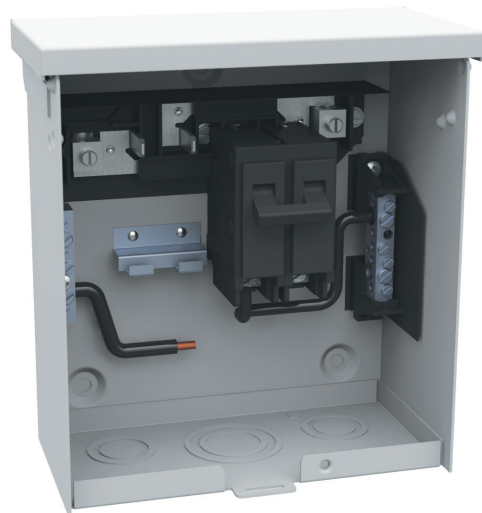

U4881-O-60GB

Specifications

- 240V ground fault protection
- UL-listed, NEMA 3R weather-resistant
- Two-pole, 50 or 60 Amps GFCI breaker protection
- Compact size
- Three- or four-wire installation
- 1Ø, 120/240V
- Standard package of 12
- 100 Amps overall rating
- Easy to install

100 Amps | Hot Tub Disconnect or Sub Panel Breaker Enclosure | NEMA 3R

Catalog Number	Breaker Amps	Type	Weight (lbs.)	Line/Load Wire Range		Ground Wire Range CU/AL	Dimensions		
				CU	AL		D"	W"	H"
U4881-O-50GB	50	Breaker	8	#14-1/0	#14-1/0	#14-1/0	3 ¾	7 ½	8 ½
U4881-O-60GB	60	Breaker	8	#14-1/0	#14-1/0	#14-1/0	3 ¾	7 ½	8 ½




Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.


Single Position Solar Socket

100 Amps | 4 Terminals | 600V

9

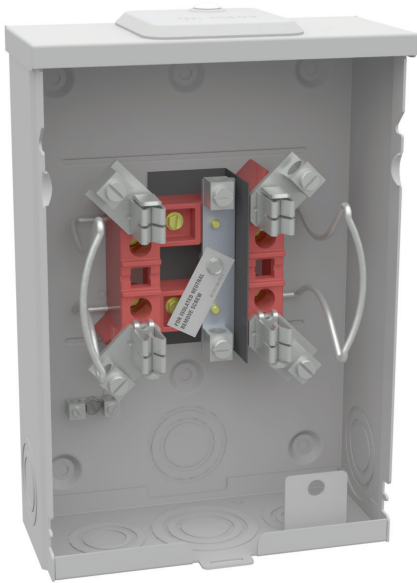

U5934-XL-BLG

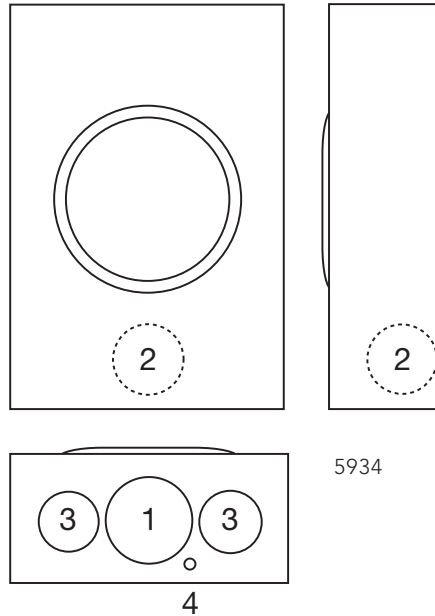

100 Amps | 4 Terminals | Integral Isolated Neutral Option

Catalog Number	Socket Type	Service	Hub	Connectors CU/AL		Dimensions			Knockouts			
				Line	Load	D"	W"	H"	1	2	3	4
U5934-XL-BLG	Ringless	OH/UG	C.P.	#12-1/0	#12-1/0	3 ⁵ / ₁₆	8	11 ¹ / ₂	2	1 ¹ / ₂	1 ¹ / ₄	1 ¹ / ₄

Notes

- **Fifth Terminal:** Requires fifth terminal kit **K5T**, sold separately.
- **-BLG:** Provision for barrel lock guard. Includes knockout and angle bracket.
- **Hubs:** Accepts standard meter socket hubs.
- **Construction:** Units are NEMA 3R for durable outdoor use, lockable and sealable.
- **Connectors:** Connectors will accept #12-1/0 conductors.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




Single Position Socket

100-200 Amps | 5 Terminals | Ringless | 240V



U7043-XL-TG-KK-IL-5T9W

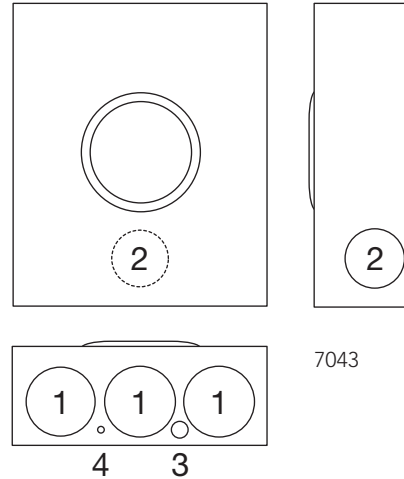

7043

100-200 Amps | 5 Terminals | Horn Bypass | **Residential**

Catalog Number	Amps	Phase	Application	Connectors CU/AL	Dimensions			Knockouts			
					D"	W"	H"	1	2	3	4
U7043-XL-TG-KK-IL-5T9W	100	1Ø3W or 3Ø3W	OH/UG	#6-350	4 ²¹ / ₂₅	13	15 ¹ / ₂	3	2 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₄
U7043-XL-TG-KK-IL-5T9W	200	1Ø3W or 3Ø3W	OH/UG	#6-350	4 ²¹ / ₂₅	13	15 ¹ / ₂	3	2 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₄

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- **Fifth terminal:** Factory-installed at 9 o'clock position.
- **Bypass:** The horn-type bypass is factory-installed. This permits changing and testing of the meter without interrupting customer service when used with utility-supplied jumpers.
- **480V services:** For all self-contained 480V services, please refer to Evergy Electric Service Standards for installation requirements.



Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Single Position Lever Bypass

200 Amps | 5-7 Terminals | Ringless | 600V


1 1



U9551-RXL-5T9-IL



U9701-XL-IL

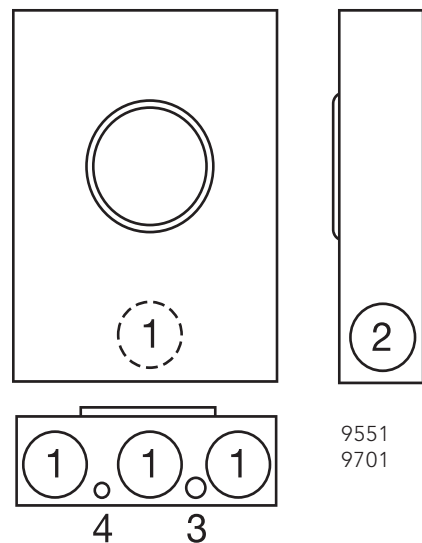

9551
9701

200 Amps | 5-7 Terminals | Lever Bypass | Ringless | **Commercial**

Catalog Number	Terminal	Service	Hub	Connectors CU/AL	Phase	Dimensions			Knockouts			
						D"	W"	H"	1	2	3	4
U9551-RXL-5T9-IL	5	OH/UG	C.P.	#6-350	1Ø3W or 3Ø3W	4 ²¹ / ₂₅	13	19	3	2 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₄
U9801-RXL-IL-GEN-TAP-5T9-EVE	5	OH/UG	C.P.	#6-350 and #14-1/0	1Ø3W or 3Ø3W	4 ²¹ / ₂₅	13	19	3	2 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₄
U9701-XL-IL-EVE	7	OH/UG	C.P.	#6-350	3Ø4W	4 ⁷ / ₈	13	19	3	2 ¹ / ₂	1 ¹ / ₄ , 1 ¹ / ₂	1 ¹ / ₄

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- **Connectors:** Extruded aluminum connectors are tin-plated. See Accessories page for lug kits.
- **Bypass:** The lever operates bypass device and supplies clamping action to meter spades.
- **480V services:** For all self-contained 480V services, please refer to Evergy Electric Service Standards for installation requirements.
- For isolated neutral on **U9701**, see **K1047 Isolated Neutral Kit** in accessories section.
- * **U9551** unit includes removable bonding strap for isolated neutral.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




Single Position Lever Bypass

320 Amps | 5-7 Terminals | Ringless | 600V




U4702-X-5T9-K3-K2-IL

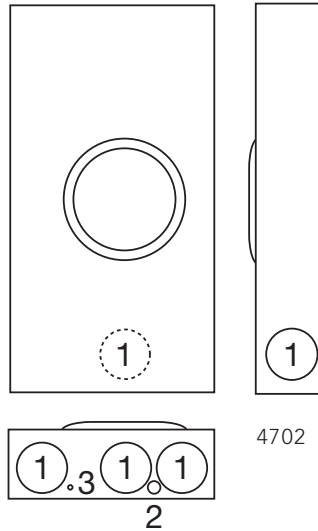

4702



U4013-X-2/K7-IL

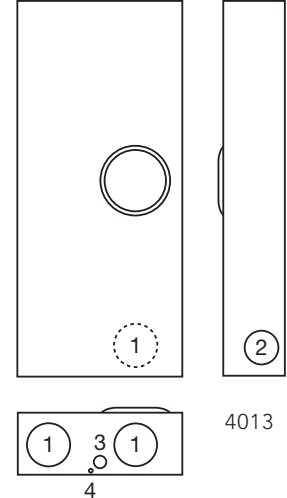

4013

320 Amps | 5-7 Terminals | Ringless | Lever Bypass | 600V | Residential and Commercial

Catalog Number	Terminals	Phase	Application	Connectors CU/AL		Dimensions			Knockouts			
				Line	Load	D"	W"	H"	1	2	3	4
U4702-X-5T9-K3-K2-IL	5	1Ø3W or 3Ø3W	OH/UG	#4-600 or (2) 1/0-250MCM	Twin-#6-350	4 ²¹ / ₂₅	15	28 ¹ / ₄	3	3	1/2	1/4
U2448-X-5T9-K3-K2-IL	5	1Ø3W or 3Ø3W	OH/UG	#4-600 or (2) 1/0-250MCM	Twin-#6-350	6 ¹ / ₂	7 ¹ / ₈	34 ¹ / ₁₀	4	3	1	1/8
U4013-X-2/K7-IL	7	3Ø4W	OH/UG/SW	#4-600 or (2) 1/0-250MCM	#4-600 or (2) 1/0-250MCM	6 ¹ / ₂	17 ³ / ₄	40 ¹ / ₂	4	3	1	1/4

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the accessories page.
- **Connectors:** Extruded aluminum connectors are tin-plated. See accessories page for lug kits.
- **Bypass:** The lever operates bypass device and supplies clamping action to meter spades.
- **480V Services:** For all self-contained 480V services, please refer to Evergy Electric Service Standards for installation requirements.
- For isolated neutral on **U4702**, see **K5979 Isolated Neutral Kit** in accessories section. For **U2448** and **U4013**, see **K5977**.




Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Meter Mains

200 Amps | 5 Terminals | Lever Bypass | Ringless | 240V

NEC 2020 Compliant

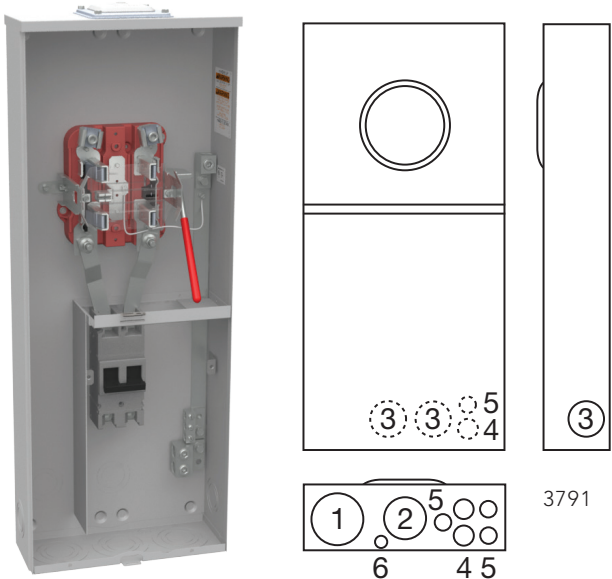

U3791NRXL200IL5T9WEVE

200 Amps | 5 Terminals | Lever Bypass | 120/240V | Commercial

Catalog Number	Service	Hub	Connectors CU/AL – Line	Load Side	Dimensions			Knockouts					
					D"	W"	H"	1	2	3	4	5	6
U3791NRXL100IL5T9WEVE	OH/UG	C.P.	#6-350	CB	4½	14⅛	30	3	2½	2	1	½,¾	¼,½
U3791NRXL150IL5T9WEVE	OH/UG	C.P.	#6-350	CB	4½	14⅛	30	3	2½	2	1	½,¾	¼,½
U3791NRXL200IL5T9WEVE	OH/UG	C.P.	#6-350	CB	4½	14⅛	30	3	2½	2	1	½,¾	¼,½

Notes



- **Hubs:** For proper hub selection, see the hub suffix chart on the accessories page.
- **Bypass:** The lever bypass on the **U3791N** supplies clamping action on the meter spades and also operates the bypass device (heavy duty).
- **Connectors:** Extruded aluminum connectors are tin-plated.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



150-200 Amps | 7 Terminals | Lever Bypass | Ringless | 120/208V

NEC 2020 Compliant

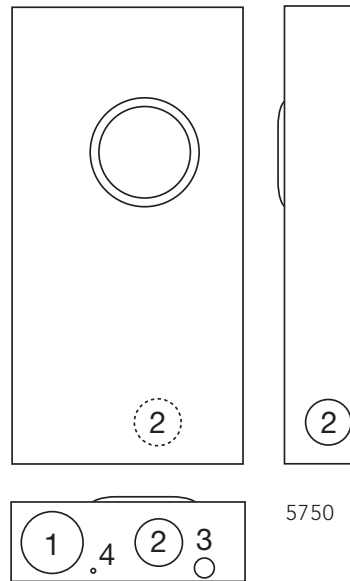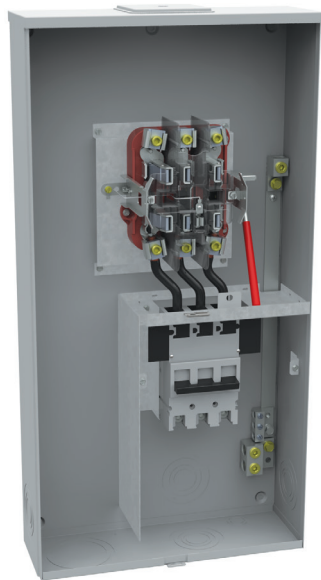

U5750-RXL-200-IL-EVE

150-200 Amps | 7 Terminals | Lever Bypass | 120/208V | **Commercial**

Catalog Number	Amps	OH/UG	Phase	Connectors CU/AL – Line	Dimensions			AIC	Knockouts			
					D"	W"	H"		1	2	3	4
U5750-RXL-150-IL-EVE	150	OH/UG	3Ø4W	#6-350	5 ³ / ₄	17 ³ / ₄	34	10K	4	1	1	1/4
U5750-RXL-200-IL-EVE	200	OH/UG	3Ø4W	#6-350	5 ³ / ₄	3/4	34	10K	4	1	1	1/4

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- **Bypass:** The heavy duty lever-type bypass is factory installed and permits changing and testing of the meter without interrupting customer service when lever is in the raised position.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.


Meter Mains with Lever Bypass

15


320 Amps | 4-7 Terminals | Ringless | 480V | NEC 2020 Compliant



U6227X400K3LIL5T9WEVE

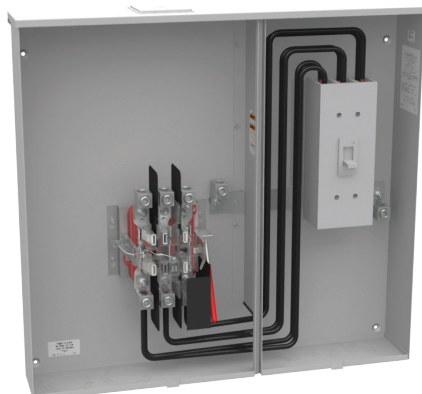

U6229-X-400-K7L-IL-EVE

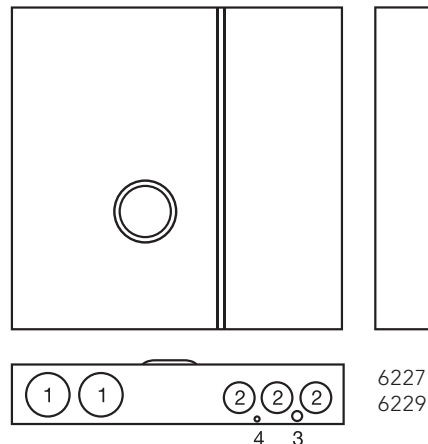

6227
6229

320 Amps | 5 Terminals | Heavy Duty Lever Bypass | 480V | **Commercial**

Catalog Number	Amps	OH/UG	Phase	Breakers	Dimensions			Knockouts			
					D"	W"	H"	1	2	3	4
U6227X400K3LIL5T9WEVE	320	OH/UG	1Ø3W	400A	6	36¼	34	4	2½	½	¼

320 Amps | 7 Terminals | Heavy Duty Lever Bypass | 480V | **Commercial**

Catalog Number	Amps	OH/UG	Phase	Breakers	Dimensions			Knockouts			
					D"	W"	H"	1	2	3	4
U6229-X-400-K7L-IL-EVE	320	OH/UG	3Ø4W	400A	6	36¼	34	4	2½	½	¼

Notes

- **AIC rating:** 22K AIC at 240V; and 10K AIC at 480V.
- **Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- **Bypass:** The heavy duty lever-type bypass is factory-installed and permits changing and testing of the meter without interrupting customer service when lever is in the raised position.
- **300 Amps breaker:** Can be installed from the factory (upon request).

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




16

Meter Mains with Lever Bypass


320 Amps | 5 Terminals | Ringless | 240V | **NEC 2020 Compliant**



U6585X2200K3L5T9WILEVE

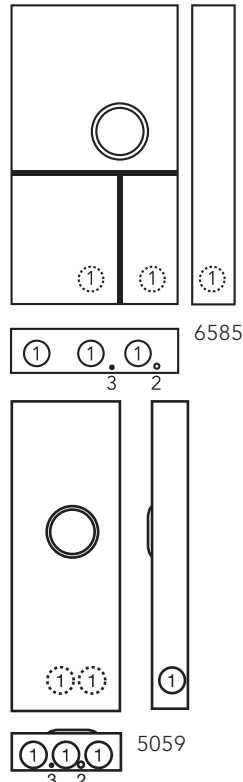

U6601-X-2/200-K3L-5T9-EVE

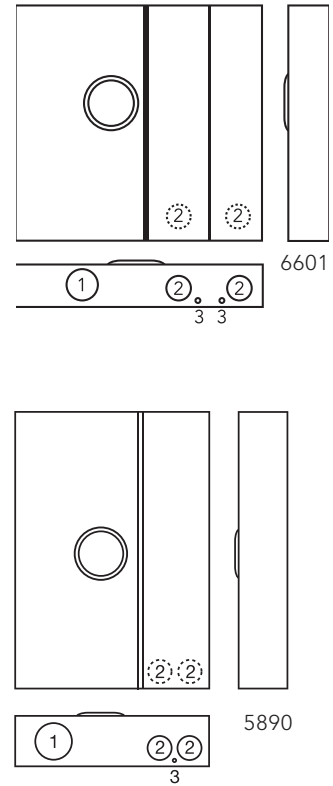

320 Amps | 5 Terminal | Heavy Duty Lever Bypass | 22K AIC | **NEC 2020 Compliant**

Catalog Number	Service	Hub	Connectors CU/AL	Breakers	Dimensions			Knockouts		
			Line		D"	W"	H"	1	2	3
U6585X2200K3L5T9WILEVE	OH/UG	C.P.	#4-600 or (2) 1/0-250MCM	(2) X 200A	4 ^{27/32}	20 ^{1/4}	45	2 ^{1/2}	1 ^{1/2} , 1/4	1/4
U6601-X-2/200-K3L-5T9-EVE	OH/UG	C.P.	#4-600 or (2) 1/0-250MCM	(2) X 200A	6	34 ^{1/8}	35	4	2 ^{1/2}	1 ^{1/2} , 1/4

Notes


- **Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- **Breakers:** All units come with two, 200 Amps main breakers.
- **Short circuit current rating:** Rating is 22K AIC. Note, this rating is limited to the lowest interrupting capacity of any circuit breaker installed. Watthour meter not included in short circuit current rating.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Meter Mains with Lever Bypass

400 Amps | 7 Terminals | Ringless | 480V | *NEC 2020 Compliant*

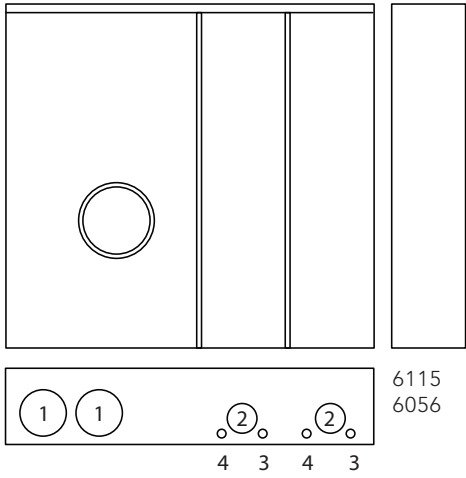

U6056-X-2/200-K7L-IL-EVE

320 Amps | 7 Terminals | Heavy Duty Lever Bypass | Ringless | *NEC 2020 Compliant*

Catalog Number	Service	Hub	Connectors CU/AL	Breakers	Dimensions			Knockouts			
			Line		D"	W"	H"	1	2	3	4
U6056-X-2/200-K7L-IL-EVE	OH/UG	C.P.	#4-600 kcmil or (2) 1/0 - 250	(2) X 200A	7	36¼	34	4	2½	½	¼

Notes

- **Hubs:** For proper hub selection, please contact your local Manufacturers' representative.
- **Bypass:** The lever supplies clamping action on meter spades and also operates the bypass devices.
- **Short circuit current rating:** Rating is 22K AIC. Note, this rating is limited to the lowest interrupting capacity of any circuit breaker installed. Watthour meter not included in short circuit current rating.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




Meter Mains with Load Center

100-200 Amps | 5 Terminals | Ringless | 120/240V

NEC 2020 Compliant



U5168XL100KKIL5T9WEVE

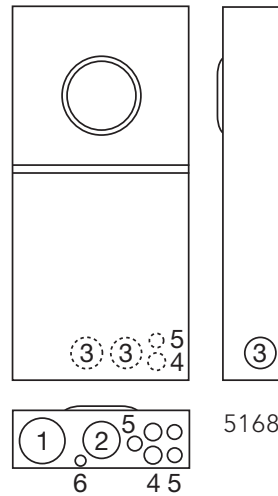


100-200 Amps | 5 Terminals | Horn Bypass | Ringless | OH/UG | 120/240V | Residential

Catalog Number	Amps	Hub	Connectors CU/AL – Line	Branch Circuits	Dimensions			Knockouts					
					D"	W"	H"	1	2	3	4	5	6
U5168XL100KKIL5T9WEVE	100	C.P.	#6-350	10	4½	14⅞	30	3	2½	2	1	½, ¾	¼, ½
U5168XL150KKIL5T9WEVE	150	C.P.	#6-350	8	4½	14⅞	30	3	2½	2	1	½, ¾	¼, ½
U5168XL200KKIL5T9WEVE	200	C.P.	#6-350	8	4½	14⅞	30	3	2½	2	1	½, ¾	¼, ½

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- **AIC rating:** The **U5168** are rated 22K AIC when using Siemens **QPH** (100 Amps) or **QNH** (200 Amps) breakers.
- **Bypass:** The horn-type bypass is factory-installed. This permits changing and testing of the meter without interrupting customer service when lever is in the raised position.
- **Load side feed through lugs:** Included on load center.

Generator Interlock (compatible with U5168)

	K5815 Large QN with small frame Q .	K5820 Large frame QN with large frame QN .	K5830 Small frame Q to small frame Q .
---	--	---	---

Branch Breaker Chart

AIC Rating	Amps	Siemens	Cutler Hammer	General Electric	Square D
10k	150-200	QNR	BR (150A only)	—	—
	≤ 125	QP	HQP, BR	THQL, THQL-GF	Homeline
22k	150-200	QNRH	—	—	—
	≤ 125	QPH	—	—	—



Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Meter Mains with Load Center


19

100-200 Amps | 5 Terminals | Lever Bypass | Ringless | 120/240V

NEC 2020 Compliant



U6281-XL-100-IL-5T9W-EVE

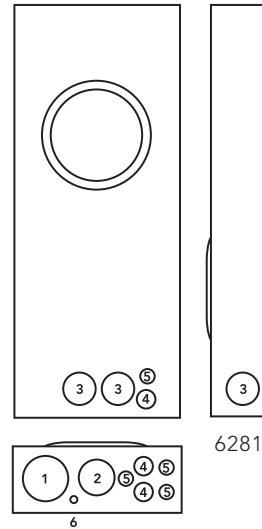

6281

100-200 Amps | 5 Terminals | Lever Bypass | Ringless | OH/UG | 120/240V | Commercial

Catalog Number	Amps	Hub	Connectors CU/AL – Line	Branch Circuits	Dimensions			Knockouts				
					D"	W"	H"	1	2	3	4	5
U6281-XL-100-IL-5T9W-EVE	100	C.P.	#6-350	10	4½	14⅞	34	3	2½	2½	1	¾
U6281-XL-150-IL-5T9W-EVE	150	C.P.	#6-350	8	4½	14⅞	34	3	2½	2½	1	¾
U6281-XL-200-IL-5T9W-EVE	200	C.P.	#6-350	8	4½	14⅞	34	3	2½	2½	1	¾

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- **AIC rating:** The **U6281** are rated 22K AIC when using Siemens **QPH** (100 Amps) or **QNH** (200 Amps) breakers.
- **Bypass:** The heavy duty lever type bypass is factory-installed. This permits changing and testing of the meter without interrupting customer service when used when lever is in the raised position.
- **Load side feed through lugs:** Included on load center.

Generator Interlock (compatible with U6281)

	K5815	K5820	K5830
	Large QN with small frame Q	Large frame QN with large frame QN	Small frame Q to small frame Q

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



20

Meter Mains with Load Center


320 Amps | 5 Terminals | Ringless | 240V | **NEC 2020 Compliant**



U6603-X-2/200-K3L-5T9-EVE



U6602-X-2/200-K3L-5T9-EVE

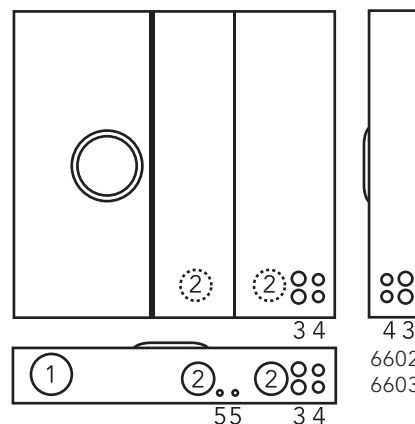

320 Amps | 5 Terminals | OH/UG | 1Ø3W | **NEC 2020 Compliant**

Catalog Number	Hub	Connectors CU/AL	Breakers	Load Centers	Dimensions			Knockouts				
		Line			D"	W"	H"	1	2	3	4	5
U6602-X-2/200-K3L-5T9-EVE	C.P.	#4-600 or (2) 1/0-250MCM	(2) X 200A	10 (with feed-through lugs)	6	38	41	4	2½	1	½,¾	¼
U6603-X-2/200-K3L-5T9-EVE	C.P.	#4-600 or (2) 1/0-250MCM	(2) X 200A	22 (with feed-through lugs)	6	38	41	4	2½	1	½,¾	¼

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- **Breakers:** All units come with two, 200 Amps main breakers. For branch breakers, please contact your local Manufacturers' representative.
- **Short circuit current rating:** Rating is 22K AIC. Note, this rating is limited to the lowest interrupting capacity of any circuit breaker installed. Watthour meter not included in short circuit current rating.




Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Cold Sequence Knife Switch

21

200 Amps | 4-7 Terminals | *Evergy Approved*

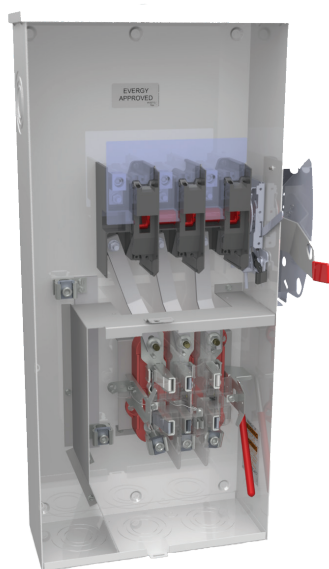

U6550



U6554

Features

The U6550 requires less space than using a meter socket and disconnect, making it aesthetically pleasing with fewer components and allowing for faster installation.

- Easy installation
- All-in-one socket knife switch combo
- Durable enclosure
- NEMA 3R rated
- Standard enclosure: Powder-coated galvanized steel
- Optional enclosure materials: Stainless steel or aluminum
- SCCR rating of 10K
- Wide range of optional utility-specified components including:
 - Stainless steel hasp
 - Isolated neutral
 - Barrel lock
- UL-listed
- Manufactured in the USA

200 Amps | 4-7 Terminals | Cold Sequence Knife Switch

Catalog Number	Terminals	Phase	Dimensions			Knockout		
			D"	W"	H"	1	2	3
U6549-XL-200NF-5T9-IL-LG	4 or 5	1Ø3W & Network	5¾	15	33½	4	2½	½
U6615-XL-200NF-5T9-IL-LG (Delta)	5	3Ø3W	5¾	15	33½	4	2½	½
U6550-XL-200NF-IL-LG	7	3Ø4W	5¾	15	33½	4	2½	½

320 Amps | 5-7 Terminals | Cold Sequence Knife Switch

Catalog Number	Terminals	Phase	Dimensions			Knockout		
			D"	W"	H"	1	2	3
U6553-X-400NF-K3L-IL-5T9W	5	1Ø3W	8¼	22	55	4	3	½
6554-X-400NF0K7L-IL	7	3Ø4W	8¾	22	55	4	3	½

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.






22

Cold Sequence Knife Switch



200-320 Amps | 4-7 Terminals | *Evergy Approved*

200 Amps

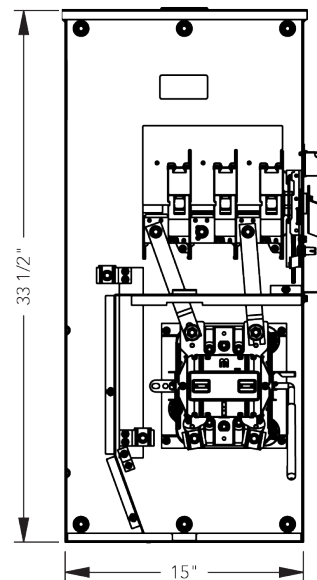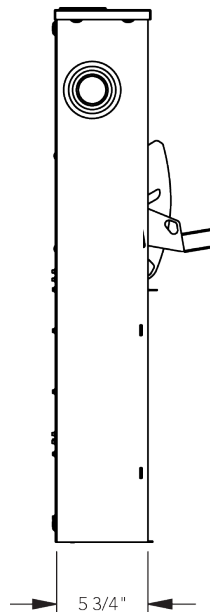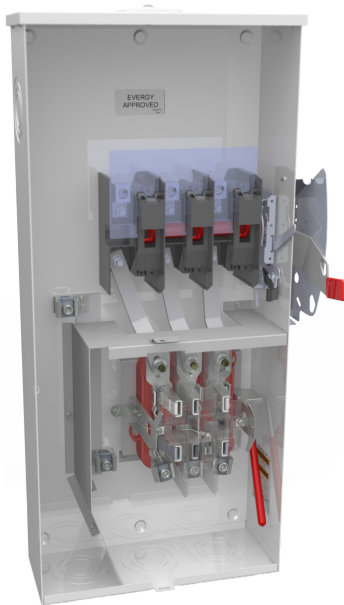

**U6549
U6615
U6550**

320 Amps

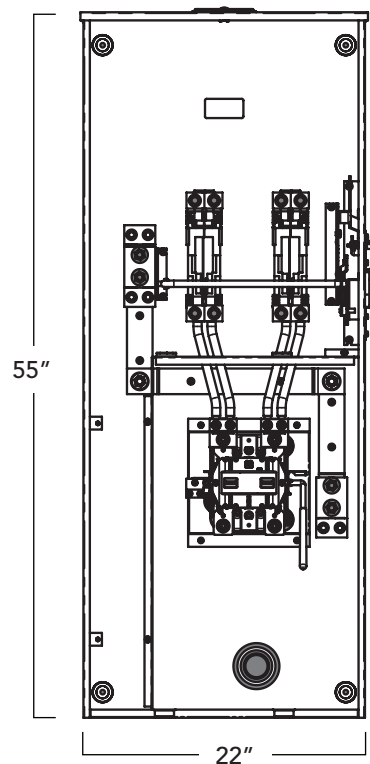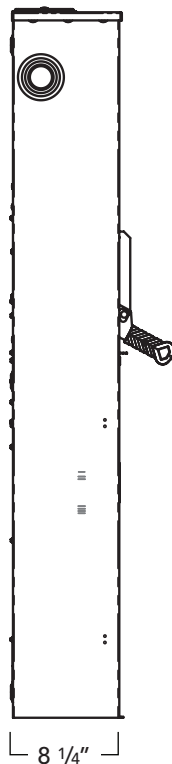

**U6553
U6554**




Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.


Multi-Position Sockets

23

150-200 Amps | 5 Terminals | Ringless | 300V

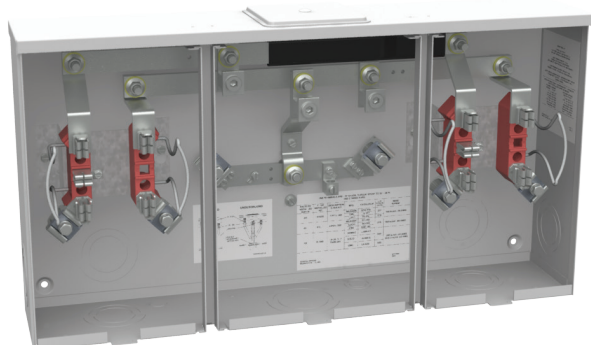

U1232-X-5T-K1

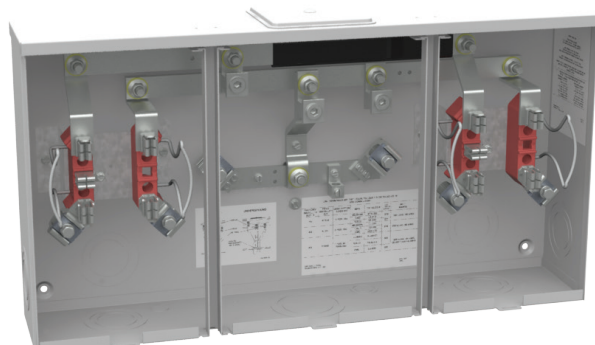

U1252-X-5T-K1

150 Amps per Position | 5 Terminals | Multi-Position | Ringless | Residential

Catalog Number	Positions	Service	Hub	Connectors CU/AL		Dimensions		
				Line	Load	D"	W"	H"
U1232-X-5T-K1	2	OH/UG	H.O.	#6-350	#6-350	5 $\frac{1}{8}$	26 $\frac{1}{2}$	14
U1233-X-5T-K3	3	OH/UG	H.O.	#6-350	#6-350	5 $\frac{1}{8}$	34 $\frac{3}{4}$	14
U1234-X-5T-K3	4	OH/UG	C.P.	#6-350	#6-350	5 $\frac{1}{8}$	42 $\frac{7}{8}$	16

200 Amps per Position | 5 Terminals | Multi-Position | Ringless | Residential

Catalog Number	Positions	Service	Hub	Connectors CU/AL		Dimensions		
				Line	Load	D"	W"	H"
U1252-X-5T-K1	2	OH/UG	C.P.	#6-350	#6-350	5 $\frac{1}{8}$	26 $\frac{1}{8}$	14
U1253-X-5T-K1	3	OH/UG	C.P.	#6-350	#6-350	5 $\frac{1}{8}$	34 $\frac{3}{4}$	14
U1254-X-5T-K4	4	OH/UG	C.P.	4-600	#6-350	5 $\frac{1}{8}$	42 $\frac{7}{8}$	16
U1255-X-5T-K4	5	OH/UG	C.P.	4-600	#6-350	5 $\frac{1}{8}$	54 $\frac{5}{8}$	16
U1256-X-5T-K4	6	OH/UG	C.P.	4-600	#6-350	5 $\frac{1}{8}$	62 $\frac{9}{8}$	18











Notes

- **Knockouts:** Knockouts are referenced on the following page.
- **Hubs:** For proper hub selection, refer to the hub suffix chart on the Accessories page.
- **Connector kits:** For line side connector kits, see Accessories page.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Knockouts				
1	2	3	4	5
3	2½	1	½	¼

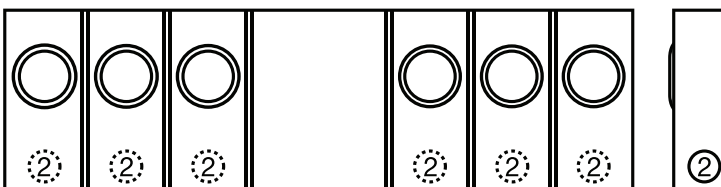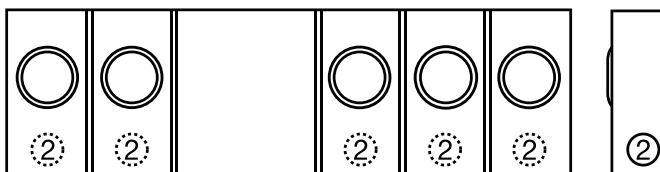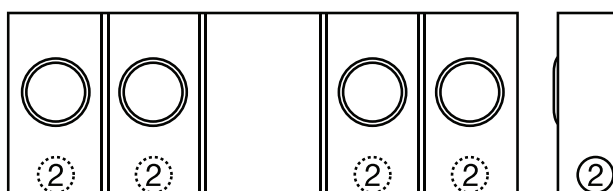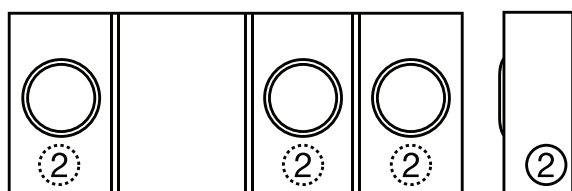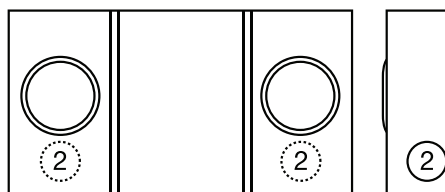


Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.


Lever Bypass Multi-Position Sockets

25



200 Amps | 5 Terminals | Ringless | 300V

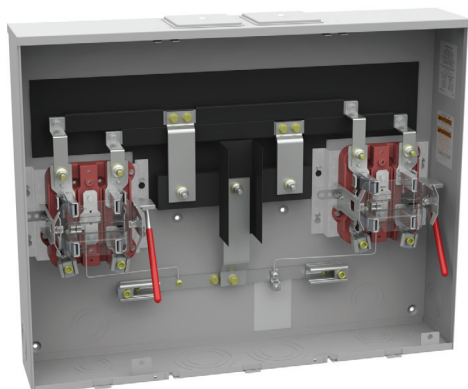



U2872-XT-5T9-K4

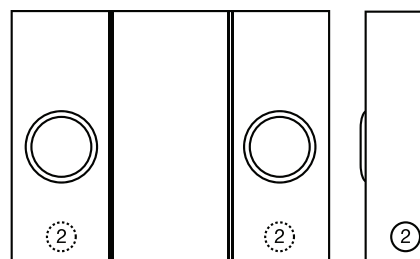



2872

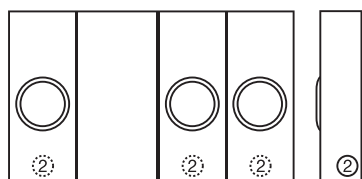



2873

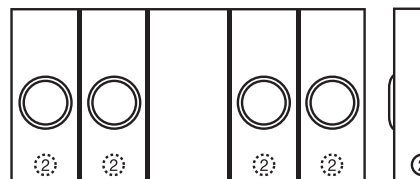


2874

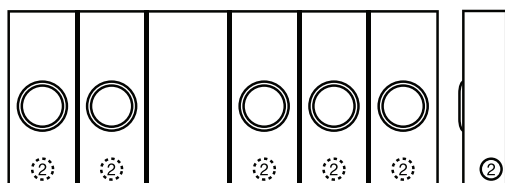

2875

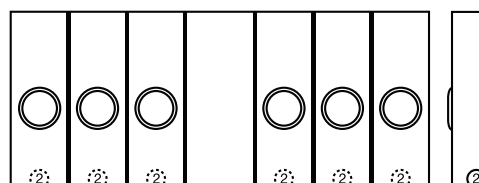

2876



200 Amps per Position | 5 Terminals | Lever Bypass | Ringless | 300V | **Commercial**


Catalog Number	Positions	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts		
				Line	Load		D"	W"	H"	1	2	3
U2872-XT-5T9-K4	2	OH/UG	(2) C.P.	#6-350	#6-350	Lever	6	32 ¹ / ₈	25 ¹ / ₄	4	2 ¹ / ₂	1 ¹ / ₄ , 1 ¹ / ₂
U2873-XT-5T9-K4	3	OH/UG	(2) C.P.	#6-350	#6-350	Lever	6	42 ³ / ₁₆	25 ¹ / ₄	4	2 ¹ / ₂	1 ¹ / ₄ , 1 ¹ / ₂
U2874-XT-5T9-K4	4	OH/UG	(2) C.P.	4-600	#6-350	Lever	6	52 ¹ / ₄	25 ¹ / ₄	4	2 ¹ / ₂	1 ¹ / ₄ , 1 ¹ / ₂
U2875-XT-5T9-K4	5	OH/UG	(2) C.P.	4-600	#6-350	Lever	6	62 ⁵ / ₁₆	25 ¹ / ₄	4	2 ¹ / ₂	1 ¹ / ₄ , 1 ¹ / ₂
U2876-XT-5T9-K4	6	OH/UG	(2) C.P.	4-600	#6-350	Lever	6	72 ³ / ₈	31 ¹ / ₄	4	2 ¹ / ₂	1 ¹ / ₄ , 1 ¹ / ₂

Notes


- **Hubs:** To order additional hubs, refer to the hub suffix chart on the Accessories page.
- **Connector kits:** For line side connector kits, see Accessories page.
- **Bypass:** The lever operates bypass device and supplies clamping action to meter spades.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




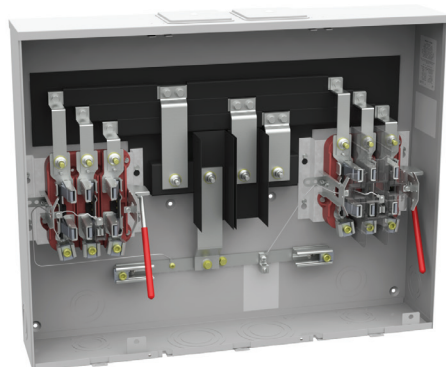


U2732-XT-K4




2732

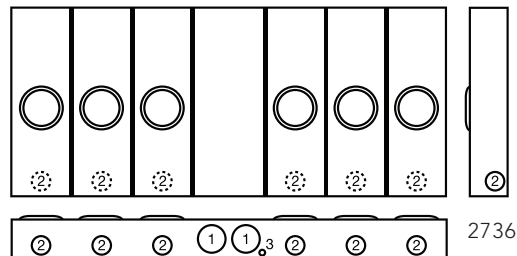


2736

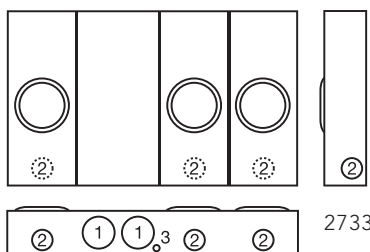

2733

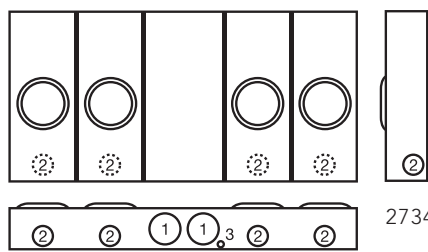

2734

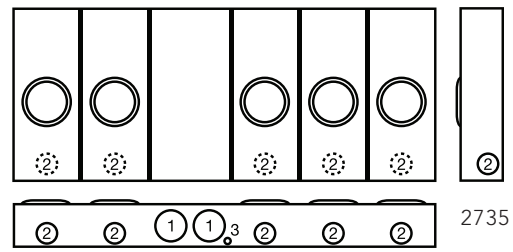

2735

200 Amps per Position | 3Ø4W | 7 Terminals | Lever Bypass | Ringless | 300V | **Commercial**

Catalog Number	Positions	Service	Hub	Connectors CU/AL		Dimensions			Knockouts		
				Line	Load	D"	W"	H"	1	2	3
U2732-XT-K4	2	OH/UG	(2) C.P.	#6-350	#6-350	6	32 ¹ / ₈	25 ¹ / ₄	4	2 ¹ / ₂	1 ¹ / ₄ , 1 ¹ / ₂
U2733-XT-K4	3	OH/UG	(2) C.P.	#6-350	#6-350	6	42 ³ / ₁₆	25 ¹ / ₄	4	2 ¹ / ₂	1 ¹ / ₄ , 1 ¹ / ₂
U2734-XT-K4	4	OH/UG	(2) C.P.	4-600	#6-350	6	52 ¹ / ₄	25 ¹ / ₄	4	2 ¹ / ₂	1 ¹ / ₄ , 1 ¹ / ₂
U2735-XT-K4	5	OH/UG	(2) C.P.	4-600	#6-350	6	62 ⁵ / ₁₆	25 ¹ / ₄	4	2 ¹ / ₂	1 ¹ / ₄ , 1 ¹ / ₂
U2736-XT-K4	6	OH/UG	(2) C.P.	4-600	#6-350	6	72 ³ / ₈	25 ¹ / ₄	4	2 ¹ / ₂	1 ¹ / ₄ , 1 ¹ / ₂

Notes

- **Hubs:** Units supplied with two closing plates. To order additional hubs, refer to the hub suffix chart on the Accessories page.
- **Connector kits:** For line side connector kits, see Accessories page.
- **Bypass:** The lever operates bypass device and supplies clamping action to meter spades.



Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Multi-Position Meter Mains

27

125-200 Amps | 5 Terminals | Ringless | 120/240V

NEC 2020 Compliant



U5902-X-KK-K3-5T-KCPL



U5882-X-KK-K3-5T-KCPL

125 Amps per Position | 5 Terminals | Ringless | 120/240V | 22K AIC | Residential

Catalog Number	Positions	Service	Hub	Connectors CU/AL	Dimensions			Weight (lbs.)
				Line	D"	W"	H"	
U5902-X-KK-K4-5T-KCPL	2	OH/UG	C.P.	#4-600MCM	5 $\frac{1}{8}$	26 $\frac{1}{2}$	30	58
U5903-X-KK-K4-5T-KCPL	3	OH/UG	C.P.	#4-600MCM	5 $\frac{1}{8}$	34 $\frac{5}{9}$	30	88
U5904-X-KK-K4-5T-KCPL	4	OH/UG	C.P.	#4-600MCM	5 $\frac{1}{8}$	41 $\frac{4}{5}$	30	107
U5905-X-KK-K4-5T-KCPL	5	OH/UG	C.P.	#4-600MCM	5 $\frac{1}{8}$	51 $\frac{1}{20}$	30	128
U5906-X-KK-K4-5T-KCPL	6	OH/UG	C.P.	#4-600MCM	5 $\frac{1}{8}$	59 $\frac{3}{10}$	30	146

200 Amps per Position | 5 Terminals | Ringless | 120/240V | 22K AIC | Residential

Catalog Number	Positions	Service	Hub	Connectors CU/AL	Dimensions			Weight (lbs.)
				Line	D"	W"	H"	
U5882-X-KK-K4-5T-KCPL	2	OH/UG	C.P.	#4-600MCM	5 $\frac{1}{8}$	26 $\frac{1}{2}$	30	58
U5883-X-KK-K4-5T-KCPL	3	OH/UG	C.P.	#4-600MCM	5 $\frac{1}{8}$	34 $\frac{5}{9}$	30	88
U5884-X-KK-K4-5T-KCPL	4	OH/UG	C.P.	#4-600MCM	5 $\frac{1}{8}$	41 $\frac{4}{5}$	30	107
U5885-X-KK-K4-5T-KCPL	5	OH/UG	C.P.	#4-600MCM	5 $\frac{1}{8}$	51 $\frac{1}{20}$	30	128
U5886-X-KK-K4-5T-KCPL	6	OH/UG	C.P.	#4-600MCM	5 $\frac{1}{8}$	59 $\frac{3}{10}$	30	146

Breaker Chart - 10K AIC (unless noted 22K)

Manufacturer	Cutler-Hammer	Siemens	GE (50 Amps Max)	Square D
125 Amps or Less	BR, HQP, QPGF	QP, QPH (22K)	THQL, THQL-GF	Homeline
150-200 Amp	—	QN, QNH (22K)	—	—






Notes

- AIC rating:** Rating is 22K AIC. Note, this rating is limited to the lowest interrupting capacity of any circuit breaker installed. Watthour meter not included in short circuit current rating.
- Hub:** Units supplied with one closing plate. To order hubs separately, please contact your local representative.
- Load side connectors:** Dependent upon field-installed breaker.
- Bypass:** The horn-type bypass is factory-installed. This permits changing and testing of the meter without interrupting customer service when used with utility-supplied jumpers.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Knockouts				
1	2	3	4	5
3	2½	1	7/8	1/4

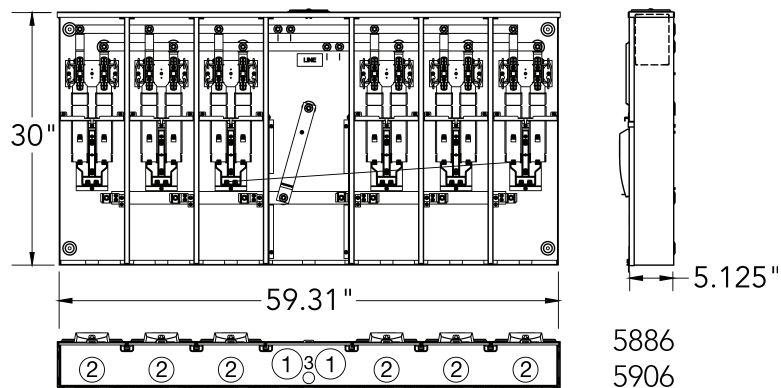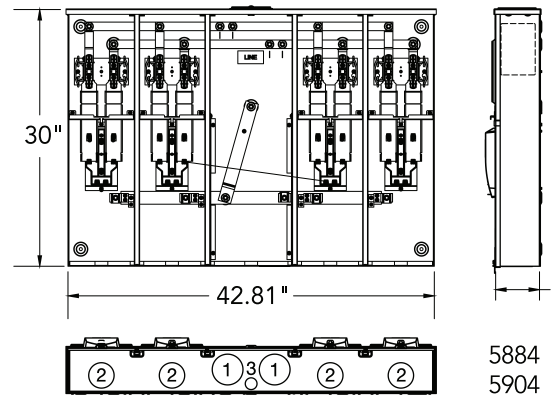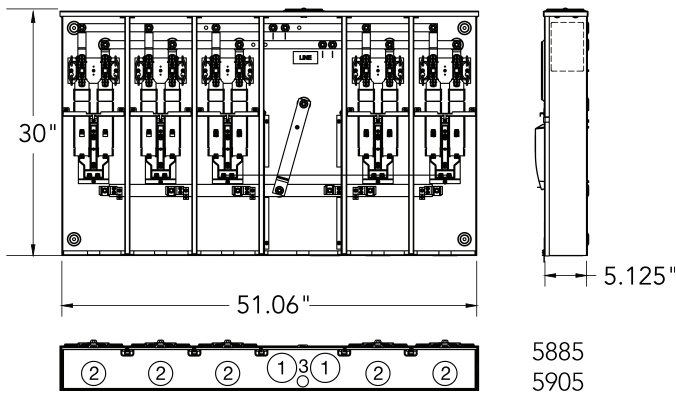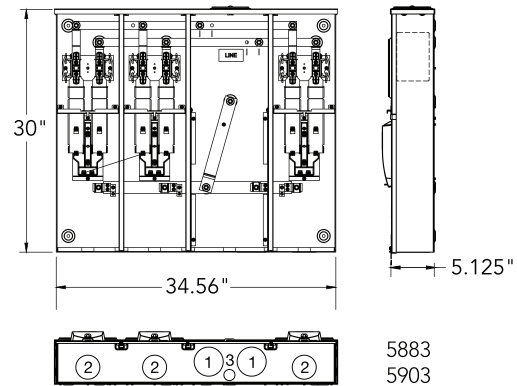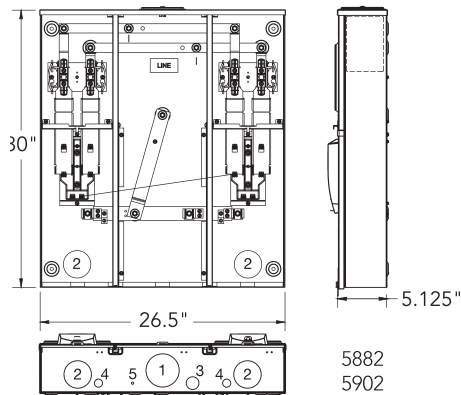

Multi-Position Meter Mains

29

200 Amps | Lever Bypass | 240V | **NEC 2020 Compliant**



U5972-Xt-5T9-BL

200 Amps | 5 Terminals | Ringless | Lever Bypass | **Commercial**

Catalog Number	Positions	Service	Main Bus Rating	Hub	Connectors CU/AL	Dimensions			Knockouts			
					Line	D"	W"	H"	1	2	3	4
U5972-Xt-5T9-BL-K4	2	OH/UG	320 Amps	(2) C.P.	#4-600MCM	5 ³ / ₃₂	36 ³ / ₈	34	4	2 ¹ / ₂	1	1 ¹ / ₂
U5973-Xt-5T9-BL-K4	3	OH/UG	480 Amps	(2) C.P.	#4-600MCM	5 ³ / ₃₂	46 ¹ / ₂	34	4	2 ¹ / ₂	1	—
U5974-Xt-5T9-BL-K4	4	OH/UG	640 Amps	(2) C.P.	#4-600MCM	5 ³ / ₃₂	57 ¹ / ₁₆	34	4	2 ¹ / ₂	1	—
U5975-Xt-5T9-BL-K4	5	OH/UG	640 Amps	(2) C.P.	#4-600MCM	5 ³ / ₃₂	67 ¹ / ₈	34	4	2 ¹ / ₂	1	—
U5976-Xt-5T9-BL-K4	6	OH/UG	640 Amps	(2) C.P.	#4-600MCM	5 ³ / ₃₂	77 ⁹ / ₁₆	34	4	2 ¹ / ₂	1	—

Breaker Chart - 10K AIC (unless noted 22K)






Manufacturer	Cutler-Hammer	Siemens	GE (50 Amps Max)	Square D
125 Amps or Less	BR, HQP, QPGF	QP, QPH (22K)	THQL, THQL-GF	Homeline
150-200 Amp	—	QN, QNH (22K)	—	—

Notes

- **Knockouts:** See drawings on following page.
- **Short circuit current rating:** All models are rated 22K AIC when used with approved breakers rated at 22K.
- **Bypass:** These units have locking jaw lever bypass.
- **Hubs:** Units supplied with two closing plate. To order separately, see the hub suffix chart on the Accessories page.
- **Fifth terminal:** Fifth terminals are factory-installed in the 9 o'clock position.
- **-BL:** Barrel lock provision.
- **Line side connectors:** Socket is supplied with 3/8" - 16 hex head nuts with Belleville washers. Separate lug kits are required for line side.
- **Load side connectors:** Dependent upon field-installed breaker.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



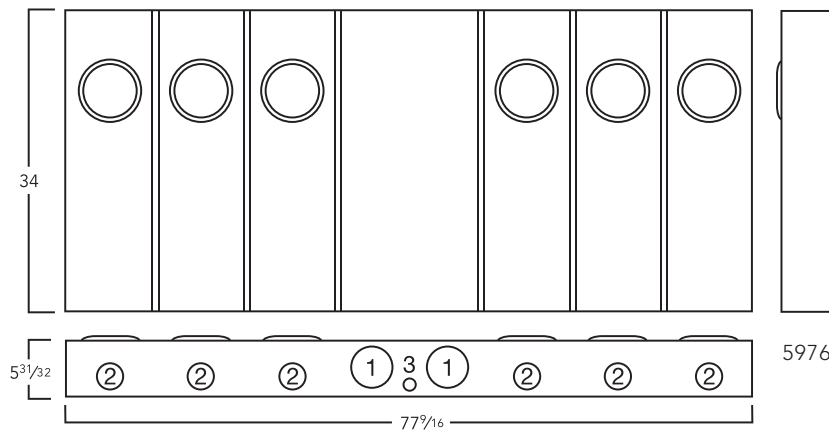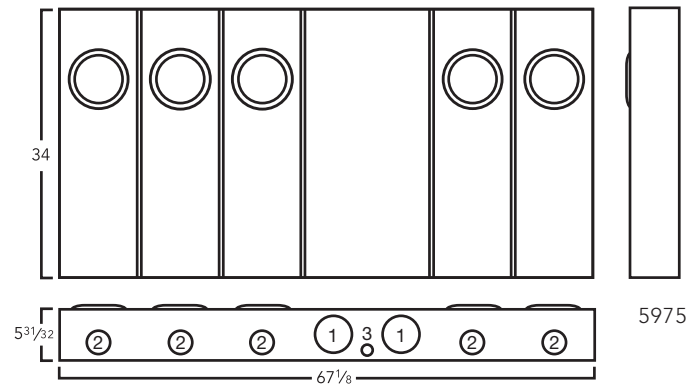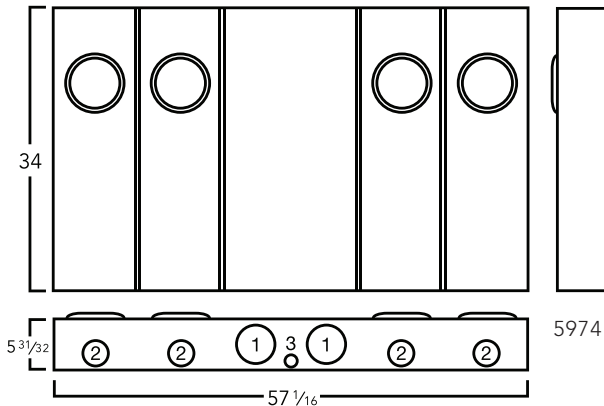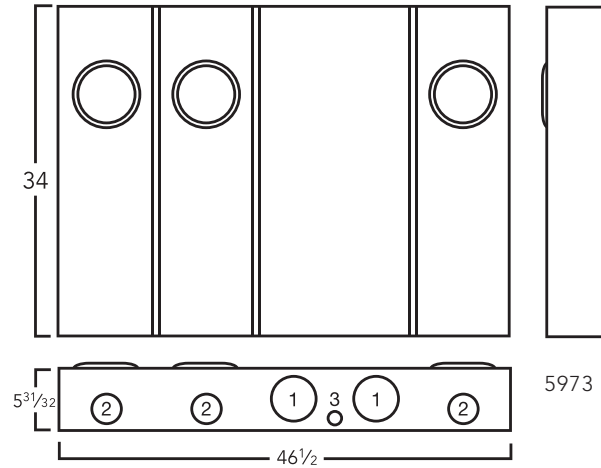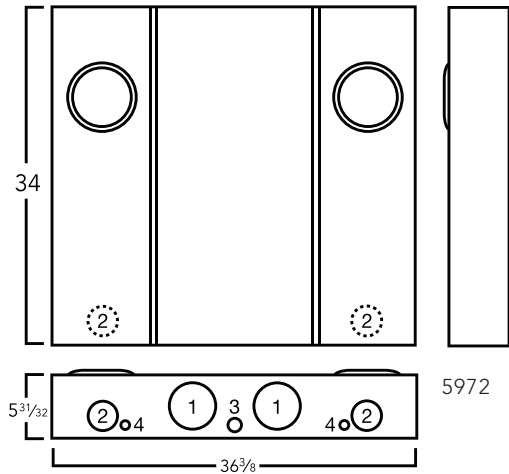

Knockouts			
1	2	3	4
4	2 1/2	1	1/2
4	2 1/2	1	—
4	2 1/2	1	—
4	2 1/2	1	—
4	2 1/2	1	—

Current Transformer Cabinets

31

Every Approved



Highlights and Features

- **Three-point latching handle and locking mechanism:**
 - Padlocking handle with three-point latching system allows for easy locking and securing of the unit.
- **Lugs:**
 - Tin-plated aluminum, suitable for aluminum or copper conductors rated for 90°. Lugs are sized for #4-600 MCM on cabinets up to 1200, and 1/0-750 MCM on cabinets 1600A and above. If different size lugs are required, please contact your local Manufacturers' representative.
- **Potential tap:**
 - Included on buss
- **Grounding lug:**
 - Single position, 350 kcmil.
- **Wind-stop latch**
- **Aluminum shell enclosure**
- **UL-listed**
- **NEMA Type 3R**
- **Aluminum piano-hinged doors**
- **Includes CT supports and wall-mount brackets.**

Current Transformer Cabinets | Overhead Service Entry


Catalog Number	Amps	Voltage	Service	Phase	Fault Current Rating	# of Lugs		Dimensions			Hinged Doors
						Line	Load	H"	W"	D"	
KCPLM-413*	400	600	OH	1Ø3W	50,000 Amps	1	1	48	25	10	Single
KCPLM-433*	400	600	OH	3Ø3W	50,000 Amps	1	1	48	25	10	Single
KCPLM-434*	400	600	OH	3Ø4W	50,000 Amps	1	1	48	25	10	Single
KCPLM-813	800	600	OH	1Ø3W	65,000 Amps	3	3	42	24	8½	Single
KCPLM-833	800	600	OH	3Ø3W	65,000 Amps	3	3	42	24	8½	Single
KCPLM-834	800	600	OH	3Ø4W	65,000 Amps	3	3	42	24	8½	Single
KCPLM-1233	1200	600	OH	3Ø3W	85,000 Amps	4	4	48	36	14½	Single
KCPLM-1234	1200	600	OH	3Ø4W	85,000 Amps	4	4	48	36	14½	Single
KCPLM-1633	1600	600	OH	3Ø3W	85,000 Amps	5	5	60	38	16½	Single
KCPLM-1634	1600	600	OH	3Ø4W	85,000 Amps	5	5	60	38	16½	Single
KCPLM-2033	2000	600	OH	3Ø3W	85,000 Amps	6	6	66	42	14½	Double
KCPLM-2034	2000	600	OH	3Ø4W	85,000 Amps	6	6	66	42	14½	Double
KCPLM-2533	2500	600	OH	3Ø3W	85,000 Amps	7	7	72	42	20½	Double
KCPLM-2534	2500	600	OH	3Ø4W	85,000 Amps	7	7	72	42	20½	Double
KCPLM-3033	3000	600	OH	3Ø3W	85,000 Amps	8	8	72	42	20½	Double
KCPLM-3034	3000	600	OH	3Ø4W	85,000 Amps	8	8	72	42	20½	Double

Notes

- * - KCPLM-413*, KCPLM-433*, and KCPLM-434*: 400 Amp CT cabinets permitted for fire pump panel applications only. Consult Every prior to ordering.
- Please reach out to your Manufacturers' representative for more information on Milbank's Every-approved combination CT cabinet/disconnect units for services up to 1200A.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



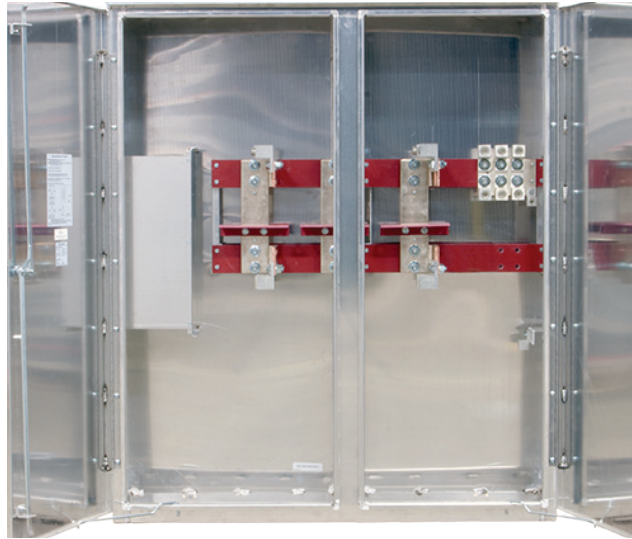

Current Transformer Cabinets | Underground Service Entry | Underground Exit

Catalog Number	Amps	Voltage	Service	Phase	Fault Current Rating	# of Lugs		Dimensions			Hinged Doors
						Line	Load	H"	W"	D"	
KCPL-413UGBX*	400	600	UG	1Ø3W	50,000 Amps	1	1	48	25	15	Single
KCPL-433UGBX*	400	600	UG	3Ø3W	50,000 Amps	1	1	48	25	15	Single
KCPL-434UGBX*	400	600	UG	3Ø4W	50,000 Amps	1	1	48	25	15	Single
KCPLM-813UGBX	800	600	UG	1Ø3W	65,000 Amps	3	3	48	36	14 ¹¹ / ₁₆	Single
KCPLM-833UGBX	800	600	UG	3Ø3W	65,000 Amps	3	3	48	36	14 ¹¹ / ₁₆	Single
KCPLM-834UGBX	800	600	UG	3Ø4W	65,000 Amps	3	3	48	36	14 ¹¹ / ₁₆	Single
KCPLM-1233UGBX	1200	600	UG	3Ø3W	85,000 Amps	4	4	54	45 ³ / ₄	14 ¹¹ / ₁₆	Double
KCPLM-1234UGBX	1200	600	UG	3Ø4W	85,000 Amps	4	4	54	45 ³ / ₄	14 ¹¹ / ₁₆	Double
KCPLM-1633UGBX	1600	600	UG	3Ø3W	85,000 Amps	5	5	66	54	14 ¹¹ / ₁₆	Double
KCPLM-1634UGBX	1600	600	UG	3Ø4W	85,000 Amps	5	5	66	54	14 ¹¹ / ₁₆	Double
KCPLM-2033UGBX	2000	600	UG	3Ø3W	85,000 Amps	6	6	66	54	14 ¹¹ / ₁₆	Double
KCPLM-2034UGBX	2000	600	UG	3Ø4W	85,000 Amps	6	6	66	54	14 ¹¹ / ₁₆	Double
KCPLM-2533UGBX	2500	600	UG	3Ø3W	85,000 Amps	7	7	72	50	20 ¹¹ / ₁₆	Double
KCPLM-2534UGBX	2500	600	UG	3Ø4W	85,000 Amps	7	7	72	50	20 ¹¹ / ₁₆	Double
KCPLM-3033UGBX	3000	600	UG	3Ø3W	85,000 Amps	8	8	72	50	20 ¹¹ / ₁₆	Double
KCPLM-3034UGBX	3000	600	UG	3Ø4W	85,000 Amps	8	8	72	50	20 ¹¹ / ₁₆	Double

Notes

- * - KCPL-413UGBX*, KCPL-433UGBX*, and KCPL-434UGBX*: 400 Amp CT cabinets permitted for fire pump panel applications only. Consult Every prior to ordering.
- Please reach out to your Manufacturers' representative for more information on Milbank's Every-approved combination CT cabinet/disconnect units for services up to 1200A.




Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Current Transformer Cabinets

33

Evergy Approved

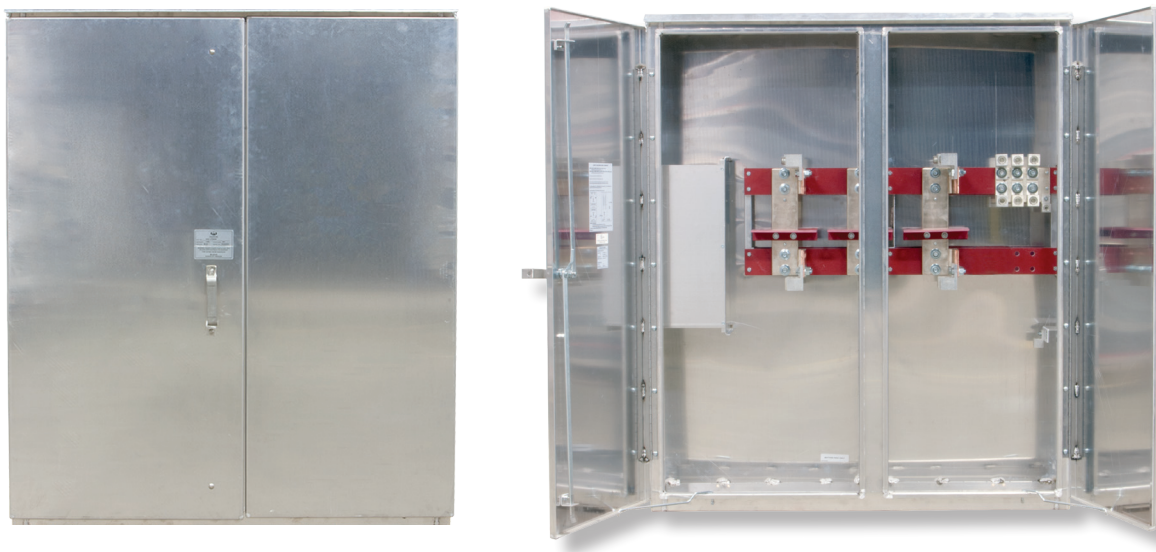

Current Transformer Cabinets | Pad-Mounted


Catalog Number	Amps	Voltage	Service	Phase	Fault Current Rating	# of Lugs		Dimensions			Hinged Doors
						Line	Load	H"	W"	D"	
KCPLM-413PM*	400	600	UG	1Ø3W	50,000 Amps	1	1	58	25	15	Single
KCPLM-433PM*	400	600	UG	3Ø3W	50,000 Amps	1	1	58	25	15	Single
KCPLM-434PM*	400	600	UG	3Ø4W	50,000 Amps	1	1	58	25	15	Single
KCPLM-813PM	800	600	UG	1Ø3W	65,000 Amps	3	3	58	36	14 ¹¹ / ₁₆	Single
KCPLM-833PM	800	600	UG	3Ø3W	65,000 Amps	3	3	58	36	14 ¹¹ / ₁₆	Single
KCPLM-834PM	800	600	UG	3Ø4W	65,000 Amps	3	3	58	36	14 ¹¹ / ₁₆	Single
KCPLM-1233PM	1200	600	UG	3Ø3W	85,000 Amps	4	4	64	45 ³ / ₄	14 ¹¹ / ₁₆	Double
KCPLM-1234PM	1200	600	UG	3Ø4W	85,000 Amps	4	4	64	45 ³ / ₄	14 ¹¹ / ₁₆	Double
KCPLM-1633PM	1600	600	UG	3Ø3W	85,000 Amps	5	5	66	54	14 ¹¹ / ₁₆	Double
KCPLM-1634PM	1600	600	UG	3Ø4W	85,000 Amps	5	5	66	54	14 ¹¹ / ₁₆	Double
KCPLM-2033PM	2000	600	UG	3Ø3W	85,000 Amps	6	6	66	54	14 ¹¹ / ₁₆	Double
KCPLM-2034PM	2000	600	UG	3Ø4W	85,000 Amps	6	6	66	54	14 ¹¹ / ₁₆	Double
KCPLM-2533PM	2500	600	UG	3Ø3W	85,000 Amps	7	7	72	50	20 ¹¹ / ₁₆	Double
KCPLM-2534PM	2500	600	UG	3Ø4W	85,000 Amps	7	7	72	50	20 ¹¹ / ₁₆	Double
KCPLM-3033PM	3000	600	UG	3Ø3W	85,000 Amps	8	8	72	50	20 ¹¹ / ₁₆	Double
KCPLM-3034PM	3000	600	UG	3Ø4W	85,000 Amps	8	8	72	50	20 ¹¹ / ₁₆	Double

Notes


- * - KCPLM-413PM*, KCPLM-433PM*, and KCPLM-434PM*: 400 Amp CT cabinets permitted for fire pump panel applications only. Consult Evergy prior to ordering.
- Please reach out to your Manufacturers' representative for more information on Milbank's Evergy-approved combination CT cabinet/disconnect units for services up to 1200A.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




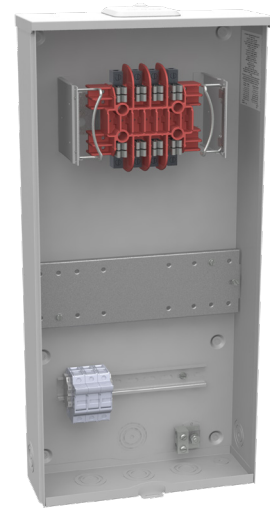


SC6499-XL-IL-21-EVE

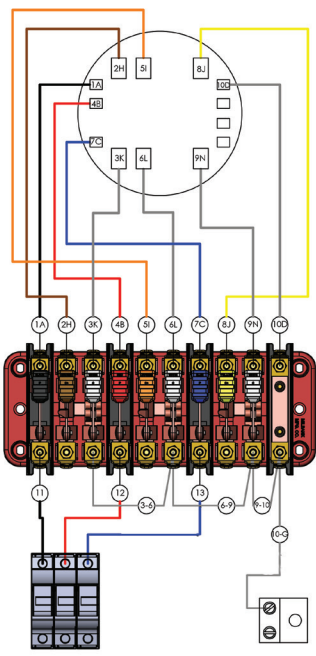

Prewiring Schematic for 6499

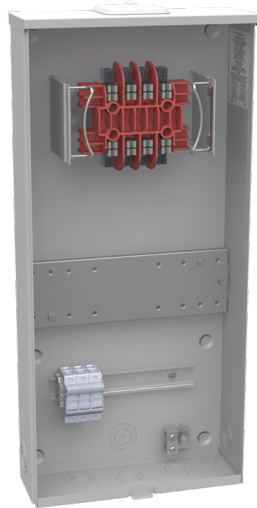

SC6504-XL-IL-21-EVE

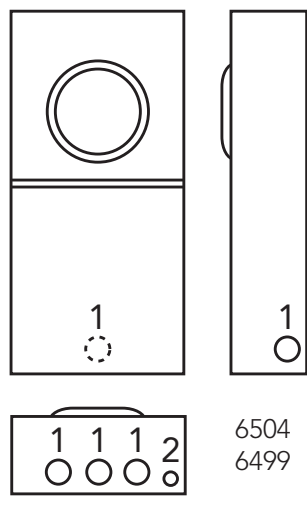

20 Amps | CT Rated Socket with Test Switch Provision

Ringless Catalog Number	Terminals	Service	Hub	Meter Form	Connectors CU	Dimensions			Knockouts	
						D"	W"	H"	1	2
SC6504-XL-IL-21-EVE	8	OH/UG	C.P.	5S	#14-1/0	4 1/8	12	26	1 1/4	1/4, 1/2
SC6499-XL-IL-21-EVE	13	OH/UG	C.P.	9S	#14-1/0	4 1/8	12	26	1 1/4	1/4, 1/2

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the accessories page.
- **Test Switch Cover:** Units on this page can be used with clear lexan cover. See accessories page for ordering information.

CT Rated Cabinets

35

600-800 Amps

Combination Metering Transformer Cabinet and Main Disconnect - 600 Amps

Square D Circuit Breakers - Approved for Bottom Entrance/Top Exit and Top Entrance/Bottom Exit

Catalog Number	CT Amps	Service	Voltage	SCCR	Cabinet Size			Pull-Out Switch		Drawing Number
					D"	W"	H"	Catalog #	Location	
KCPLM-CTMGL12A-613	600	1Ø3W	120/240	65kA	15	25	72	MGL26600	Above CT	20111-801A
KCPLM-CTMGL12A-634	600	3Ø4W	208Y/120	65kA	15	25	72	MGL36600	Above CT	20111-802A
KCPLM-CTMJL14A-634	600	3Ø4W	480Y/277	65kA	15	25	72	MJL36600	Above CT	20111-802B

Square D Circuit Breakers - Approved for Bottom Entrance/Bottom Exit

Catalog Number	CT Amps	Service	Voltage	SCCR	Cabinet Size			Pull-Out Switch		Drawing Number
					D"	W"	H"	Catalog #	Location	
KCPLM-CTMGL12L-613UGBX	600	1Ø3W	120/240	65kA	15	46	54	MGL26600	Left of CT	20111-844A
KCPLM-CTMGL12L-634UGBX	600	3Ø4W	208Y/120	65kA	15	46	54	MGL36600	Left of CT	20111-845A
KCPLM-CTMJL14L-634UGBX	600	3Ø4W	480Y/277	65kA	15	46	54	MJL36600	Left of CT	20111-845B

Square D Circuit Breakers - Approved for Bottom Entrance/Bottom Exit

Catalog Number	CT Amps	Service	Voltage	SCCR	Cabinet Size			Pull-Out Switch		Drawing Number
					D"	W"	H"	Catalog #	Location	
KCPLM-CTMGL12L-613PM	600	1Ø3W	120/240	65kA	15	46	64	MGL26600	Left of CT	20111-870A
KCPLM-CTMGL12L-634PM	600	3Ø4W	208Y/120	65kA	15	46	64	MGL36600	Left of CT	20111-871A
KCPLM-CTMGL14L-634PM	600	3Ø4W	480Y/277	65kA	15	46	64	MJL36600	Left of CT	20111-871B

Notes

- Utility entrance can be reversed for UGBX and PM units by changing the "L" after the 12 or 14 to an "R"

Combination Metering Transformer Cabinet and Main Disconnect - 800 Amps

Square D Circuit Breakers - Approved for Bottom Entrance/Top Exit and Top Entrance/Bottom Exit

Catalog Number	CT Amps	Service	Voltage	SCCR	Cabinet Size			Pull-Out Switch		Drawing Number
					D"	W"	H"	Catalog #	Location	
KCPLM-CTMGL12A-813	800	1Ø3W	120/240	65kA	15	25	72	MGL26800	Above CT	20111-804A
KCPLM-CTMGL12A-834	800	3Ø4W	208Y/120	65kA	15	25	72	MGL36800	Above CT	20111-805A
KCPLM-CTMJL14A-834	800	3Ø4W	480Y/277	65kA	15	25	72	MJL36800	Above CT	20111-805B

Square D Circuit Breakers - Approved for Bottom Entrance/Bottom Exit

Catalog Number	CT Amps	Service	Voltage	SCCR	Cabinet Size			Pull-Out Switch		Drawing Number
					D"	W"	H"	Catalog #	Location	
KCPLM-CTMGL12L-813UGBX	800	1Ø3W	120/240	65kA	15	46	54	MGL26800	Left of CT	20111-847A
KCPLM-CTMGL12L-834UGBX	800	3Ø4W	208Y/120	65kA	15	46	54	MGL36800	Left of CT	20111-848A
KCPLM-CTMJL14L-834UGBX	800	3Ø4W	480Y/277	65kA	15	46	54	MJL36800	Left of CT	20111-848B

Square D Circuit Breakers - Approved for Bottom Entrance/Bottom Exit

Catalog Number	CT Amps	Service	Voltage	SCCR	Cabinet Size			Pull-Out Switch		Drawing Number
					D"	W"	H"	Catalog #	Location	
KCPLM-CTMGL12L-813PM	800	1Ø3W	120/240	65kA	15	46	64	MGL26800	Left of CT	20111-873A
KCPLM-CTMGL12L-834PM	800	3Ø4W	208Y/120	65kA	15	46	64	MGL36800	Left of CT	20111-874B
KCPLM-CTMGL14L-834PM	800	3Ø4W	480Y/277	65kA	15	46	64	MJL36800	Left of CT	20111-874C

Notes

- Utility entrance can be reversed for UGBX and PM units by changing the "L" after the 12 or 14 to an "R"

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



36


Meter Main with Load Center Pedestals

200 Amps | 5 Terminals | Horn Bypass | Ringless | 120/240V


NEC 2020 Compliant



U5136-O-200S-IL-5T9W-EVE

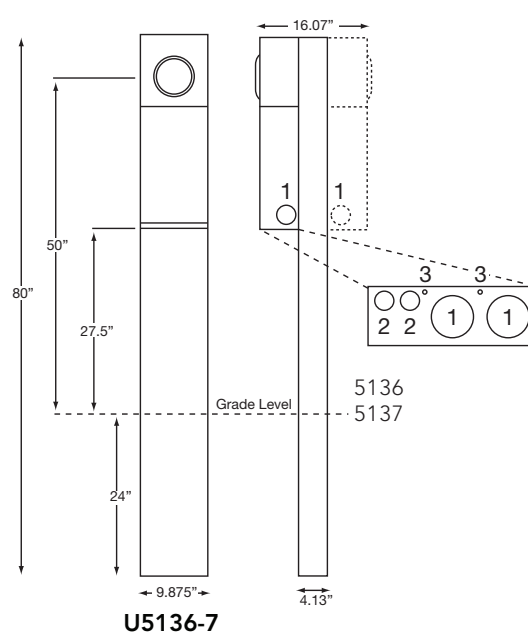

U5136-7

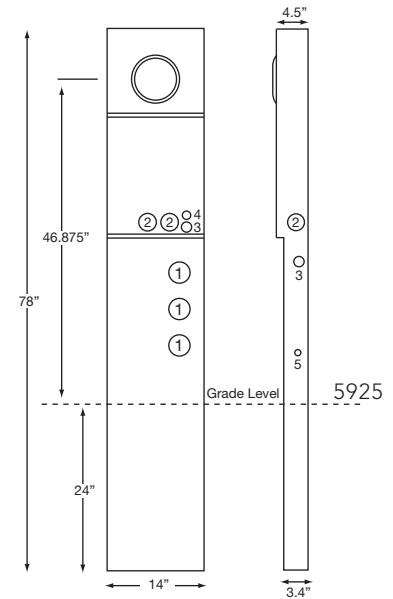

U5925

100-200 Amps | 5 Terminals | Ringless | Horn Bypass | 120/240V | Residential

Catalog Number	Amps	Phase	Load Center	Application	Dimensions			Knockouts		
					D"	W"	H"	1	2	3
U5136-O-100S-IL-5T9W-EVE*	100	1Ø3W	4	UG	4 1/8	9 11/16	80	2	1 1/2, 3/4	1/4
U5136-O-200S-IL-5T9W-EVE*	200	1Ø3W	4	UG	4 1/8	9 11/16	80	2	1 1/2, 3/4	1/4
U5137-O-100S-IL-5T9W-EVE	100 each (double head)	1Ø3W	4	UG	4 1/8	9 11/16	80	2	1 1/2, 3/4	1/4
U5137-O-200S-IL-5T9W-EVE	200 each (double head)	1Ø3W	4	UG	4 1/8	9 11/16	80	2	1 1/2, 3/4	1/4

100-200 Amps | 5 Terminals | Ringless | Horn Bypass | 120/240V | Residential

Catalog Number	Amps	Phase	Load Center	Application	Dimensions			Knockouts				
					D"	W"	H"	1	2	3	4	5
U5925O100KKIL5T9EVE	100	1Ø3W	10	UG	3 7/16	14	78	2 1/2	2	1	3/4	1 1/2
U5925O200KKIL5T9EVE	200	1Ø3W	8	UG	3 7/16	14	78	2 1/2	2	1	3/4	1 1/2

Notes

- **Stabilizer foot:** For field-installable stabilizer foot, order **K5415**.
- **Receptacles:** Consult factory for installed receptacle assemblies.
- **Short circuit current rating:** 22K AIC. However, this rating is limited to the lowest interrupting capacity of any circuit breaker installed. Watthour meter not included in SCCR.
- **Receptacle bridge:** Order separately, part **K5400-BRIDGE-2POS**.
- **Extension:** For 18-inch stake wireway extension for **U5925** pedestals, order **K6417**.
- **Bypass:** The horn-type bypass is factory-installed. This permits changing and testing of the meter without interrupting customer service when used with utility-supplied jumpers.

*Pad-mount version also available as **U5138-O-(AMP)S-IL-5T9W-EVE**.



Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Meter Main with Load Center Pedestals

37


100-200 Amps | 5 Terminals | Ringless | 120/240V

NEC 2020 Compliant



U6220O200KKIL5T9WEVE

*Up to three receptacles can be factory installed.
Consult Milbank to have receptacles installed.

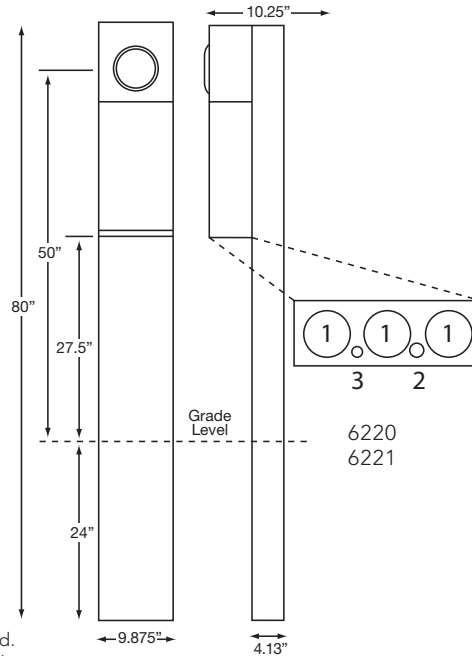

Breaker Chart

Rating kAIC	Circuit Breakers 125 Amps
10	Siemens: QP. Cutler Hammer: BR, HQP, QPGF Square D/Homeline: GE (50 Amps max) THQL, THQL-GF
22	Siemens: QPH
Rating kAIC	150-200 Amps
10	Siemens: QN
22	Siemens: QNH

100-200 Amps | 5 Terminals | Horn Bypass | 120/240V | Residential

Catalog Number	Amps	Phase	Load Center	Application	Dimensions			AIC
					D"	W"	H"	
U6220O100KKIL5T9WEVE	100	1Ø3W	10	UG	4 1/8	9 11/16	80	22K
U6220O200KKIL5T9WEVE	200	1Ø3W	8	UG	4 1/8	9 11/16	80	22K

100-200 Amps | 5 Terminals | Heavy Duty Lever Bypass | 120/240V | Commercial


Catalog Number	Amps	Phase	Load Center	Application	Dimensions			AIC
					D"	W"	H"	
U6221-O-100-IL-5T9W-EVE	100	1Ø3W	10	UG	4 3/4	9 11/16	80	22K
U6221-O-200-IL-5T9W-EVE	200	1Ø3W	8	UG	4 3/4	9 11/16	80	22K

Notes

- **Stabilizer foot:** For field-installable stabilizer foot, order **K5415**.
- **Receptacles:** Factory installation available, contact your local Manufacturers' Representative for more information.
- **Pad-mount:** For Pad-mount version contact your local Manufacturers' Representative for more information.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



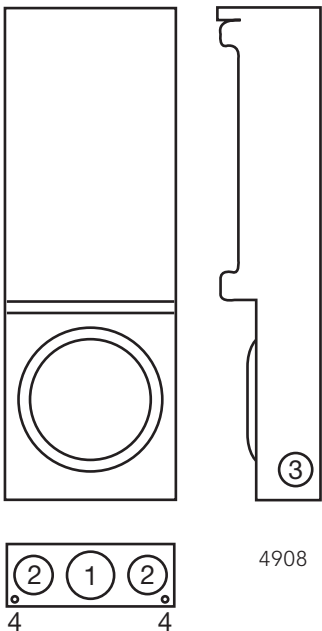

U4908-O-11GB-KCPL

125 Amps | 4 Terminals | Ringless

Catalog Number	Service	Hub	Phase	Connectors CU/AL		Dimensions			Knockouts			
				Line	Load	D"	W"	H"	1	2	3	4
U4908-O-11GB-KCPL*	UG	Blank	1Ø3W	#6-2/0	#6-2/0	5 ³ / ₁₆	9	25 ¹⁵ / ₁₆	2	1 ¹ / ₂	1 ¹ / ₄	1 ¹ / ₄

Notes

- **Interior:** Six-circuit plated-copper interior accepts standard plug-in type circuit breakers.
 - **Receptacle bridge:** Three position self-grounded receptacle bridge accepts most standard NEMA receptacles with mounting plates.
- *Includes two, 20 Amps duplex receptacles with ground fault circuit breakers.



Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Multi-Position Tap Box

39

Three Phase | Aluminum Construction | Wall- or Pad-Mountable



Features

- **Safe and Secure**
 - Padlockable, three-point latching mechanism comes standard with all units.
 - Optional (factory-installed) penta-bolt locking mechanism to further protect against power theft.
- **Easy Installation**
 - Wall- or pad-mount installation options.
 - Stainless steel hardware kit included for pad-mount installation.
 - Lightweight aluminum enclosure.
 - Select models have a smaller footprint; ideal for applications with limited space.
- **NEMA 3R Rated**
- **Aluminum powder-coated**
- **Multi-port ground lugs**



If a penta-bolt locking cover is required, call your local Manufacturers Representative.


Terminals Boxes

Catalog Number	Phase	Position Lugs	Maximum Wire Size	Maximum Amperage	Dimensions		
					D"	W"	H"
UAP6094-O	3	16	500 kcmil	3000 Amps	16	25 ⁵ / ₈	43
UAP6095-O	3	22	500 kcmil	4000 Amps	16	32 ³ / ₈	43
UAP6096-O	3	14	750 kcmil	3300 Amps	16	25 ¹⁵ / ₁₆	51

Stainless steel pad-mount spacing brackets included.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



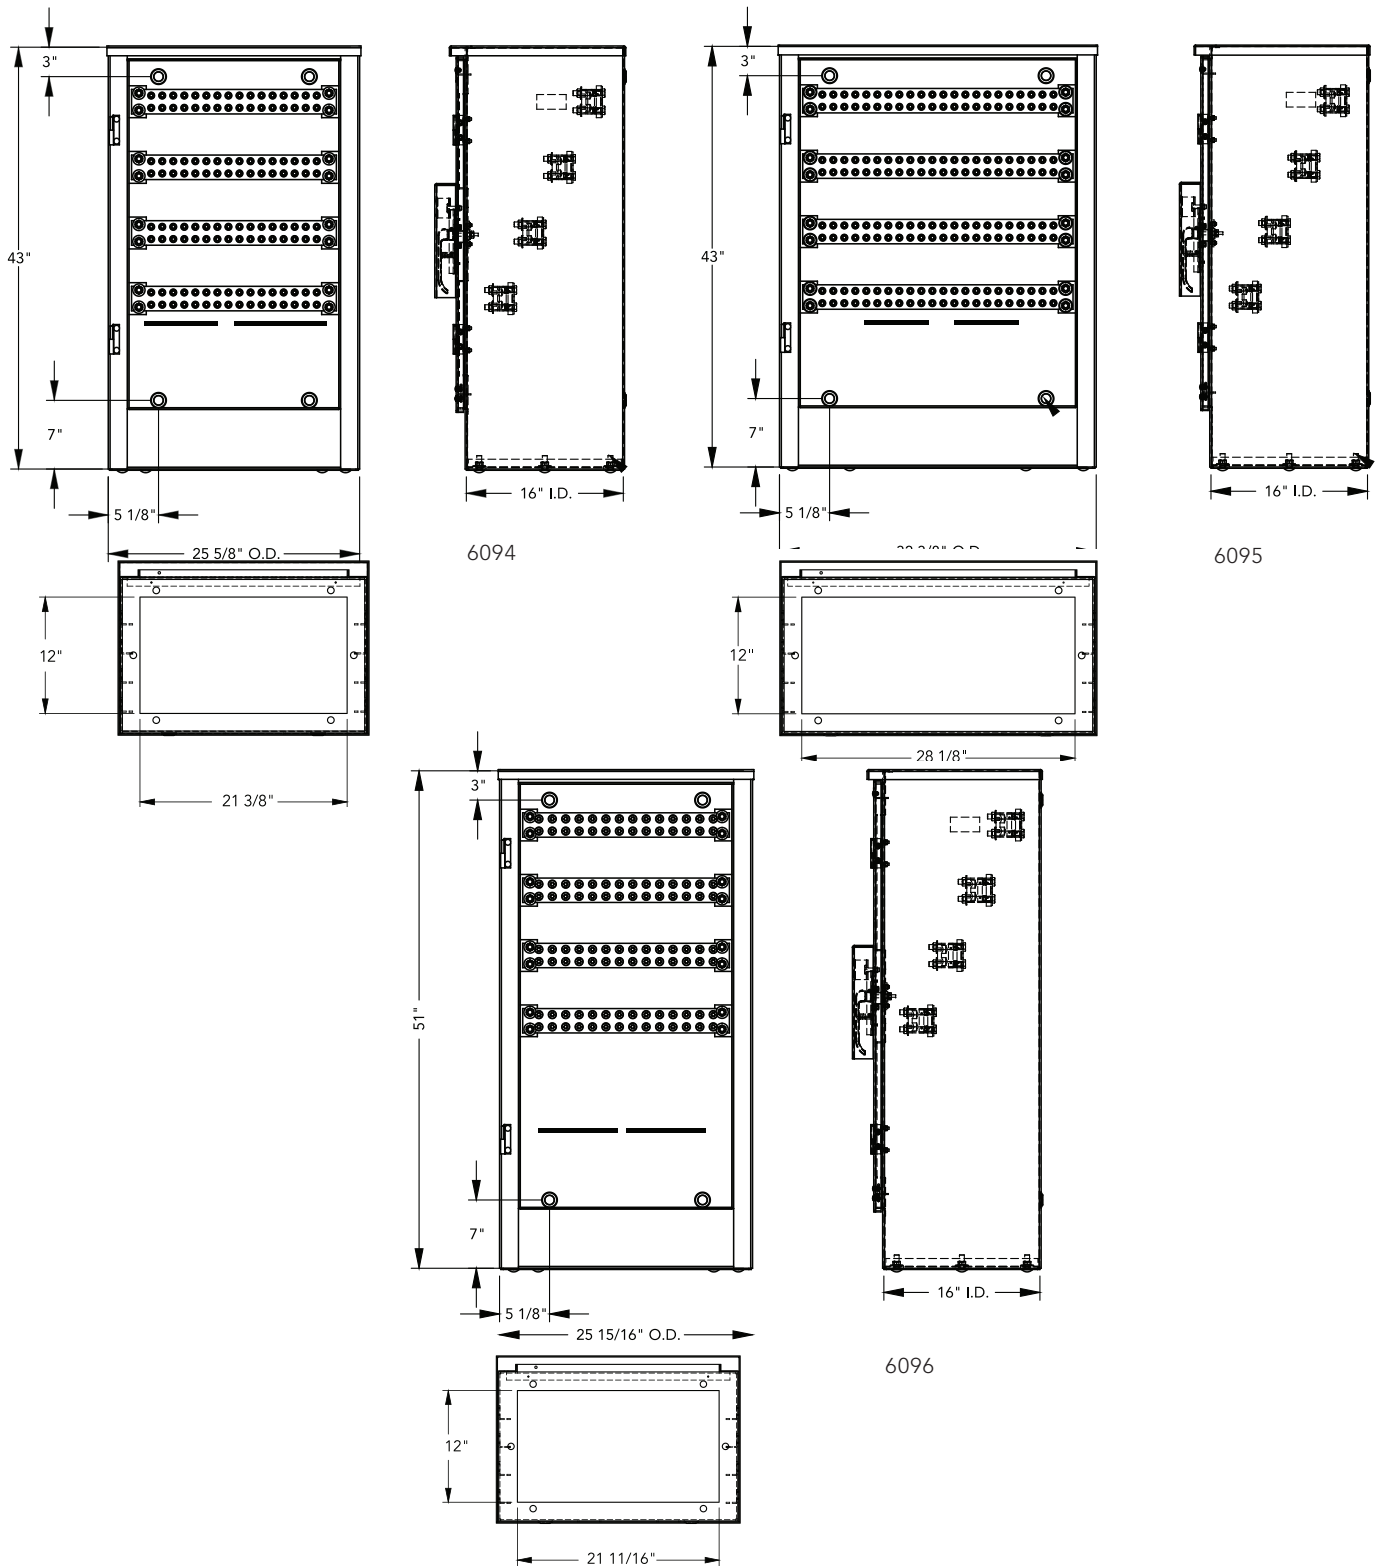

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Surface-Mount RV and Power Outlets

41


Millennium Series | 120/240V | *See Disclaimer Before Ordering*



U5000-XL-75

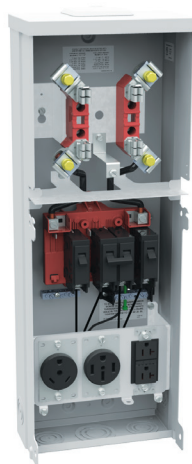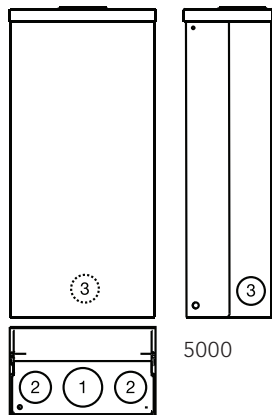

U5100-XL-75

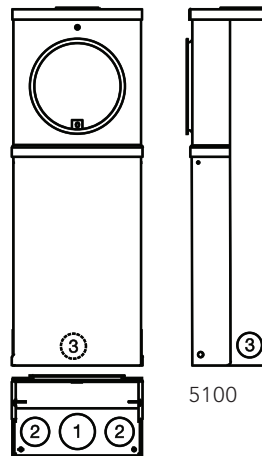

125 Amps | 120/240V | Surface-Mount Power Outlets

Catalog Number	Metered/Unmetered	Receptacle Configuration	Circuit Breaker Configuration	Loop Feed	Connectors Line	Dimensions			Knockouts		
						D"	W"	H"	1	2	3
U5000-XL	Unmetered	—	—	Yes	(2) 1/0-#12	5½	9⅛	19¼	2	1½	1¼
U5000-XL-41	Unmetered	A	X	Yes	(2) 1/0-#12	5½	9⅛	19¼	2	1½	1¼
U5000-XL-55	Unmetered	B	Y	Yes	(2) 1/0-#12	5½	9⅛	19¼	2	1½	1¼
U5000-XL-75	Unmetered	C	Z	Yes	(2) 1/0-#12	5½	9⅛	19¼	2	1½	1¼
U5100-XL	Metered	—	—	No	#6-250	5½	9⅛	25	2	1½	1¼
U5100-XL-41	Metered	A	X	No	#6-250	5½	9⅛	25	2	1½	1¼
U5100-XL-55	Metered	B	Y	No	#6-250	5½	9⅛	25	2	1½	1¼
U5100-XL-75	Metered	C	Z	No	#6-250	5½	9⅛	25	2	1½	1¼

Receptacle Configurations

A	B	C
(1) TT30R, (1) 5-20R GFI	(1) 14-50R, (1) 5-20R GFI	(1) 14-50R, (1) TT30R, (1) 5-20R GFI

See Before Ordering:

NOTE
These units are typically used for submetering applications.
Contact factory for additional configurations not shown here.


Circuit Breaker Configurations

X	Y	Z
(1) 30A, 1P, 120V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 30A, 1P, 120V (1) 20A, 1P, 120V

DISCLAIMER
Not meant for Every metered installations.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



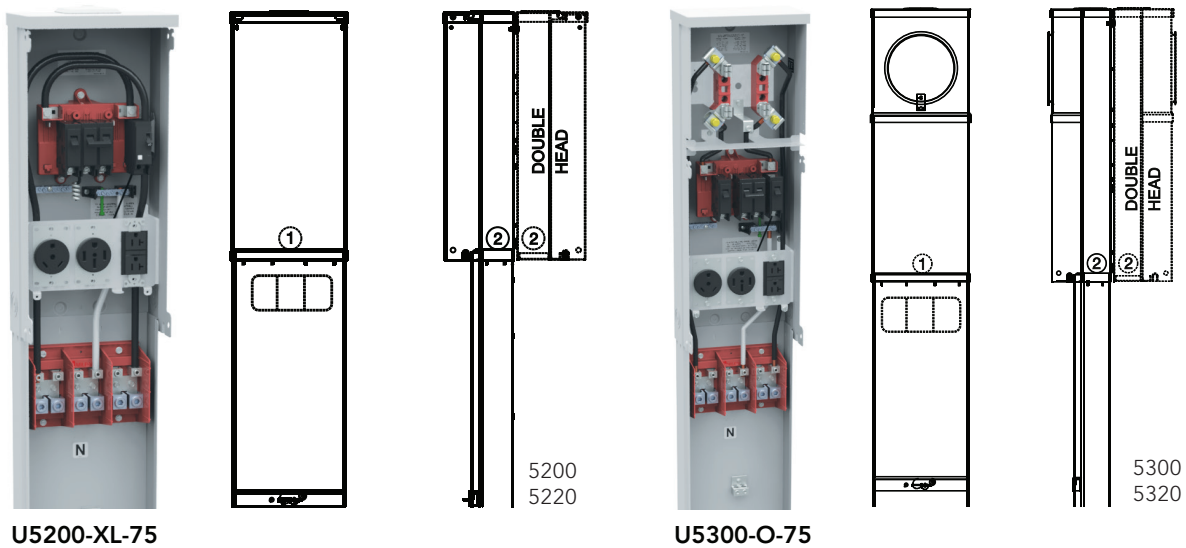

125 Amps | 120/240V | Power Outlet Pedestals

Catalog Number	Double Head Catalog Number	Metered/Unmetered	Receptacle Configuration	Circuit Breaker Configuration	Dimensions			Mounting Type
					D"	W"	H"	
U5200-XL	U5220-XL	Unmetered	—	—	5 ⁹ / ₁₆	9 ¹ / ₈	64 ¹ / ₂	Direct Burial
U5200-XL-41	U5220-XL-41	Unmetered	A	X	5 ⁹ / ₁₆	9 ¹ / ₈	64 ¹ / ₂	Direct Burial
U5200-XL-55	U5220-XL-55	Unmetered	B	Y	5 ⁹ / ₁₆	9 ¹ / ₈	64 ¹ / ₂	Direct Burial
U5200-XL-75	U5220-XL-75	Unmetered	C	Z	5 ⁹ / ₁₆	9 ¹ / ₈	64 ¹ / ₂	Direct Burial
U5300-O	U5320-O	Metered	—	—	5 ⁹ / ₁₆	9 ¹ / ₈	70 ¹ / ₄	Direct Burial
U5300-O-41	U5320-O-41	Metered	A	X	5 ⁹ / ₁₆	9 ¹ / ₈	70 ¹ / ₄	Direct Burial
U5300-O-55	U5320-O-55	Metered	B	Y	5 ⁹ / ₁₆	9 ¹ / ₈	70 ¹ / ₄	Direct Burial
U5300-O-75	U5320-O-75	Metered	C	Z	5 ⁹ / ₁₆	9 ¹ / ₈	70 ¹ / ₄	Direct Burial

Receptacle Configurations

A	B	C
(1) TT30R, (1) 5-20R GFI	(1) 14-50R, (1) 5-20R GFI	(1) 14-50R, (1) TT30R, (1) 5-20R GFI

Circuit Breaker Configurations

X	Y	Z
(1) 30A, 1P, 120V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 30A, 1P, 120V (1) 20A, 1P, 120V

See Before Ordering:

NOTE

These units are typically used for submetering applications.

Contact factory for additional configurations not shown here.

DISCLAIMER

Not meant for Every metered installations.








Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Replacement Receptacle Plates

43

For Millennium Series RV Products


		
K5920-75	K5920-10GR	K5920-54
		
K5920-11GR	K5920-522	K5920-41
		
K5920-58	K5920-111GR	K5920-BLANK
		
K5920-38		

Consult factory for application details.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Internal Light Kits for Metered Power Outlets (U5100 and U5300)

Application	Internal light kit for metered power outlets.	
LED Features	Includes new LED light, lamp shield and opaque hinge cover lens. Factory wired to 20 Amps GFI circuit. May be wired to separate 20 Amps circuit breaker. Order Q120 separately. Cover on metered power outlet is 15¼" in height.	
Ordering	Order with -LD suffix (after catalog number) for factory-installed. Order catalog number K6213 for field-installed.	
Application	Internal light kit for metered power outlets.	
Fluorescent Features	Includes five-watt fluorescent lamp socket, ballast, lamp shield and opaque hinge cover lens. Factory-wired to 20 Amps GFI circuit. May be wired to separate 20 Amps circuit breaker. Order Q120 separately. Cover on metered power outlet is 15¼" in height.	
Ordering	Order with -L suffix (after catalog number) for factory-installed. Order catalog number K5412 for field-installed.	

Photoelectric Light Control Kit

Application	Photoelectric light control kit for K5412 light kits.	
Features	2.5 Amps, 120V photo electrical control wired in series with K5412 light kits.	
Ordering	Order with -LPC suffix for factory-installed light and PE control. Order catalog number K5413 for field-installed.	

WARNING!

Always disconnect power prior to installing these devices.



Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Telecom and Pedestal Accessories

45


For Millennium Series Products

Telephone and Cable TV Kit

Application	Mounts to rear of pedestal series U5200 and U5300 . May also be adaptable to a wooden or similar structure.	 K4709-02-3R K4709-02
Features	Single: 16" galvanized raceway, (1) RJ11 telephone jack and (1) Type F coaxial CATV jack. Dual: 16" galvanized raceway, (2) RJ11 telephone jacks and (1) Type F coaxial CATV jack. Includes mounting hardware and instructions.	
Ordering	Single line telephone and cable TV kit order K4709-02 .	
Note	Confirm acceptability with cable TV and telephone provider before ordering or installing these devices.	

Water Shroud with Hardware


Application	Used to cover water pipe and provide means to mount hose bib to rear of pedestal.	 K4709-WS
Features	Includes mounting hardware and instructions. Matches K4709 kits when mounted side-by-side.	
Ordering	Order catalog number K4709-WS .	

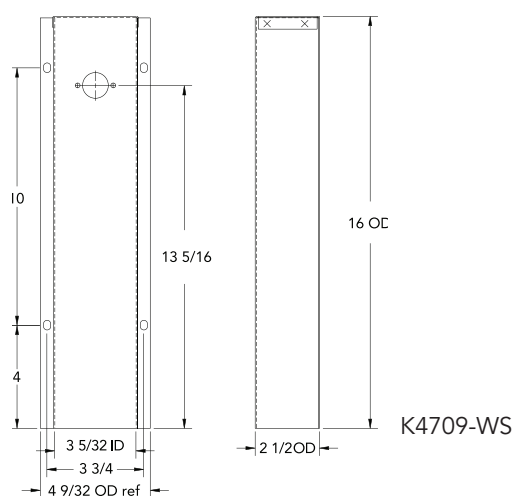


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




Field-Installed Pad-Mount Kit

Application	Field-installed pad-mount kit with (6) ¾" mounting holes.	
Features	Includes ¼-20 stainless steel hardware to attach pad-mount base to post. Anchor bolt kit sold separately (order catalog number K5421).	
Ordering	Order catalog number K5410 .	

Stabilizer Foot with Hardware

Application	Stabilizes direct burial-type posts in unstable soil conditions.	
Features	Includes ¼-20 hardware to attach to U5200 and U5300 pedestals.	
Ordering	Order catalog number K5415 .	

Anchor Bolt Kit

Application	Concrete anchor bolt kit designed to attach pad-mount base to concrete.	
Features	(Four) sets of zinc-plated ⅝-11 x 10" bolts with 2" toe. Includes nut and flat washer.	
Ordering	Order catalog number K5421 .	

Metering and Receptacle Accessories

47

For Millennium Series Products

Field-Installed Meter Kits

Application	Field-installed meter kit for U5000 and U5200 power outlets.	 K4800 - Digital
Features	100 Amps cast meter socket, CL-200D E-Z Read Meter, sealing ring, security seal, 1" Milbank hub, nipple and mounting screws. See CL200-D for Watthour meter specification.	
Ordering	Order catalog number or K4800-D digital meter kit.	

E-Z Read Watthour Meter

Application	200 Amps E-Z read watthour meter designed to be field-installed on the U5100 and U5300 metered power outlets.	 CL200-D - Digital
Features	200 Amps form 2S 120/240V. Numeric readout in full kilowatt increments. No "tenths" dial; digital readout option available. Remanufactured within 1% accuracy.	
Ordering	Order catalog number CL200-D .	

Single Receptacle Only Power Outlet





Application	Overhead/underground power outlet receptacle, suitable for RV, temporary service, campground, marina and boatyard equipment.			 P-10GWR
Features	Type 3R, 120/240V single phase. Lockable cover. Breaker not included (in receptacle box).			
Ordering	Order catalog number from chart below.			
Receptacle Options	 P-10GWR 20A 5-20GR 120V GFI	 P-13WR 30A TT-30R 120V	 P-54WR 50A 14-50R 120/240V	

WARNING!

Always disconnect power prior to installing these devices.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



			
Q120 20 Amps, 1 pole circuit breaker	708784-MO 20 Amps, 1 pole GFI circuit breaker	Q130 30 Amps, 1 pole circuit breaker	Q250 50 Amps, 2 pole circuit breaker
			
Z918466-AC Lug landing base	Z917602-AC Circuit breaker base (6-circuit)	Z915141-AC Left or right meter block assembly	Z1002769 Ground assembly for unmetered version
			
Z918449-AC (19" unmetered) Z918447-AC (15" metered) Hinge cover	Z818052-SC (19" unmetered) Z818480-SC (15" metered) Deadfront	MR-2 Snap action sealing ring	
			
Z708080-MO 20 Amps GFI receptacle NEMA 5-20GR	Z701776-MO 30 Amps receptacle NEMA TT-30	Z708767-MO 50 Amps receptacle NEMA 14-50R	



Unmetered Load Centers

200 Amps | 120/240V

49



U5971-XL-200

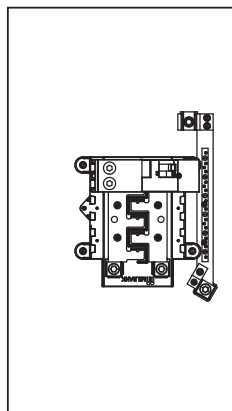

5971

Breaker Chart

Rating kAIC	Circuit Breakers 125 Amps
10	Siemens: QP. Cutler Hammer: BR, HQP, QPGF Square D/Homeline: GE (50 Amps max) THQL, THQL-GF
Rating kAIC	150-200 Amps
10	Siemens: QN

100-200 Amps | 120/240V | Unmetered Load Center with Main Breaker

Catalog Number	Main Breaker Amps	Circuits	Service	Hub	Dimensions			Knockouts				
					D"	W"	H"	1	2	3	4	5
U5971-XL-100	100	10	OH/UG	C.P.	4 1/2	14 1/8	25 1/16	3	2	1	1/2, 3/4	1/4, 1/2
U5971-XL-150	150	8	OH/UG	C.P.	4 1/2	14 1/8	25 1/16	3	2	1	1/2, 3/4	1/4, 1/2
U5971-XL-200	200	8	OH/UG	C.P.	4 1/2	14 1/8	25 1/16	3	2	1	1/2, 3/4	1/4, 1/2

Notes


- **AIC rating:** These units are rated 10K AIC.
- **Breaker interlock:** U5971 accepts breaker interlock kits. Order **K5815** for large QN with small frame Q, **K5820** for large frame QN with large frame QN or **K5830** for small frame Q.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.






U6064-XTL-200-200

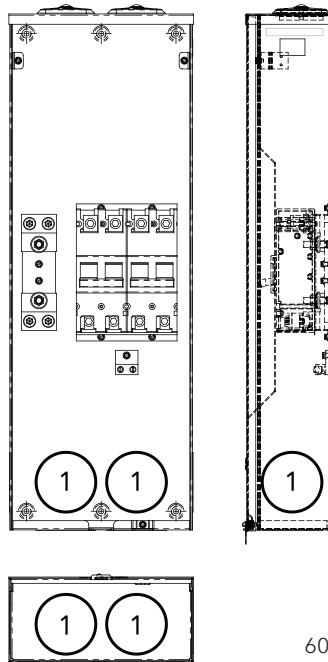

6064

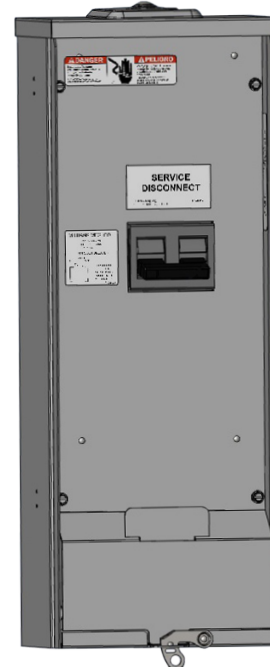

U4569-XL-100

Specifications

- 120/240V, 1Ø applications
- UL-listed
- Available for two **UQFB** style breakers in any combo of 100, 150, 200 Amps
- 10K AIC rated
- Removable front cover and deadfront
- Type 3R 16-gauge G90 galvanized steel shell
- Light gray polyester powder coat finish

100-200 Amps | Breaker Enclosures | 120/240V | 1Ø

Catalog Number	Service	Hub	Dimensions			Knockouts
			D"	W"	H"	1
U6064-XTL-100-100	OH	(2) C.P.	4 27/32	11	31	3
U6064-XTL-150-150	OH	(2) C.P.	4 27/32	11	31	3
U6064-XTL-200-200	OH	(2) C.P.	4 27/32	11	31	3

100-200 Amps | Circuit Breakers

10K AIC Bolt-On	Amps	Wire Range	
		CU	AL
UQFB-100	100	#3-#1	#1-1/0
UQFB-150	150	1/0-300	2/0-300
UQFB-200	200	1/0-300	2/0-300

100-200 Amps | Breaker Enclosures | 120/240V | 1Ø

Catalog Number	Service	Hub	Dimensions			Knockouts
			D"	W"	H"	1
U4569-XL-100	OH	CP	4 27/32	11	31	3
U4569-XL-150	OH	CP	4 27/32	11	31	3
U4569-XL-200	OH	CP	4 27/32	11	31	3

Notes

- **Application:** To be used in conjunction with 320 Amps, single phase meter sockets or when the utility requires a separate enclosure for the meter socket and main breaker.



Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Circuit Breakers

51

UQFP Plug-In and UQFB Bolt-On Series | 120/240V



UQFP
UQFPH



UQFP-M
UQFPH-M



UQFB-X1



UQFBH

100-200 Amps Frame | 120/240V | Plug-In | 10K AIC and 22K AIC | 2-Pole - Common Trip

Amps	10K AIC Plug-In	22K AIC Plug-In	10K AIC Plug-In	22K AIC Plug-In	Wire Range	
					CU	AL
100	UQFP-100	UQFPH-100	UQFP-M-100	UQFPH-M-100	#3-#1	#1-1/0
125	UQFP-125	UQFPH-125	UQFP-M-125	UQFPH-M-125	#3-#1	#1-1/0
150	UQFP-150	UQFPH-150	UQFP-M-150	UQFPH-M-150	1/0-300	2/0-300
200	UQFP-200	UQFPH-200	UQFP-M-200	UQFPH-M-200	1/0-300	2/0-300

100-200 Amps Frame | 120/240V | Bolt-On | 10K AIC and 22K AIC | 2-Pole - Common Trip



Amps	10K AIC Bolt-On	22K AIC Bolt-On	10K AIC Bolt-On	22K AIC Bolt-On	Wire Range	
					CU	AL
100	UQFB-100	UQFBH-100	UQFB-100-X1	UQFBH-M-100	#3-#1	#1-1/0
125	UQFB-125	UQFBH-125	UQFB-125-X1	UQFBH-M-125	#3-#1	#1-1/0
150	UQFB-150	UQFBH-150	UQFB-150-X1	UQFBH-M-150	1/0-300	2/0-300
200	UQFB-200	UQFBH-200	UQFB-200-X1	UQFBH-M-200	1/0-300	2/0-300

Notes

- **UL-listed:** For use with 60°C or 75°C wire.
- **UQFP:** For parallel main circuit breaker applications.
- **UQFP-M:** For series main circuit breaker applications Split load tab features allow for feed-through capability.
- **UQFB:** (Two) 1/0-300 lugs provided on load and line side (cable-in, cable-out).
- **UQFB3:** Three-pole available. Consult factory.
- **UQFB-X:** (Two) 1/0-300 lugs provided on load side and (two) line bar bus connections on line side.
- **UQFB-M:** For series main circuit breaker applications. Split load tab features allow for feed-through capability.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



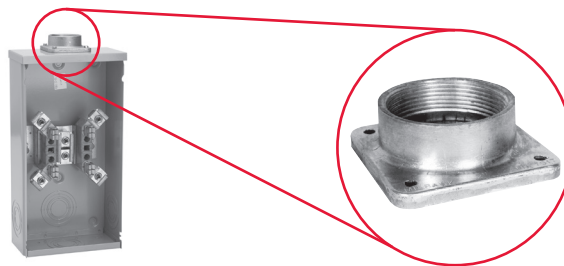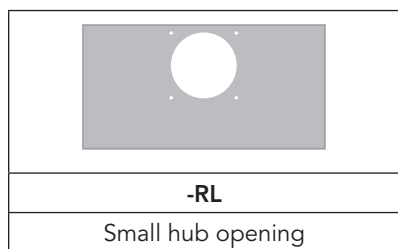

-WL A7514	-YL A7515	-ZL A7516	-DL A7517	-EL A7518	-XL A7551
1" hub	1 1/4" hub	1 1/2" hub	2" hub	2 1/2" hub	Small closing plate

-R
Large hub opening

-F A8110	-G A8111	-H A8112	-X A9064	-RRL S8324	-RXL S8324 A7551
3" hub	3 1/2" hub	4" hub	Large closing plate	Large hub opening adapted to small hub opening	Large hub opening adapted to small closing plate

Notes

- **Suffix:** Add to catalog number for factory installation of hub.
- **Packaging:** Individually packed units for field installation.
- **Abbreviations:** H.O. (hub opening), C.P. (closing plate).



Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Connector Kits and Closing Kits

Connector Kits — For Use with 3/8"-16 Stud Type Units Only

					
Single			Twin		
Suffix	Part #	(3 per set) - 1Ø	Suffix	Part #	(3 per set) - 1Ø
K1	K1539	6-350	K2	K1350	6-350
K3	K1540	4-600 or (2) 1/0-250*	K2L	K1350L	6-350 (non-rotating)
K3L	K1540L	4-600 or (2) 1/0-250* (non-rotating)	K4	K1541	4-600
Suffix	Part #	(4 per set) - 3Ø	Suffix	Part #	(4 per set) - 3Ø
K5	K3082	6-350	K6	K3442	6-350
K7	K3441	4-600 or (2) 1/0-250*	K8	K3083	4-600

*For (two) 1/0-250, conductors must be of same size.


ANSI-61-Gray


A-GP
12 oz. spray can of gray paint


Closing Covers

	
Meter Closing Plate (Ring-type/Ringless)	Metal Closing Plate (For Ringless Sockets)
6003 - Gray Plastic	CP-21
6116 - Clear Plastic	
6002 - Clear Plastic	

Load Side Tap Connector


K4977-INT - Interior Load Tap Connector

Disconnect Sleeve


M5-144
Do not use with lever bypass sockets

Bypass Link


K8180 (sold in pairs)

Main Lug Kit


K3701 - Wire range #2-300


Note

Consult factory for proper connector kits for studded meter sockets.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



All kits include isolating blocks and hardware to be installed under existing neutral bar.

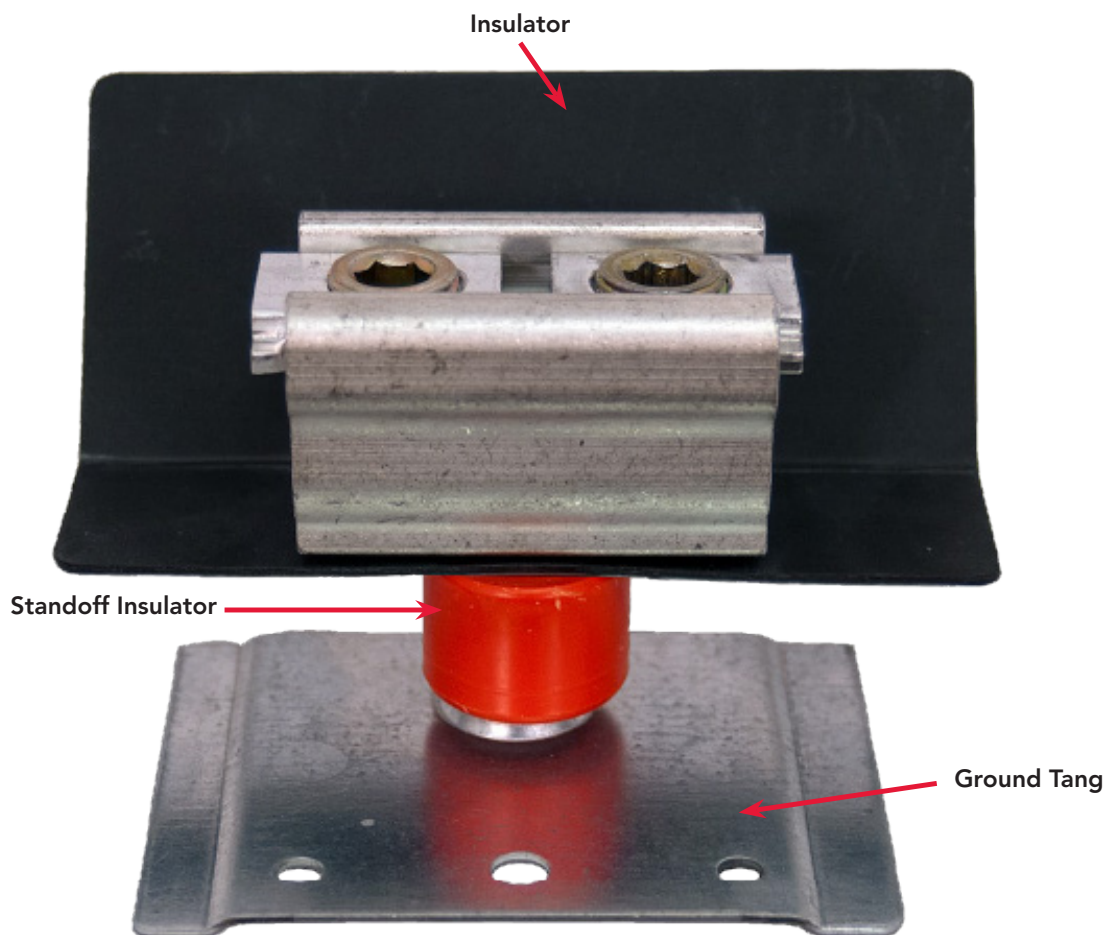


K1047

Isolated Neutral Kits

55

All kits include isolating blocks and hardware to be installed under existing neutral bar.

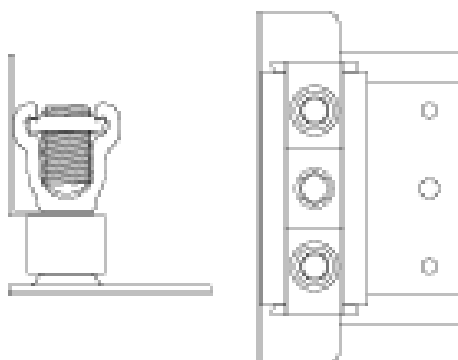


K1047

K1047

200 Amps

For use with the following series:

9701





K5977

K5977

320 Amps

For use with the following series:

2448, 4013




K5979

K5979

320 Amps

For use with the following series:

4702




Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Fifth Terminals, Isolated Neutrals and Anti-Inversion Clip

Fifth Terminals

	
K5T - 200 Amps (Block with square hole)	K3865 - Heavy duty jaw clamping (K3866 without neutral wire)

*Consult factory for correct fifth terminal.

Isolated Neutral Kit



K1047*

Anti-Inversion Clip



K4802

*Isolated neutrals are specific to the meter socket. Consult factory for correct isolated neutral.

Triplex Ground


K1190 (For factory-installed triplex ground, add suffix -TG to catalog number)


Pole Hanger Kit
850 comes with four pole hangers

	
Catalog Number	Description of Pole Hanger Brackets
830	One Pair (two pieces) with mounting hardware
850	Two pair (4 pieces) with mounting hardware




Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

100 Amps Blocks (Single Sockets Only)

	
BL7474 - Block assembly	
BL7499 - Horn bypass block assembly	
Z904486-AO - Slotted nut assembly	
Z903274-AO - Horn bypass nut assembly	
Z802965-AC - Neutral without nut	
Z901925-AC - Hex nut set screw	

200 Amps Blocks (Single Sockets Only)

	
K4527 - Internal hex block assembly (with meter support)	
K4528 - External hex block assembly (with meter support)	
K4529 - Internal hex horn bypass block assembly with meter support)	
K4530 - External hex horn bypass block assembly (with meter support)	
Z916265-AO - Internal nut assembly	
Z916264-AO - External nut assembly	
Z814898-AC - Neutral without nut	

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



DIAGRAM A
1Ø2W with 1 P.T. and 1 C.T.
Single Stator Meter (2W1Ø) - Form 3S
5T Socket, Test Switch #TS04-0101

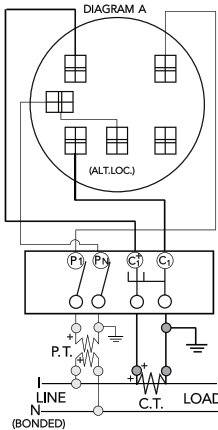


DIAGRAM B
1Ø3W with 1 C.T.
Single Stator Meter (2W1Ø) - Form 4S
5T Socket, Test Switch #TS04-0101

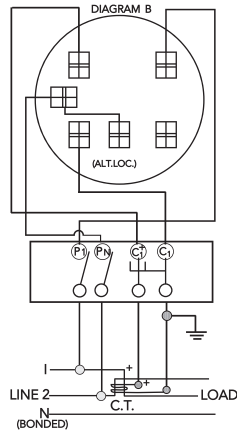


DIAGRAM C
1Ø3W with 2 C.T.'s
Single Stator Meter (3W1Ø) - Form 4S
6T Socket, Test Switch #TS07-0105

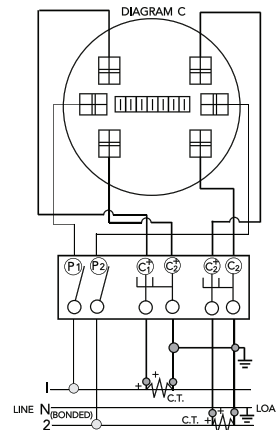


DIAGRAM D
1Ø3W or 3W Network with 2 C.T.'s
2 Stator Meter - Form 5S
8T Socket, Test Switch #TS07-0105

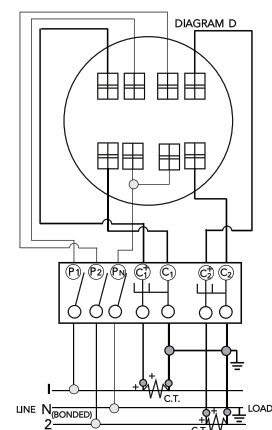


DIAGRAM E
3Ø3W "Δ" with 2 P.T.'s and 2 C.T.'s
2 Stator Meter - Form 5S
8T Socket, Test Switch #TS07-0105

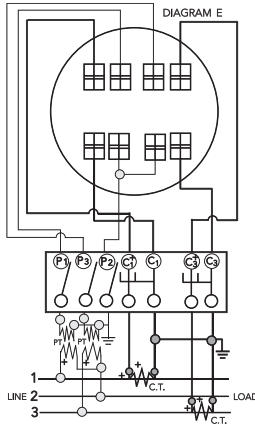


DIAGRAM F
3Ø3W "Δ" with 2 C.T.'s
2 Stator Meter - Form 5S
8T Socket, Test Switch #TS07-0105

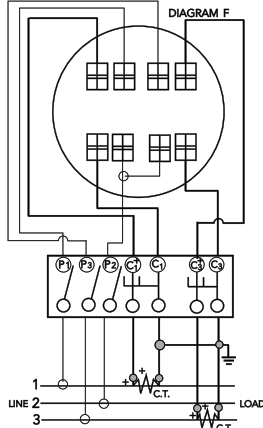


DIAGRAM G
3Ø4W "Y" with 3 C.T.'s
2 1/2 Stator Meter - Form 6S
13T Socket, Test Switch #TS10-0109

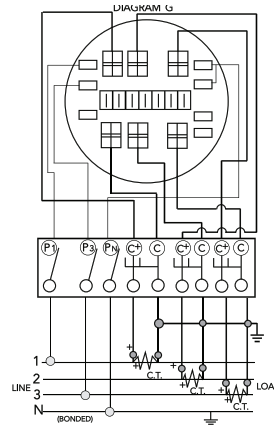


DIAGRAM H
3Ø4W "Y" with 2 P.T.'s and 3 C.T.'s
2 1/2 Stator Meter - Form 6S
13T Socket, Test Switch #TS10-0109

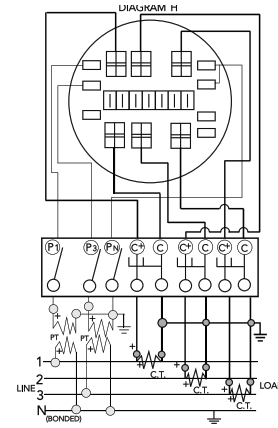


DIAGRAM I
3Ø4W "Y" or "Δ" with 3 C.T.'s
"Y" 3 Stator Meter - Form 9S
"Δ" 2 Stator Meter - Form 8S
13T Socket, Test Switch #TS10-0109


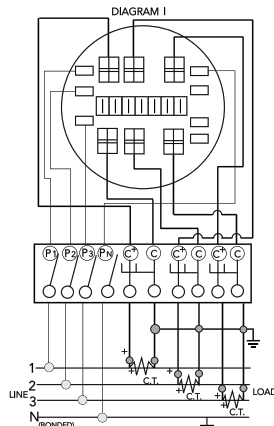


DIAGRAM J
3Ø4W "Y" with 3 P.T.'s and 3 C.T.'s
3 Stator Meter - Form 9S
13T Socket, Test Switch #TS10-0109

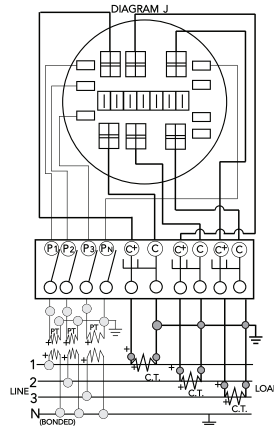

Prewiring

If standard factory prewiring is required, refer to wiring diagrams on this page. Determine appropriate diagram and send a copy with order. If custom factory prewiring is required, specify on order. Be sure to include meter socket catalog number, test switch make and catalog number, meter form number and provide a copy of your wiring diagram.

Conduit, Ampacity and SCCR

59

Reference Information

MAXIMUM NUMBER OF CONDUCTORS IN CONDUIT

Table from 2008 NEC Code Reference: Rigid Metal Conduit

Type	Conductor Size (AWG/kcmil)	Conduit Trade Sizes (Inches)									
		1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4
THHN, THWN, THWN-2	12	9	16	26	46	62	102	146	225	301	387
	10	6	10	17	29	39	64	92	142	189	244
	8	3	6	9	16	22	37	53	82	109	140
	6	2	4	4	12	16	27	38	59	79	101
	4	1	2	4	7	10	16	23	36	48	62
	3	1	1	3	6	8	14	20	31	41	53
	2	1	1	3	5	7	11	19	26	34	44
	1	1	1	1	4	5	8	12	19	25	35
	1/0	1	1	1	3	4	7	10	16	21	27
	2/0	0	1	1	2	3	6	8	13	18	23
XHH, XHHW, XHHW-2	3/0	0	1	1	1	3	5	7	11	15	19
	4/0	0	1	1	1	2	4	6	9	12	16
	4	1	2	4	7	10	16	24	37	49	63
	2	1	1	3	5	7	12	17	26	35	45
	1/0	1	1	1	3	4	7	10	16	22	28
	2/0	0	1	1	2	3	6	9	13	18	23
	4/0	0	1	1	1	2	4	6	9	12	16
	250	0	0	1	1	1	3	5	7	10	13
	350	0	0	1	1	1	2	3	6	7	10
	500	0	0	0	1	1	1	2	4	5	7
	750	0	0	0	0	1	1	1	3	4	5

This table is for concentric stranded conductors only. For cables with compact conductors refer to NEC. Refer to latest NEC Code or Local Codes for updated requirements.

SAMPLE RATING LABEL

CATALOG NUMBERS U5952 & U5953
100A MAXIMUM, 120/240 VAC SINGLE PHASE, THREE WIRE
RAINPROOF NEMA TYPE 3R

SHORT CIRCUIT CURRENT RATING IS 10,000 RMS SYMMETRICAL AMPERE AT 240 VAC MAXIMUM, BUT IS LIMITED TO THE LOWEST SHORT CIRCUIT CURRENT RATING OF ANY INSTALLED CIRCUIT BREAKER. WATTHOUR METER NOT INCLUDED IN SHORT CIRCUIT CURRENT RATING. REPLACEMENT CIRCUIT BREAKER MUST BE THE SAME TYPE AND RATING. USE SIEMENS QP, QT; CUTLER-HAMMER QP, BD, BR; SQUARE D HOMELINE; G.E. TG, THQ, THQL.

SUITABLE FOR USE AS RECREATIONAL VEHICLE SITE SUPPLY EQUIPMENT

UNDERGROUND FEED ONLY

ON TRIP OFF

TO RESET BREAKER MOVE TO "OFF" THEN TO "ON"

DANGER
HAZARD OF ELECTRICAL SHOCK OR BURN
TURN OFF POWER
SUPPLYING THIS EQUIPMENT BEFORE WORKING INSIDE

WIRE TERMINAL INFORMATION USE AL-CU CONDUCTORS		
TERMINAL	WIRE RANGE	TORQUE LB-IN
LINE AND LINE NEUTRAL	350 kcmil - #6	250
GROUND CONNECTOR	2/0 AWG - #14 AWG	120
LOAD NEUTRAL SLOTTED HEAD (LARGE HOLE)	14 - 10 8 6 - 4 3 - 1/0	35 40 45 50
LOAD NEUTRAL SLOTTED HEAD (SMALL HOLE)	14 - 10 8 6	20 25 35

SHIPPING TENDS TO LOOSEN BOLTED CONNECTIONS. CHECK AND TIGHTEN ALL HARDWARE BEFORE ENERGIZING UNIT.

SIZE OF FIELD INSTALLED CONDUCTORS SHALL BE 60° OR 75° C SIZED TO 60° C RATING FOR 110 AMPS OR LESS AND 75° C SIZED TO 75° C FOR 125 AMPS AND ABOVE.

* ALLOWABLE AMPACITIES OF INSULATED COPPER & ALUMINUM CONDUCTORS (3W IN CONDUIT) 75° C (167° F)

A		AL or **CU-Clad AL	
A	B	A	B
18	—	—	—
16	—	—	—
14	20†	—	—
12	25†	12	20†
10	35†	10	30†
8	50	8	40
6	65	6	50
4	85	4	65
3	100	3	75
2	115	2	90
1	130	1	100
1/0	150	1/0	120
2/0	175	2/0	135
3/0	200	3/0	155
4/0	230	4/0	180
250	255	250	205
300	285	300	230
350	310	350	250
400	335	400	270
500	380	500	310
600	420	600	340
700	460	700	375
750	475	750	385

A = Size: AWG/MCM
*B = Ampere Rating for Insulation Types:
FEPW, RH, RHW, THW, THWN, XHHW, USE, 2W.
**C = Ampere Rating for Insulation Types:
RH, RHW, THW, THWN, XHHW, USE (Per NEC table 310-16)

AMPACITY CORRECTION FACTORS

Ambient Temp. C°	Correction Factor	Ambient Temp. F°
21 - 25	1.05	70 - 77
25 - 30	1.00	78 - 86
31 - 35	.94	87 - 95
36 - 40	.88	96 - 104
41 - 45	.82	105 - 113
46 - 50	.75	114 - 122
51 - 55	.67	123 - 131
56 - 60	.58	132 - 140
61 - 65	.33	141 - 158

GANG SOCKET OVERALL AMPACITIES

# of Meter Pos.	100A/Pos. Ampacity	125A/Pos. Ampacity	150A/Pos. Ampacity	200A/Pos. Ampacity
2	200A	200A	200A	200A #
3	200A	225A	225A	270A
4	200A	250A	270A	360A
5	225A	285A	338A	450A
6	270A	330A	396A	528A

Overall Ampere ratings of UL-listed Milbank multiple position meter sockets are based on **2008 NEC Handbook Article 220-84** and **ANSI / UL-414** (except where restricted by line connector size). These requirements provide for a diversity factor / demand factor being utilized in determining the overall (main bus /lug) rating of a gang socket. All Milbank UL-listed gang sockets meet or exceed these diversity factor/demand and factor requirements. Standard overall Ampacity ratings for UL-listed and non-UL-listed gang sockets are as shown in the chart below. Ampere ratings of meter sockets are based on the meter socket being wired with 75° C insulated wire conductor, sized in accordance with **Table 310-16** of the **National Electric Code**.

† Unless otherwise permitted elsewhere in the Code, the overcurrent protection for conductor types marked with an obelisk (†) shall not exceed 15 Amps for 14 AWG, 20 Amps for 12 AWG, and 30 Amps for 10 AWG copper; or 15 Amps for 12 AWG and 25 Amps for 10 AWG aluminum and copper-clad aluminum after any correction factors for ambient temperature and number of conductors have been applied.

Some constructions are rated at 400 Amps overall (1252). Contact your sales representative for more information. Refer to latest NEC Code or Local Codes for updated requirements.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Important Note

In addition to national and local electrical codes, many utilities have specific requirements for metering equipment. Always consult the serving utility for their specifications and requirements prior to ordering or installing Milbank meter mounting equipment.

Before Energizing

1. Give equipment a thorough visual examination to determine that:
 - a) No shipping or installation damage exists.
 - b) Proper clearances have been maintained.
 - c) All connections have been made.
 - d) Equipment is clean and dry.
2. Make a thorough examination to:
 - a) Verify tightness of all bolted connections (see table below).
 - b) Manually operate all circuit breakers, switches, relays, etc.
 - c) Check rigidity of all mountings, bus bars and components.
 - d) Use test equipment to check continuity of circuitry and integrity of insulation.
3. All switches and circuit breakers should be in the OFF position.
4. Verify that manual meter bypass (if applicable) is in non-bypass position.
5. Install cover and/or close doors.
6. If installation is not being energized at this time, follow "after-energizing" steps listed below. These steps will secure the installation in case of accidental energization.

When Energizing

1. Use caution and follow established safety procedures:
 - a) Wear safety apparel.
 - b) Use safety equipment.
 - c) Take action to prevent injury to yourself and others in the event of failure of the installation.
 - d) Take action to prevent/decrease damage to property in the event of failure of the installation.
 - e) If you are unsure how to safely energize the installation, consult a qualified and experienced professional.

After Energizing

1. Secure the installation:
 - a) To prevent accidental contact with energized parts, cover all openings with approved filler devices.
 - b) To prevent unauthorized access, secure all covers and/or doors with approved security devices.
 - c) Attach/post information to advise others of potential hazards associated with the installation.

Recommended Torque for General Applications*

Nominal Size	Joint Description		Head Type	Torque (Inch Lbs.)
	Screw	Nut		
10	Brass	Brass nut or extruded hole	All	20-25 inch lbs.
10	Steel	Copper or aluminum busbar $\leq 1/8"$	All	25-30 inch lbs.
10	Steel	Steel nut or extruded hole; CU or AL busbar $> 1/8"$	All	30-35 inch lbs.
12	Steel	Aluminum extruded hole	All	30-35 inch lbs.
12	Steel	Steel nut or extruded hole	All	40-50 inch lbs.
1/4	Steel	Aluminum extruded hole	All	40-50 inch lbs.
1/4	Steel	Steel nut or extruded hole; CU or AL busbar	All	50-60 inch lbs.
5/16	Steel	Aluminum extruded hole	Hex	60-70 inch lbs.
5/16	Steel	Steel nut or extruded hole; CU or AL busbar	Hex	100-150 inch lbs.
3/8	Steel	Steel nut	Hex	150-200 inch lbs.
1/2	Steel	Steel nut	Hex	200-250 inch lbs.

* Interior labels typically indicate the required torque for wire connectors and studs, and should be referenced first.
CU: Copper
AL: Aluminum



Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Materials

Steel Quality

The meter equipment listed in this catalog is made of galvanized steel (AISI* G90) to maximize weather resistance.

*American Iron and Steel Institute.

Steel Sheet

16-gauge, galvanized, sheet: 1 1/4 oz./ sq.ft. class zinc-coated. (AISI G90) 14-gauge, galvanized, sheet: 1 1/4 oz./ sq.ft. class zinc-coated.

Aluminum Extrusion

Wire-terminals: Alloy; 6061-T6, tin-plated for CU/AL wire.

Bus bar: Alloy; 6101-O and 6063-O

Aluminum Sheet

3000 series aluminum sheet, H14, or 5052 series aluminum sheet, H32. Where applicable thicknesses range from .064 – .125.

Copper Sheet and Bus

Electrolytic copper with tin plating in most applications.

Insulating Materials

- In most units, support bases for current-carrying components are molded from fiberglass reinforced high-strength, track resistant thermoset polyester molding compounds.
- Clear or black safety shields and polarity barriers are molded from high-strength, track resistant, polycarbonate molding compounds.
- Various sheet insulating materials, as appropriate for the application are utilized in the fabrication of flat, formed and punched component parts and barriers.

Finish

Process

Light gray state-of-the-art electrostatically applied powder paint offers a durable, non-fading finish. For further information concerning the chemical analysis of the weather-resistant finish, please contact your local Milbank Manufacturers' Representative.

Metal Fasteners


Zinc-coated with a chromate dip.

Ratings and Compliance


All Milbank electrical enclosures in this catalog are rated NEMA 3R enclosure unless otherwise specified on individual product pages. All enclosures with a UL designation are constructed per the appropriate UL standard and may be installed per the National Electric Code. UL procedure files associated with the UL Standards are listed as follows: Meter Sockets (UL 414, File E30202), Test Switches (UL 414, File E62531), Power Outlets (UL 231, File E90945), Panelboards (UL 67, File E32628) and Pullout Switches (UL 1429, File E133062). Additional standards are utilized as applicable: Meter Sockets (ANSI C12.7), Test Switches (ANSI C12.9) and Panelboards (NEMA PB-1).

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.







2 and 3-WIRE FORMS
1S & 2S




2 and 3-WIRE FORMS
1S & 2S with bypass




2 -WIRE FORM 3S
5th Term. 9 o'clock




2-WIRE FORM 3S
with bypass




2-WIRE FORM 3S
5th Term. 6 o'clock




2-WIRE FORMS 3S
with bypass




2 ELEMENT 3-WIRE
NETWORK FORM 12S
5th Term. 9 o'clock




2 ELEMENT 3-WIRE
NETWORK FORM 12S
5th Term. 9 o'clock




2 ELEMENT 3-WIRE
NETWORK FORM 12S
5th Term. 6 o'clock




2 ELEMENT 3-WIRE
NETWORK FORM 12S
with bypass
5th Term. 6 o'clock




3-WIRE FORMS 4S




3-WIRE FORM 4S
with bypass




2 or 3 ELEMENT
3Ø4W Y or Δ
Y FORM 14S




2 or 3 ELEMENT
3Ø4W Y or Δ
with bypass




2 ELEMENT 3Ø4W Y or
Δ Y FORM 7S Δ FORM 24S
with bypass




2 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 5S




2 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 5S with bypass



2 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 13S




2 or 3 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 13S with bypass




2 or 3 ELEMENT 3Ø4W
Y or Δ Y FORM 9S
Δ FORM 8S


TR= Transformer Rated
SC= Self-Contained



2 or 3 ELEMENT
3Ø3W, Y or Δ
FORM 8S & 9S with bypass



2 ELEMENT
3Ø4W Y
FORM 6S



2 ELEMENT
3Ø4W Y FORM 6S
with bypass

Standard NEMA Configurations

63

Reference Information Only

2-Pole | 3-Wire | Grounding Receptacles

Straight Blade Wiring Devices						Twist-Lock Wiring Devices		
Volts	Code	15 Amps	20 Amps	30 Amps	50 Amps	15 Amps	20 Amps	30 Amps
125V	5							
		5-15R	5-20R	5-30R	5-50R	L5-15R	L5-20R	L5-30R
250V	6							
		6-15R	6-20R	6-30R	6-50R	L6-15R	L6-20R	L6-30R
277V	7							
		7-15R	7-20R	7-30R	7-50R	L7-15R	L7-20R	L7-30R

3-Pole | 3-Wire | Special Applications

Straight Blade Wiring Devices					Twist-Lock Wiring Devices	
Volts	Code	20 Amps	30 Amps	50 Amps	20 Amps	30 Amps
125V 250V	10					
		10-20R	10-30R	10-50R	L10-20R	L10-30R

3-Pole | 4-Wire | Grounding

Straight Blade Wiring Devices						Twist-Lock	
Volts	Code	15 Amps	20 Amps	30 Amps	50 Amps	20 Amps	30 Amps
125V 250V	14						
		14-15R	14-20R	14-30R	14-50R	L14-20R	L14-30R

2-Pole | 3-Wire | Grounding | NEMA Trailer

Straight Blade Wiring Devices		
Volts	Code	30 Amps
125V	TT	

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Milbank's Power Distribution & Controls

are an alternative to unsightly and inefficient strut and backboard structures. Power distribution and controls are an attractive, secure, easy-to-install and cost-effective solution for underground remote site power distribution. Cabinets are weather-resistant enclosures that can be crafted to suit any environment with various mounting options. Each individual unit features a utility pull section with an optional meter socket and a separate customer section with distribution and control equipment.




Strut and Backboard



Commercial Pedestal

UL-Listed as Industrial Control Equipment (File E113855)**Standard Features**

- NEMA Type 3R rain-resistant, vandal-resistant cabinet of polyurethane powder coated steel (aluminum or stainless steel also available).
- UL-listed as enclosed industrial control equipment (UL508A).
- Isolated lockable and sealable utility metering and lug landing sections.
- Lockable customer section for distribution and control equipment with internal deadfront.
- Print pocket inside customer section door contains wiring schematics and installation instructions.
- Load centers are UL-listed for use with various manufacturers' circuit breakers.
- All stainless steel external hardware (screws, bolts, hinges, handles, hasps and sealing screws).

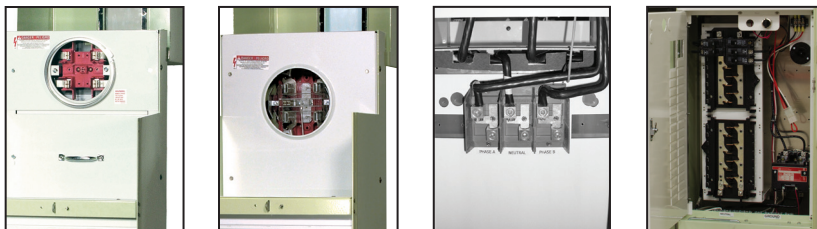

Every utility requires an exposed meter in all units.



Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Power Distribution & Controls

65

Attractive | Easy to Install | Secure | Cost-Effective



Applications

These units are ideal for controlling and metering:

- Traffic signals and street lighting for municipalities.
- Power distribution for electric vehicle charging stations.
- Communication equipment such as cell towers and telephone vaults.
- Event power for fairgrounds, outdoor markets, portable offices, holiday lights, etc.
- Outdoor lighting for athletic fields, tennis and basketball courts, parking lots, landscaping and subdivision entrances.

Available Factory-Installed Options


- Meter sockets: ring-type or ringless, up to 400 Amps
- Main and branch breakers or T fuses
- Distribution: copper load centers and panelboards
- Clocks, timers and relays
- Photoelectric cells and controls
- Various power receptacles: pin and sleeve, twist lock or straight blade
- Contactors: lighting, definite purpose, motor starters
- Surge protection and lightning arresters
- Generator inlets with interlocked breakers
- Push button controls
- Thermostat controls, fans and heating strips
- Power blocks and terminal blocks
- Steel, aluminum and plywood backboards
- Transformers
- Interlock devices for circuit breakers

Options


- Available in steel, aluminum (raw painted or anodized) or stainless steel construction with powder coated finish available in eight standard colors or special-ordered RAL colors.
- Available for applications up to 400 Amps, 120V, 208V, 240V, 277V, 480V - 1Ø or 3Ø.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Accessories

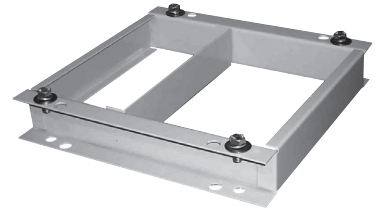

Pad-mount bases available for all pedestal sizes, inquire with your representative for details.



CP-ABK5/8

Anchor bolt kit
(includes four 5/8 - 13
x 18" anchor bolts)



105J

Fifth Terminals kit for
use with ring-type
meter sockets



K3865

Fifth Terminals kit
for use with ringless
meter sockets



CP-TC7D


7-day time clock kit

CP-TC24H

24-hour time clock kit

CP-TCWIRE

Male 4-pin connector
and wiring harness for
use with time clocks
other than above



CP-PE-HOA-3POS

HOA switch for field
installation



Application: Remote site service for multiple loads

Milbank Main Load Center Commercial Pedestals are designed to handle the vast majority of all requirements in a standard, stocked configuration.

- All units feature a load center with a plug-on, back-fed main breaker.
- Standard units are equipped with a 16-circuit load center in the 100 Amps or 24 circuit load center in 200 Amps models.
- Sub-feed lugs to allow feeding an external panel.

If your application requires turning loads on based on “dusk to-dawn” requirements, be sure to see the Milbank Switched Load Center Commercial Pedestal products on the following page.

Features

These units include everything required for remote site service:

- Expandable: load centers allow for future expansion without costly modifications.
- All units feature a 200 Amps meter socket with optional field-installable fifth terminals kit available.
- 22K Amps interrupting capacity (AIC) standard.
- Optional mounting base can be embedded in concrete for fast, easy installation.
- Separate sealable and lockable utility termination section.
- Separate sealable and lockable metering section.
- Separate sealable and lockable customer section with a load center for “always on” loads that include a main circuit breaker, 20 (125 or 200 Amps model) or 14 (100 Amps model) blank breaker spaces and a circuit directory to document configuration.



Every utility requires an exposed meter in all units.



Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Switched Load Center Commercial Pedestals

Switched Load Center Commercial Pedestals


1Ø 3-wire 120/240V or 208Y/120V

Designed not only to provide power for various loads, but also to switch specific loads on and off under certain conditions. A photoelectric cell is used for these controlled loads, and an optional time clock is also available.

Features

These units include everything required for remote site service:

- Expandable: load centers allow for future expansion without costly modifications.
- All units feature a 200 Amps meter socket with optional field-installable fifth terminal kit available.
- 22K Amps interrupting capacity (AIC) standard.
- Optional mounting base can be embedded in concrete for fast, easy installation.
- Separate sealable and lockable utility termination section.
- Separate sealable and lockable metering section.
- Separate sealable and lockable customer section with a control circuit including PE receptacle, Lexan® window, glare shield, Hand-Off-Auto (HOA) switch, contactor controlling a 16-circuit load center for controlled loads, a pre-mounted DIN rail and pre-wired connector to add an optional "plug-and-play" time clock kit for PE on and TC off operation and a circuit directory to document configuration.
- A load center for "always on" loads that includes a main circuit breaker, a control power circuit breaker, a switched load center main breaker, nine (125 or 200 Amps model) or 11 (100 Amps model) blank breaker spaces and a circuit directory to document configuration.

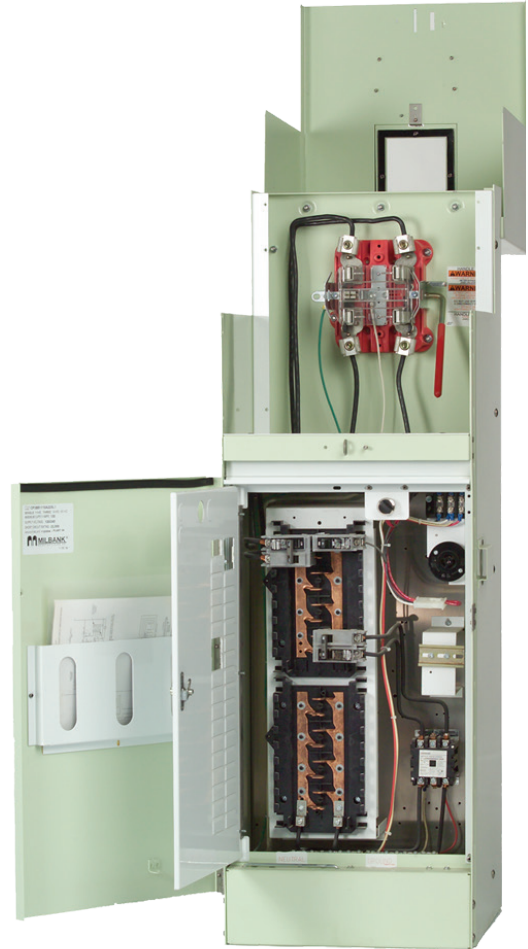


Ringless Lever Bypass shown

Applications



Traffic Signals



Parking Lots



Highways



Athletic Field Lighting

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.





Designed to provide a weather- and vandal-resistant metered enclosure for various loads and distribution. Each pedestal has been designed to handle a wide range of applications using standard, stocked configurations including:

- Choice of a single main breaker or twin service disconnect breakers gives flexibility to the pedestal design.
- Optional distribution with feed-through lugs below the service disconnect breakers allows the pedestal to handle numerous applications.
- Typical applications include remote homes where the metering is best located at the curb side or other remote area. The pedestal can also provide power to a secondary residence, on-site business, workshop, irrigation, lighting, security or other secondary load.

Features

These units include everything required for remote service:

- Main circuit breaker or dual service disconnects.
- Expandable: load center units that allow for future expansion without costly modifications.
- Optional mounting base can be embedded in concrete for fast, easy installation.
- Separate sealable and lockable utility termination section with lug termination.
- Separate sealable and lockable metering section.
- Separate sealable and lockable customer section with a circuit directory and a print pocket to hold all documentation.
- Meter socket options include ring-type with bypass studs, ringless with heavy duty lever bypass, or K-type bolt-on.

Applications



Commercial Job Sites



Remote Site for
Residential and
Commercial Job Sites



Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Surface-Mounted Power Distribution & Controls

Originally developed for small cellular communications, our surface-mounted power distribution and controls equipment offers the flexibility of larger power distribution equipment with a smaller footprint and several mounting options.

Features

- Mounting options allow for easy installation.
- Overhead and underground entry and exit, all in one unit.
- Meter and components in one enclosure.
- Custom component configurations and UL-listing covers all internal components on the UL508A and UL891.
- Can be mounted on multiple surfaces including:
 - Walls
 - Poles (narrow profile will have minimal extension past sides)
 - H frames (strut)
- Multiple bypass options available.
- Monitoring options available.
- Optional powder coating in Milbank standard color or custom color.



Benefits

- Smaller footprint
- Flood resistant
- Eliminates need for connecting components
 - Wire in - Wire Out


Applications



Communications
Power Distribution



Lighting
Control



Streetscape
Power Distribution

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.





Every utility requires an exposed meter in all units.

This product is specifically designed to provide battery backup power to a variety of loads and to conditionally switch specific loads on and off. It can use a photoelectric cell or time clock to control lighting circuits. Battery backup pedestals have options for both metered and unmetered power distribution. These pedestals are highly versatile and can handle the vast majority of today's backup power requirements. Its 19" rack design allows for easy adjustment of shelves to accommodate batteries, DC to AC inverters, transfer switches and other related equipment.

Features

- Works with 100 through 320 Amps meter sockets with the option of either a ring-type socket (conforms to EUSERC 308) with or without test/bypass blocks or a heavy duty ringless socket with lever bypass.
- Separate sealable utility termination compartment.
- An isolated separate customer section with service disconnects, power distribution options and power control.
- 19" wide rack in customer compartment for easy layout of equipment.
- Includes trays to accommodate required batteries.
- Thermostat with cooling fan.
- Filtered louvers for heat rise flow through ventilation.
- Three-point door latch (key or padlockable).

Note

- May require customization based on regional requirements.

Applications



Camera and Security Locations



Parking Lots



Traffic Signals



Communications Power Distribution

Options

- | | | |
|--|---|---|
| <ul style="list-style-type: none"> • Manual bypass switch • Transfer switch for generator power backup • Generator inlet receptacles 30 Amps through 200 Amps • Pad-lockable provision for receptacles | <ul style="list-style-type: none"> • Police access door • Metered load center distribution • Unmetered load center distribution • Photoelectric controls (for street lighting) • Time clocks • HOA switches | <ul style="list-style-type: none"> • Contactors • GFCI duplex receptacles • Thermostat for heating control • Heating pads or elements • Roll-out shelves for batteries • Surge arresters and lighting arresters |
|--|---|---|



Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Power Distribution & Controls

71

Power Transfer Commercial Pedestals



Power transfer commercial pedestals provide metered or unmetered AC power, distribution, surge suppression, mechanical interlock and standby generator receptacles — in one compact pedestal.

Features

- 120/240V 1Ø3W through 277/480V 3Ø4W ratings
- Metered or unmetered units
- Choice of EUSERC ring-type or ringless meter sockets
- 60 Amps through 400 Amps ratings
- Pad-lockable, isolated utility compartments
- 20 Amps GFCI convenience receptacle
- Lockable recessed generator receptacle door
- Utility and generator indicator light options
- All stainless steel hardware
- Galvanized steel, aluminum or stainless steel cabinet options
- Custom designs available

Note

- May require customization based on regional requirements.



Every utility requires an exposed meter in all units.

Applications



Traffic Signals



Pump and Lift Stations



Communications
Power Distribution

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.





Every utility requires an exposed meter in all units.

Designed to be used where a smaller service package would be a better choice over larger switchgear equipment. These pedestals have amperage ratings of 400 to 800 Amps at voltages up through 480V three phase.

Features

- Available configurations up to 800 Amps.
- All utility equipment is isolated in separate padlockable and sealable compartments.
- Separate customer compartment designed to hold distribution and control equipment.
- Deadfront customer construction for enhanced safety measures.
- A mounting base option for various applications.
- Optional construction in steel, aluminum and stainless steel.

Note

- May require customization based on regional requirements.

Applications




Commercial and
Industrial Control
Systems



Pump and Lift
Stations



Water Treatment
Plants



Electric Vehicle
Charging Stations



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Slimline Commercial Pedestals



Milbank Slimline Commercial pedestals provide a sleeker, smaller footprint with wireway access on the side of the unit, rather than the back. This allows maximum flexibility to install the pedestal anywhere physical space is at a premium.

Providing unmetered AC power, distribution, surge suppression, mechanical interlock and standby generator receptacle — all in a neat, compact pedestal.

Features

- Available for 100 or 200 Amps.
- Vandal-resistant, secure and attractive design.
- Customer compartment with distribution and control equipment with swing deadfront door, secured with both a hasp/latch and draw latch outer door.
- Utility metering compartment protected with a hinged hood, increasing resistance to meter vandalism.
- Slim design creates a smaller footprint.
- Wireway located on left side of pedestal for utility incoming wire, allowing pedestal to be mounted with back as close as 14" to walls or structures.
- Available in 12" and 20" widths and 50" and 63" (metered) and 43" (unmetered) heights. Includes a print pocket for plans and drawings.
- Voltage range is between 120V and 480V.
- Compatible with both ringless and ring-type meter sockets, four to seven terminals.
- Available in a wide array of colors, including but not limited to all ANSI powder-coated paint colors upon request.
- Pedestal mounting base option saves time and labor to install on a cement pad—no anchor bolts required.
- Powder-coated G90 galvanized steel or aluminum; raw, anodized or powder-coated, as well as stainless steel exterior options.



With no need to coordinate, buy or wait for concrete, **direct bury pedestals** offer many advantages and can cut installation time down to less than an hour. Traditional direct bury pedestals can be awkward to transport and can only be used in a direct bury application. Milbank's modular design offers flexibility and convenience for distributors and contractors alike.



Notes

- May require customization based on regional requirements.
- Direct bury pedestals are only available for 12" pedestals. Constructed with 14-gauge steel.

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.





NEMA Commercial Enclosures

Milbank's line of commercial enclosures includes the full gamut of styles and sizes, everything from junction boxes to transformer cabinets, telephone cabinets to wireways.

Type-1 Enclosures

Milbank's NEMA Type-1 enclosures are designed for indoor use to provide a degree of protection to personnel against access to hazardous parts and to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects, such as falling dirt.

NEMA Type 3R Enclosures

Milbank's NEMA Type 3R enclosures are designed for either indoor or outdoor use to provide a degree of protection from harmful effects on the equipment due to the ingress of water (rain, sleet, snow) or prevent damage from the external formation of ice on the enclosure.

Wireways

Milbank's wide range of wireways are available in many styles and sizes and a varied range of fittings allow smooth transitions to and from many manufacturers' products.



Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

830.....	54	K4530	55	KCPLM-1234PM	33
850.....	54	K4709	43	KCPLM-1234UGBX.....	32
6002.....	51	K4709-02.....	43	KCPLM-1633	31
6003.....	51	K4709-02-3R.....	43	KCPLM-1633PM	33
6116.....	51	K4709-WS.....	43	KCPLM-1633UGBX.....	32
6554-X-400NF0K7L-IL	21	K4800-D	45	KCPLM-1634	31
708784-MO	46	K4802	54	KCPLM-1634PM	33
A					
A7514	50	K5410	44	KCPLM-1634UGBX.....	32
A7515	50	K5412	42	KCPLM-2033	31
A7516	50	K5413	42	KCPLM-2033PM	33
A7517	50	K5415	44	KCPLM-2033UGBX.....	32
A7518	50	K5421	44	KCPLM-2034	31
A7551	50	K5815	18, 19	KCPLM-2034PM	33
A8110	50	K5820	18, 19	KCPLM-2034UGBX.....	32
A8111	50	K5830	18, 19	KCPLM-2533	31
A8112	50	K5920-10GR	41	KCPLM-2533PM	33
A9064	50	K5920-11GR	41	KCPLM-2533UGBX.....	32
A-GP	51	K5920-38	41	KCPLM-2534	31
B					
BL7474	55	K5920-41	41	KCPLM-2534PM	33
BL7499	55	K5920-54	41	KCPLM-2534UGBX.....	32
C					
CL-200D	45	K5920-58	41	KCPLM-3033	31
CL200-D	45	K5920-75	41	KCPLM-3033PM	33
CP-21.....	51	K5920-111GR	41	KCPLM-3033UGBX.....	32
K					
K5T	54	K5920-522	41	KCPLM-3034	31
K1047	52, 54	K5920-BLANK	41	KCPLM-3034PM	33
K1190	54	K6213	42	KCPLM-3034UGBX.....	32
K1350	51	K8180	51	M	
K1350L	51	KCPL-413UGBX.....	32	M5-144	51
K1539	51	KCPL-433UGBX.....	32	MR-2	46
K1540	51	KCPL-434UGBX.....	32	P	
K1540L	51	KCPLM-413	31	P-13	45
K1541	51	KCPLM-433	31	Q	
K3082	51	KCPLM-433PM	33	Q120.....	42, 46
K3083	51	KCPLM-434	31	Q130.....	46
K3441	51	KCPLM-434PM	33	Q250.....	46
K3442	51	KCPLM-813	31	S	
K3865	54	KCPLM-813PM	33	S8324.....	50
K3866	54	KCPLM-813UGBX.....	32	U	
K4527	55	KCPLM-833	31	U1232-X-5T-K1	23
K4528	55	KCPLM-833PM	33	U1233-X-5T-K3	23
K4529	55	KCPLM-833UGBX.....	32	U1234-X-5T-K3	23
		KCPLM-834	31	U1252-X-5T-K1	23
		KCPLM-834PM	33	U1253-X-5T-K1	23
		KCPLM-834UGBX.....	32	U1254-X-5T-K3	23
		KCPLM-1233	31		
		KCPLM-1233PM	33		
		KCPLM-1233UGBX.....	32		
		KCPLM-1234	31		

Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



U1255-X-5T-K4	23	U5200-XL.....	40	U6229-X-400-K7L-IL-EVE.....	15
U1256-X-5T-K4	23	U5200-XL-41.....	40	U6281-XL-100-IL-5T9W-EVE	19
U2448-X-5T9-K3-K2-IL	12	U5200-XL-55.....	40	U6281-XL-150-IL-5T9W-EVE	19
U2732-XT.....	26	U5200-XL-75.....	40	U6281-XL-200-IL-5T9W-EVE	19
U2733-XT.....	26	U5220-XL.....	40	U6549-XL-200NF-5T9-IL-LG	21
U2734-XT.....	26	U5220-XL-41.....	40	U6550	21
U2735-XT.....	26	U5220-XL-55.....	40	U6550-XL-200NF-IL-LG	21
U2736-XT.....	26	U5220-XL-75.....	40	U6553-X-400NF-K3L-IL-5T9W....	21
U2872-XT-5T9.....	25	U5300	42, 43, 44, 45	U6585X2200K3L5T9WILEVE	16
U2873-XT-5T9.....	25	U5300-O	40	U6601-X-2/200-K3L-5T9-EVE	16
U2874-XT-5T9.....	25	U5300-O-41.....	40	U6602-X-2/200-K3L-5T9-EVE	20
U2875-XT-5T9.....	25	U5300-O-55.....	40	U6603-X-2/200-K3L-5T9-EVE	20
U2876-XT-5T9.....	25	U5300-O-75.....	40	U6615-XL-200NF-5T9-IL-LG (Delta)	
U3791N	13	U5320-O	40	21	
U3791NRXL100IL5T9WEVE	13	U5320-O-41.....	40	U7043-XL-TG-KK-IL-5T9W	10
U3791NRXL150IL5T9WEVE	13	U5320-O-55.....	40	U9551-RXL-5T9-IL	11
U3791NRXL200IL5T9WEVE	13	U5320-O-75.....	40	U9701-XL-IL.....	11
U3802	6	U5750-RXL-150-IL-EVE.....	14	U9801-RXL-IL-GEN-TAP-5T9-EVE11	
U3812	6	U5750-RXL-200-IL-EVE.....	14	UAP6094-O	37
U3822-20GWR.....	7	U5882-X-KK-K3-5T-KCPL.....	27	UAP6095-O	37
U3832	6	U5883-X-KK-K3-5T-KCPL.....	27	UAP6096-O	37
U3862	6	U5884-X-KK-K3-5T-KCPL.....	27	UQFB-100.....	48, 49
U4013-X-2/K7-IL.....	12	U5885-X-KK-K3-5T-KCPL.....	27	UQFB-125.....	49
U4569-XL-100.....	48	U5886-X-KK-K3-5T-KCPL.....	27	UQFB-150.....	48, 49
U4569-XL-150.....	48	U5902-X-KK-K3-5T-KCPL.....	27	UQFB-200.....	48, 49
U4569-XL-200.....	48	U5903-X-KK-K3-5T-KCPL.....	27	UQFP-100.....	49
U4702-X-5T9-K3-K2-IL	12	U5904-X-KK-K3-5T-KCPL.....	27	UQFP-125.....	49
U4702-X-5T9-K3-K2-IL*.....	12	U5905-X-KK-K3-5T-KCPL.....	27	UQFP-150.....	49
U4881-O-50GB.....	8	U5906-X-KK-K3-5T-KCPL.....	27	UQFP-200.....	49
U4881-O-60GB.....	8	U5925O100KKIL5T9EVE	34		
U4908-O-11GB-KCPL.....	36	U5925O200KKIL5T9EVE	34		
U4908-O-11GB-KCPL*.....	36	U5934-XL-BLG	9	Z	
U5000-XL.....	39	U5971-XL-100.....	47	Z701776-MO	46
U5000-XL-41.....	39	U5971-XL-150.....	47	Z708080-MO	46
U5000-XL-55.....	39	U5971-XL-200.....	47	Z708767-MO	46
U5000-XL-75.....	39	U5972-XT-5T9-BL	29	Z802965-AC	55
U5100	42, 45	U5973-XT-5T9-BL	29	Z814898-AC	55
U5100-XL.....	39	U5974-XT-5T9-BL	29	Z818052-SC.....	46
U5100-XL-41.....	39	U5975-XT-5T9-BL	29	Z818480-SC.....	46
U5100-XL-55.....	39	U5976-XT-5T9-BL	29	Z901925-AC	55
U5100-XL-75.....	39	U6056-X-2/200-K7L-IL-EVE	17	Z903274-AO	55
U5136-O-100S-IL-5T9W-EVE*....	34	U6064-XTL-100-100	48	Z904486-AO	55
U5136-O-200S-IL-5T9W-EVE*....	34	U6064-XTL-150-150	48	Z915141-AC	46
U5137-O-100S-IL-5T9W-EVE	34	U6064-XTL-200-200	48	Z916264-AO	55
U5137-O-200S-IL-5T9W-EVE	34	U6220O100KKIL5T9WEVE	35	Z916265-AO	55
U5168XL100KKIL5T9WEVE	18	U6220O200KKIL5T9WEVE	35	Z917602-AC	46
U5168XL150KKIL5T9WEVE	18	U6221-O-100-IL-5T9W-EVE	35	Z918447-AC	46
U5168XL200KKIL5T9WEVE	18	U6221-O-200-IL-5T9W-EVE	35	Z918449-AC	46
U5200	43, 44	U6227X400K3LIL5T9WEVE	15	Z918466-AC	46
				Z1002769.....	46



Please consult serving utility for their requirements prior to ordering or installing. Specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

[illegible]

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



This image shows a full page of blank, lined paper. It features approximately 20 evenly spaced horizontal grey lines across its entire width, providing a template for handwriting practice or general note-taking. The margins are consistent on all sides.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.





MILBANK[®]
ENERGY AT WORK

Milbank Manufacturing | 4801 Deramus Ave., Kansas City, MO 64120 | 877.483.5314
milbankworks.com | @milbankworks