




Milbank 2-200 Amps Breaker Enclosures

U6064 Series



U6064-XTL-200-200

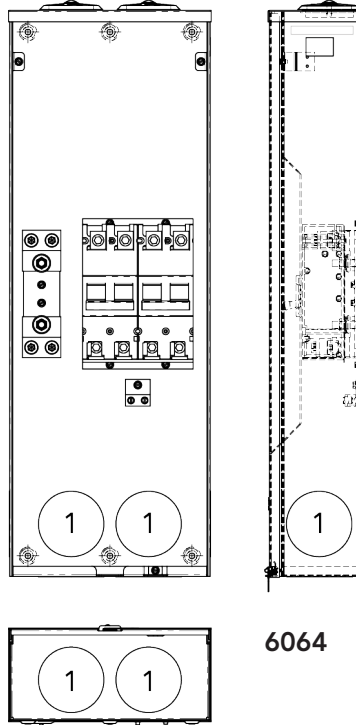

6064



U6064-XTL-200-200

Specifications

- 120/240 VAC, 1Ø applications
- UL listed
- Available for two UQFB style breakers in any combo of 100, 150, 200 Amps
- 10K AIC rated
- Removable front cover and deadfront
- NEMA 3R 16-gauge shell constructed of G90 galvanized steel
- Light gray polyester powder coat finish

Breaker Enclosures | 120/240 VAC | 1Ø

Catalog Number	Service	Hub	Dimensions			Knockouts
			D"	W"	H"	1
U6064-XTL-100-100	OH	(2) C.P.	4 ²⁷ / ₃₂	11	31	3
U6064-XTL-150-150	OH	(2) C.P.	4 ²⁷ / ₃₂	11	31	3
U6064-XTL-200-200	OH	(2) C.P.	4 ²⁷ / ₃₂	11	31	3

Circuit Breakers

10K AIC Bolt-On	Amps	Wire Range	
		CU	AL
UQFB-100	100	#3-#1	#1-1/0
UQFB-150	150	1/0-300	2/0-300
UQFB-200	200	1/0-300	2/0-300

Notes

- **Application:** To be used in conjunction with 320 Amps, single-phase meter sockets, or when the utility requires a separate enclosure for the meter socket and main breaker.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

