

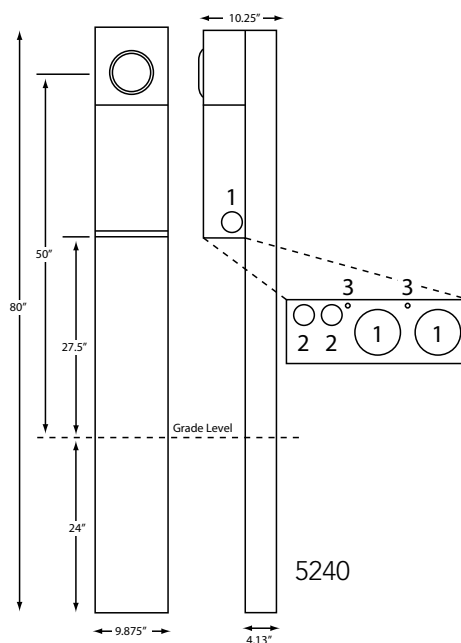


Versa-Ped Service Pedestals

U5240 & U5241 Series Ring Type Meter



U5240-O-200S



Knockouts		
1	2	3
2	1/2, 3/4	1/4

Specifications & Features

- UL listed
- 200 Amps maximum, 120/240 VAC, single phase, three wire meter socket
- Ring type meter socket with stainless steel latch
- Short circuit withstand rating of 22K AIC
- NEMA 3R construction for durable outdoor use, one piece post — lockable and sealable
- Milbank gray polyester powder coat finish
- Wire terminations accept copper or aluminum conductors
- Line & neutral: (2) #6-350 kcmil per phase
- Line ground: (4) #14-1/0
- Load (CB): 2/0-300 kcmil per pole
- Load neutral: (1) #6-350 kcmil
- Load ground: (2) #14-1/0, (4) #14/6
- Milbank plug-in main circuit breaker: available in 100, 125, 150 and 200 Amps, product number base **UQFPH-M**
- Four-circuit plated copper branch circuit interior accepts (2) 2-pole or (4) 1-pole standard plug-in type circuit breakers up to a total of 125 Amps maximum. Acceptable manufacturers: Cutler-Hammer, GE, Siemens or Square D Homeline.
- For factory-installed or field-installable receptacles please consult factory.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.





Versa-Ped Service Pedestals

U5240 & U5241 Series Ring Type Meter







200 Amps | 4 Terminals | Meter Main Pedestal | Ring Type

Catalog Number	Mounting	Meter Positions	Main CB	Circuits	Connectors CU/AL		Dimensions		
					Line	Load	D"	W"	H"
U5240-O-100S	Direct Burial	Single	100	4	#6-350	CB	10¼	10	80
U5240-O-200S	Direct Burial	Single	200	4	#6-350	CB	10¼	10	80
U5242-O-200S	Pad-mount	Single	100	4	#6-350	CB	10¼	10	56
U5241-O-100S	Direct Burial	Double	100	4	#6-350	CB	16	10	80
U5241-O-200S	Direct Burial	Double	200	4	#6-350	CB	16	10	80

Notes

- **Parallel to Series Conversion:** For field converting from parallel wired to series wired, order **K5194**.
- **Fifth Terminal:** For field-installable fifth terminal, order **K5T**.
- **Stabilizer Foot:** For field-installable stabilizer foot, order **K5415**.
- **Penta Bolt Locking:** For field-installable pedestal fronts penta bolt locking, order **K5039**.
- **Receptacles:** Consult factory for installed receptacle assemblies.

Accessories

					
K5415	K5035	K5T	K5193	K5194	K3450
Stabilizer foot with hardware (recommended for double pedestals)	Pad-mount kit with hardware; required for U5138/ U5139 pad-mount pedestals	Fifth terminal kit for 208y/120 volt 3-wire service	Bus kit to convert series-wired main breaker to parallel	Bus kit to convert parallel-wired main breaker to series	Telephone/CATV mounting bracket (mounts left or right)

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

