




Milbank Meter Sockets

U5865 | Temporary Power Solution



U5865-XL-38GBGRW

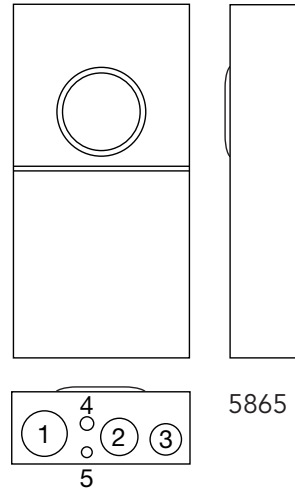

5-20GR 1-pole 20 Amps breaker	6-20R GFI 20 Amps 2-pole breaker	5-20GR 1-pole 20 Amps breaker

Specifications

- Designed for temporary power needs
- UL listed
- 100 Amps continuous rating
- 4 terminal, 1Ø
- Ring type meter front
- Short circuit withstand rating 10K AIC
- Provisions for up to three factory installed receptacles
- NEMA 3R construction for durable outdoor use, lockable and sealable front covers
- Milbank gray polyester powder coat finish
- Wire terminals accept copper or aluminum conductors
- Line & Neutral: #6 – 250 kcmil
- Six-circuit plated copper interior accepts standard plug-in type circuit breakers up to a total of 100 Amps maximum. Acceptable manufacturers: Siemens, Square D, Cutler-Hammer or GE

100 Amps | 4 Terminals | Temporary Power | Ring Type

Catalog Number	Service	Hub	Connectors CU/AL		Dimensions			Knockouts				
			Line	Load	D"	W"	H"	1	2	3	4	5
U5865-XL-38GBGRW	OH/UG	C.P.	#6-250	CB	5½	14	28½	3	2½	2	½,¾	¼,½

Additional receptacle configurations available, consult factory.

Plug-In Breaker Compatibility Chart

Amps	Cutler-Hammer	Siemens	GE	Square D
0-100	QP, BD, BR	QP, QT	TQ, THQ, THQL	Homeline (non-GFI)

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

