



Meter Main with Emergency Disconnect

UL Listed | 100-200 Amps | *NEC 2020 Compliant*



U5168-XL-200-HSP



Insulator



Breaker with insulator in place

As NEC 2020 adoption continues across the country, single position residential meter sockets will need an emergency disconnect. Milbank's **U5168** and **U5268** series sockets are compliant with NEC 2020 sections 230.85(1) emergency disconnect requirement and 230.62 enclosed or guarded service equipment requirement and could serve as the right solution for your project.

Note: meter mains do not require a load center to be compliant with NEC 2020. Always check with your local utility to see what products are approved in your area. Milbank is working hard on solutions to ensure our products meet NEC requirements. If you're looking for a product or have questions, contact your local rep.

Features

- 100-200 Amps
- Extra branch circuits
- Feed-through lugs
- Interlock kits available for generator backup power
 - K5815: Large frame main & small frame generator breaker
- Overhead/underground entry and exit
- G90 galvanized steel with powder coat finish
- Single phase
- NEMA 3R enclosure
- UL listed
- Manufactured in the USA


Now MEG Approved!



FOR RESIDENTIAL APPLICATIONS

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



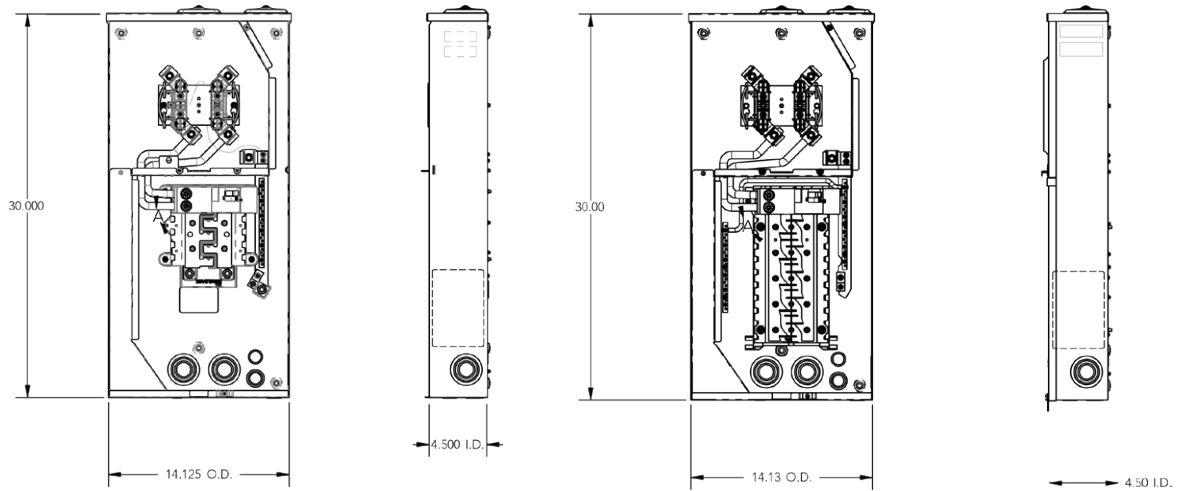

U5168 (-XTL Shown)

U5268 (-XTL Shown)

100-200 Amps | 4 Terminals | Meter Mains | Horn Bypass | Ringless | 1Ø3W

Catalog Number	Breaker Amps	Circuits	Service	Hub	Connectors CU/AL - Line	Dimensions		
						D"	W"	H"
U5168-XL-100-HSP	100	10	OH/UG	C.P.	#6-350	4½	14⅛	32
U5168-XTL-100-HSP	100	10	OH/UG	C.P.	#6-350	4½	14⅛	32
U5168-XL-125-HSP	125	8	OH/UG	C.P.	#6-350	4½	14⅛	32
U5168-XTL-125-HSP	125	8	OH/UG	C.P.	#6-350	4½	14⅛	32
U5168-XL-150-HSP	150	8	OH/UG	C.P.	#6-350	4½	14⅛	32
U5168-XTL-150-HSP	150	8	OH/UG	C.P.	#6-350	4½	14⅛	32
U5168-XL-200-HSP	200	20	OH/UG	C.P.	#6-350	4½	14⅛	32
U5168-XTL-200-HSP	200	20	OH/UG	C.P.	#6-350	4½	14⅛	32
U5268-XL-150-HSP	150	20	OH/UG	C.P.	#6-350	4½	14⅛	30
U5268-XTL-150-HSP	150	20	OH/UG	C.P.	#6-350	4½	14⅛	30
U5268-XL-200-HSP	200	20	OH/UG	C.P.	#6-350	4½	14⅛	30
U5268-XTL-200-HSP	200	20	OH/UG	C.P.	#6-350	4½	14⅛	30

Notes

- **Fifth Terminal:** For field-installable fifth terminal, order **K5T**.
- **Breakers:** Rated 22K AIC with **QN2200RH** main installed for **U5168**.
- **Sub Feed Lugs:** #6-350 sub feed lugs provided on 8 circuit interior. **Not available on 20 circuit interior.** Order K3701 if needed.
- **XTL-:** Two small hub closing plates.

Branch Breaker Chart

AIC Rating	Amps	Siemens	Cutler-Hammer	GE	Square D
10K	150-200	QNR	—	—	—
	≤ 125	QP	HQP, BR	THQL, THQL-GF (150A Only)	Homeline
22K	150-200	QNRH	—	—	—
	≤ 125	QPH	—	—	—

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

