





New England Multi-Position Meter Mains



U637# Series | UL-Listed | *NEC 2020 Compliant*





U6373-X-BL-NE

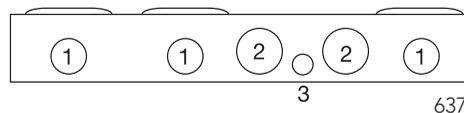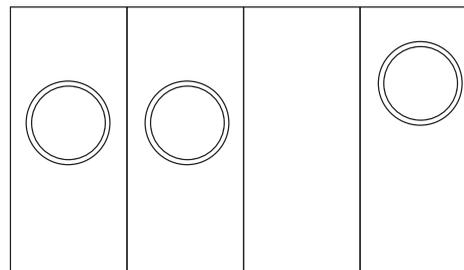

6373

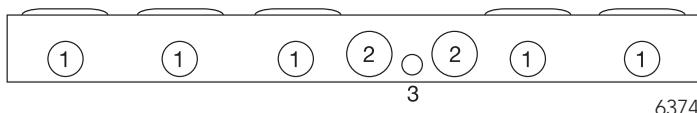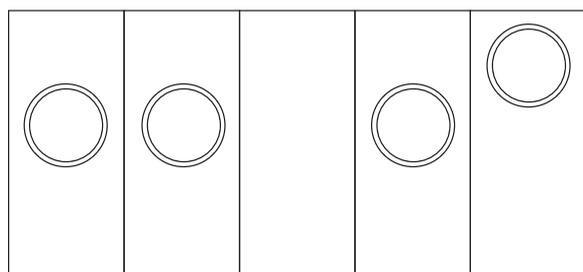

6374

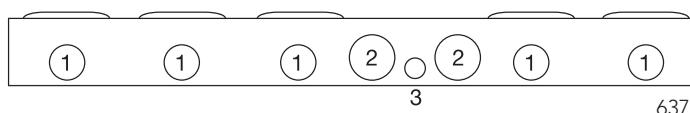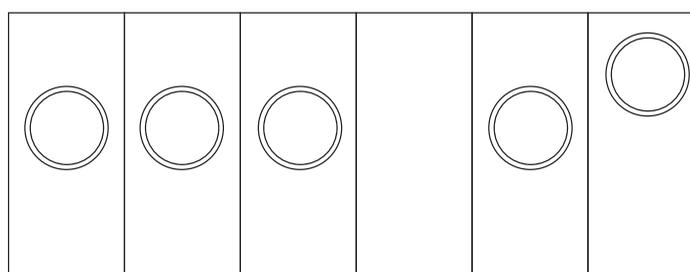

6375

200 Amps per Position | Multi-Position Meter Mains | Ringless

Catalog Number	Service	Positions	Main Bus Rating	Line Connector Size		Dimensions			Knockouts		
				Line	Load	D"	W"	H"	1	2	3
U6373-X-BL-NE	OH/UG	3	480 Amps	3/8" x 16 Studs	C.B.	6	36½	34	2½	3	1
U6374-X-BL-NE	OH/UG	4	640 Amps	3/8" x 16 Studs	C.B.	6	44 ¹³ / ₁₆	34	2½	3	1
U6375-X-BL-NE	OH/UG	5	640 Amps	3/8" x 16 Studs	C.B.	6	53 ³ / ₅	34	2½	3	1

Notes

- **AIC Rating:** All models are rated 22K AIC when used with approved breakers rated at 22K.
- **Hubs:** Units supplied with one closing plate. To order additional hubs, see hub suffix chart on accessories page.
- **Fifth terminal:** For a field-installable fifth terminal, order catalog number **K5T** for tenant positions. Order **K3865** for the far right house power lever bypass socket.

Breaker Chart - 10K AIC | For 22K AIC use Siemens QPH or QNH

Manufacturer	Cutler-Hammer	Siemens	GE (50 Amps Max)	Square-D
125 Amps or Less	BR, HQP, QPGF	QP, (QPH 22K)	THQL, THQL-GF	Homeline
150-200 Amps	—	QN, (QNH 22K)	—	—

NOTE

Each unit is supplied with a 200 Amps jaw-clamping lever bypass block assembly in the far right meter position only. All remaining positions are 200 Amps with no bypass.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.