

# New England Multi-Position Meter Mains

U666# Series | UL-Listed | *NEC 2020 Compliant*



U6662-X-5T9-BL-NE

125 Amps | 5 Terminals | Ringless | Lever Bypass

Catalog Number	Positions	Service	Main Bus Rating	Hub	Connectors CU/AL	Dimensions			Knockouts			
					Line	D"	W"	H"	1	2	3	4
U6662-X-5T9-BL-NE	2	OH/UG	200 Amps	C.P.	3/8" x 16 Studs*	6 1/3	36 15/16	31	4	2 1/2	1	1/2
U6663-X-5T9-BL-NE	3	OH/UG	300 Amps	C.P.	3/8" x 16 Studs*	6 1/3	47 1/4	31	4	2 1/2	1	—
U6664-X-5T9-BL-NE	4	OH/UG	400 Amps	C.P.	3/8" x 16 Studs*	6 1/3	57 1/2	31	4	2 1/2	1	—
U6665-X-5T9-BL-NE	5	OH/UG	500 Amps	C.P.	3/8" x 16 Studs*	6 1/2	67 5/8	31	4	2 1/2	1	—
U6666-X-5T9-BL-NE	6	OH/UG	600 Amps	C.P.	3/8" x 16 Studs*	6 1/3	78	31	4	2 1/2	1	—

## Notes

- **Knockouts:** See drawings on following page.
- **Short Circuit Current Rating:** All models are rated 22K AIC when used with approved breakers rated at 22K.
- **Bypass:** These units have locking jaw lever bypass.
- **Hubs:** Units supplied with two closing plate. To order separately, see the hub suffix chart on the accessories page in the New England catalog, available on the resources page of the Milbank website.
- **Fifth terminal:** Fifth terminals are factory-installed in the 9 o'clock position.
- **-BL:** Barrel lock provision.
- **Line side connectors:** Socket is supplied with 3/8" - 16 hex head nuts with Belleville washers. Separate lug kits are required for line side.
- **Load side connectors:** Dependant upon field-installed breaker.

## Breaker Chart - 10K AIC (unless noted 22K)


Manufacturer	Cutler-Hammer	Siemens	GE (50 Amp Max)	Square D
125 Amps or Less	BR, HQP, QPGF	QP (QPH 22K)	THQL, THQL-GF	Homeline
150-200 Amps	—	QN (QNH 22K)	—	—

## Connector Kits



Size	Suffix	Kit Number	Wire Range
Single	-K1	K1539	#6-350
	-K3	K1540	#4-600
Twin	-K2	K1350	#6-350
	-K4	K1541	#2-600

# New England Multi-Position Meter Mains



U6660 Series | UL-Listed | *NEC 2020 Compliant*

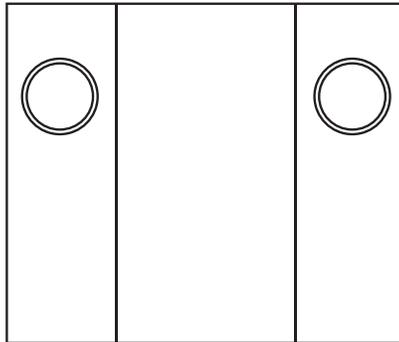



6662

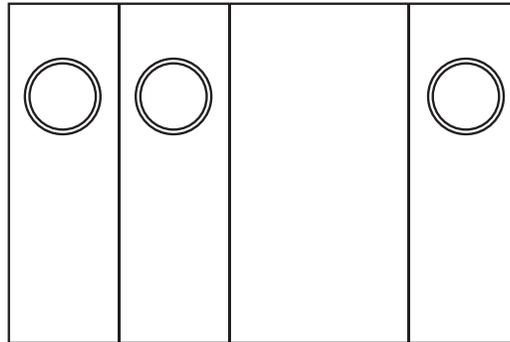



6663

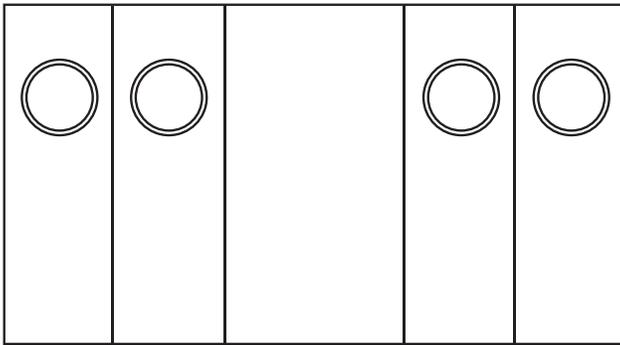

6664

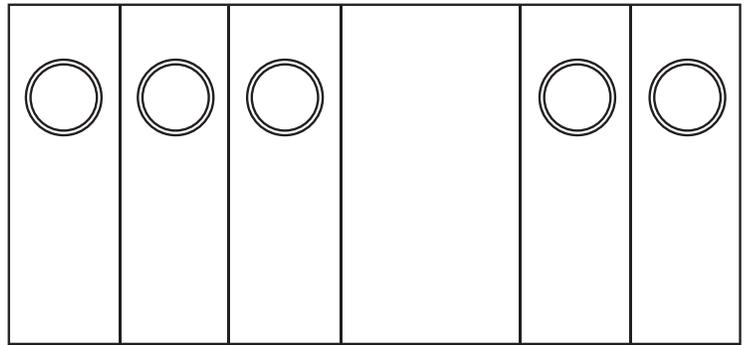

6665

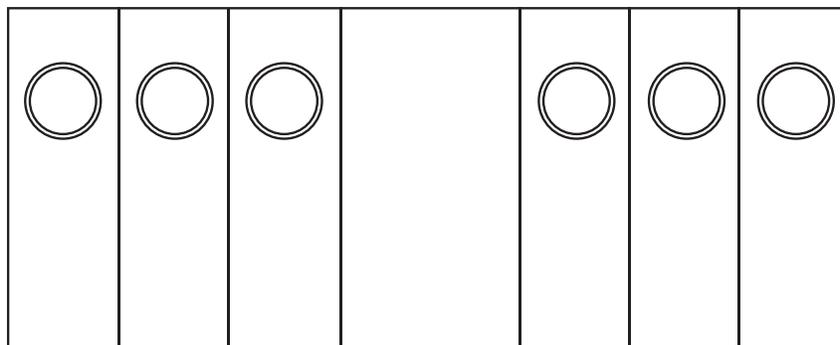

6666

