





Cold Sequence Meter Main Pedestals

60-200 Amps | 240 VAC | 4 Terminals | Lever Bypass | Ringless

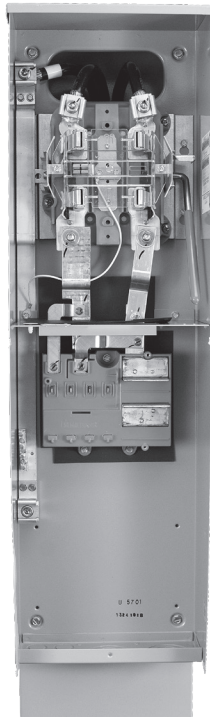

U5949-O-5T9

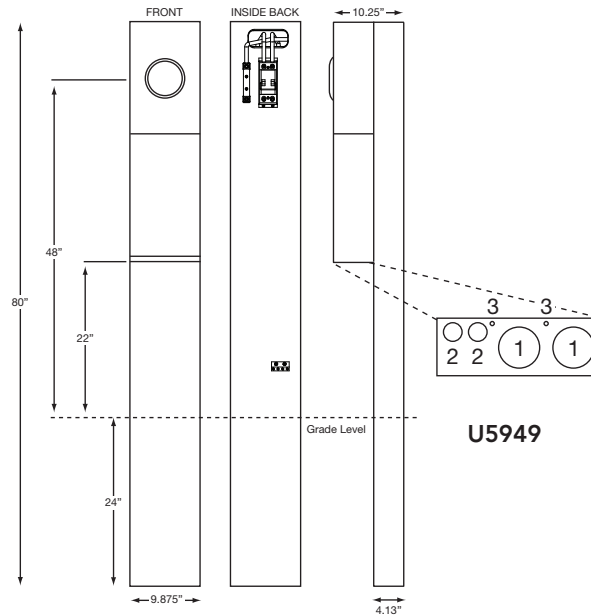

U5949

Overview

The **U5949** cold sequence meter main provides the utility a UL listed system that includes a heavy duty lever bypass meter socket and load center with a fused disconnect ahead of the meter. Being able to turn off the power ahead of the meter allows the utility to install, maintain or replace the meter while it is "cold."

60-200 Amps | 4 Terminals | Meter Main Pedestals | Lever Bypass | Ringless

Catalog Number	Service	Amps	Bypass	Connectors CU/AL		Knockouts		
				Line	Load	1	2	3
U5949-O-60PO-5T9	UG	60	Lever	#6-350	CB	2	1/2, 3/4	1/4
U5949-O-100PO-5T9	UG	100	Lever	#6-350	CB	2	1/2, 3/4	1/4
U5949-O-200PO-5T9	UG	200	Lever	#6-350	CB	2	1/2, 3/4	1/4

Notes

- **Parallel to Series Conversion:** When ordered without breaker, center is parallel wired. For field converting from parallel wired to series wired, order **K5194**.
- **Fifth Terminal:** For field-installable fifth terminal, order **K3865**.
- **Stabilizer Foot:** For field-installable stabilizer foot, order **K5415**.
- **Receptacles:** Consult factory for installed receptacle assemblies.
- **Breakers:** The main breakers to be used are the **UQFP** and **UQFPM** series breakers.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

