




# NEW: Cold Sequence Fused and Non-Fused Meter Mains

UL Listed | 320 Amps Continuous

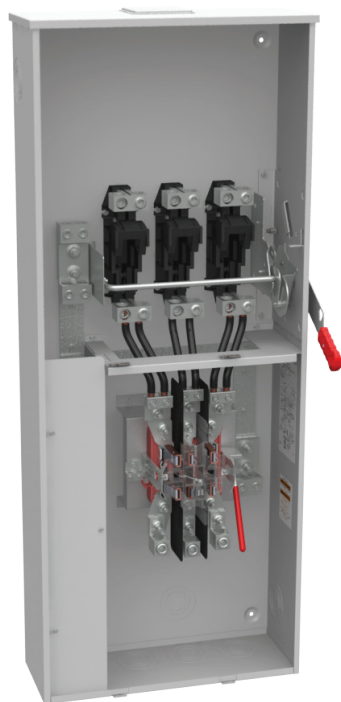

U6554



Save Time & Money



Save Valuable Labor Hours



Stay Secure

*Aesthetically pleasing, fewer components and a smaller footprint than using both a meter socket and disconnect. Faster Installation!*

## Features

- Easy installation
  - All-in-one socket knife switch combo saves time
- Durable enclosure
  - NEMA 3R rated
  - Standard enclosure: Powder-coated galvanized steel
  - Optional enclosure materials: Stainless steel or aluminum
- Wide range of optional utility specified components (stainless steel hasp, isolated neutral, barrel lock, etc.) upon request.
- Fuses not included
- SCCR rating of 10K
- UL listed
- Manufactured in the USA

### 320 Amps | Non-Fused

Catalog Number	Phase	Terminals	Dimensions		
			D"	W"	H"
U6553-X-400NF-K3L	1Ø3W	4 or 5	8¼	22	55
U6617-X-400NF	3Ø3W	5	8¼	22	55
U6554-X-400NF-K7L	3Ø4W	7	8¼	22	55

### 320 Amps | Fused

Catalog Number	Phase	Terminals	Dimensions		
			D"	W"	H"
U6555-X-400F	1Ø3W	4 or 5	8¼	22	62¼
U6618-X-400F	3Ø3W	5	8¼	22	62¼
U6556-X-400F-K7L	3Ø4W	7	8¼	22	62¼

## Notes

If Hot Sequence is needed, please contact your local Rep or Factory for part number.

Add prefix for below optional metals:

USS- stainless steel (no KO's or hub openings are included in the enclosure from the factory when ordered as stainless steel)

UAP- aluminum painted

Add suffix for below options:

-5T9/-5T6 fifth terminal designation

-IL barrel lock

-QG quadplex ground

-BLG barrel lock/guard provisions

-HSP stainless steel hasp

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.







# NEW: Cold Sequence Fused and Non-Fused Meter Mains

UL Listed | 320 Amps Continuous


## Non-Fused

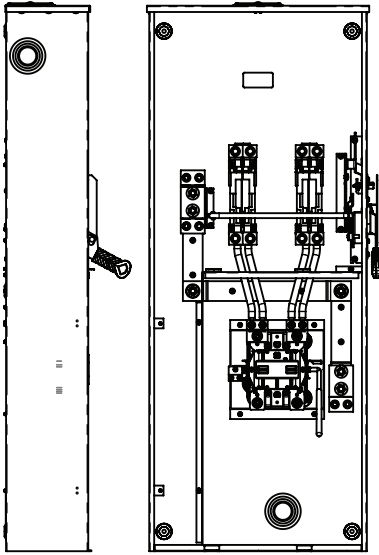

U6553

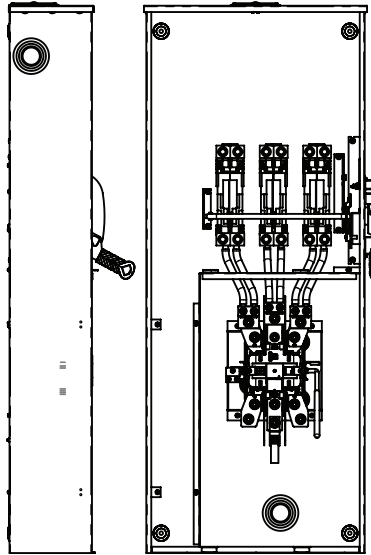


U6617

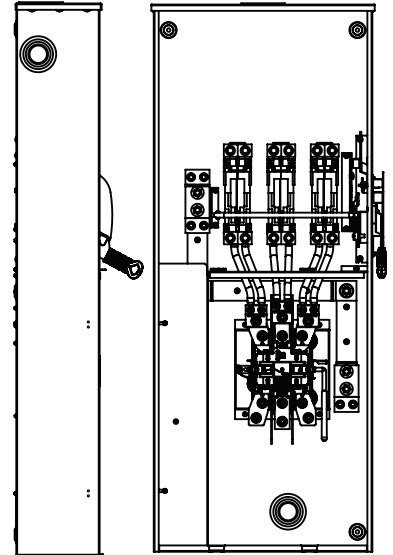


U6554


## Fused

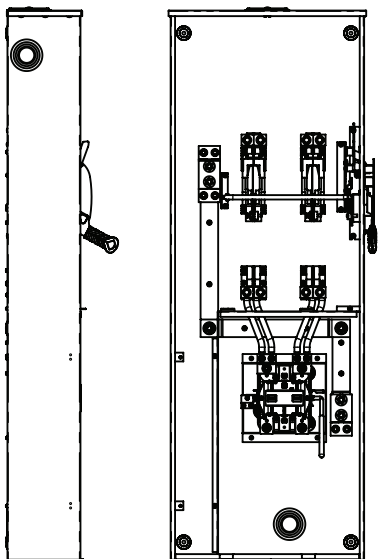

U6555

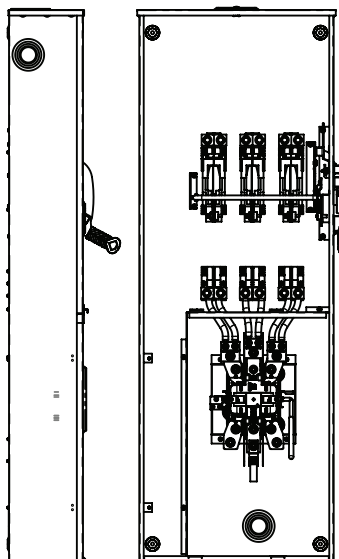

U6618

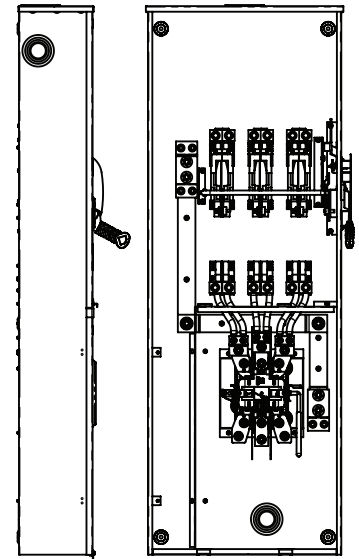

U6556

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

