





Consumers Approved 200A Meter Main

UL-Listed | *NEC 2020 Compliant*

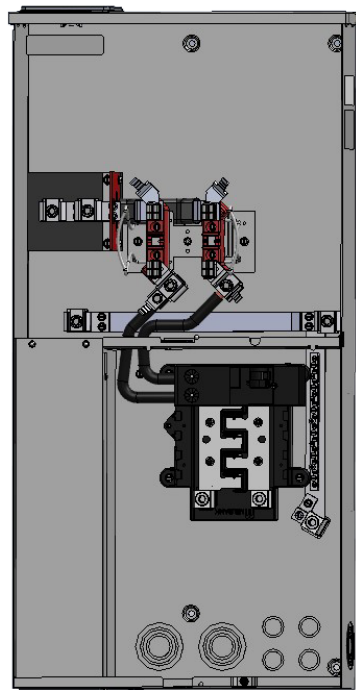

U6641-XL-200-KK-CE

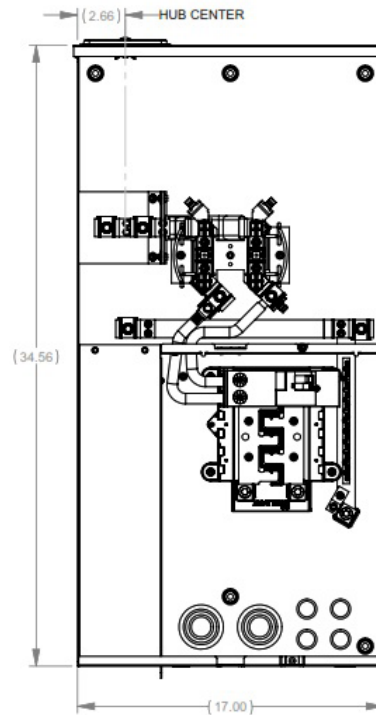

Milbank's U6641 is compliant with NEC 2020 sections 230.85(1) emergency disconnect requirement and 230.62 enclosed or guarded service equipment requirement and could serve as the right solution for your project.

Features

- **NEC 2020 Compliant**
- Extra branch circuits
- Feed-through lugs
- Interlock kits available for generator backup power
 - K5815: Large frame main and small frame generator breaker
- Overhead/underground entry and exit
- G90 galvanized steel with powder coat finish
- Single phase
- NEMA 3R enclosure

Notes

- **Bypass:** Horn bypass.
- **Fifth Terminal:** For field-installable fifth terminal, order K5T.
- **Interlock Kit:** For generator auxiliary circuit breaker interlock, order K5815 for large QN with small frame Q; order K5820 for large frame QN with large frame QN; order K5830 for small frame Q to small frame Q.
- **Sub Feed Lugs:** #6-350 sub feed lugs provided on 8- and 10-circuit interior.
- **Service Entry:** Overhead or underground. OH has up to 2 1/2" hub opening and UG has up to 3" knockout.
- **Main Circuit Breaker:** 100 Amps type Q small frame, 150 and 200 Amps type QN large frame. Breakers are not included with interlock kits and must be ordered separately.

Consult your local utility for approved products in your area.