




**MILBANK**  
ENERGY AT WORK





## U5794-X-400-5T-CB

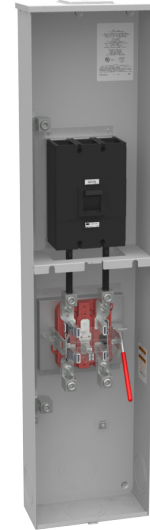

Catalog Number	U5794-X-400-5T-CB	Mounting	Surface Mount
Marketing Product Description	5 Terminal Ringless Large Closing Plate Lever Bypass 1-400 Ampere Main Breaker 5th Terminal 9 O'clock Position 480 Volt Cold Sequence	Enclosure	G90 Galvanized Steel with Powder Coat Finish
UPC	784572478978	Jaw Quantity	5 Terminal
Length (IN)	6	Bypass Type	Lever Bypass
Width (IN)	13	Number of Meter Positions	1 Position
Height (IN)	56	Equipment Ground	2 Barrel Ground Lug
Brand Name	Milbank	Hub Opening	Large Closing Plate
Type	Ringless Meter Socket	Line Side Wire Range	Two 3/0 AWG - 500 kcmil
Application	Meter Socket With Main	Load Side Wire Range	4 AWG - 600 kcmil or Two 1/0 AWG - 250 kcmil
Standard	UL Listed;Type 3R	Number Of Receptacles	0
Voltage Rating	600 Volts Alternating Current		
Amperage Rating	320 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	6L x 13W x 56H		
Number Of Cutouts	1		
Cutout Size	One 400 Ampere Main Breaker		
Cable Entry	Overhead		
Terminal	Single Mechanical		
Insulation	Glass Polyester		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	5	U/L MNTG.EMBOSS
B	4	3, 3½, 4 CONC. K.O.
C	1	¼ SOLID K.O.
D	1	¼, ½ CONC. K.O.
E	2	1¼, 1½, 2, 2½ CONC. K.O.

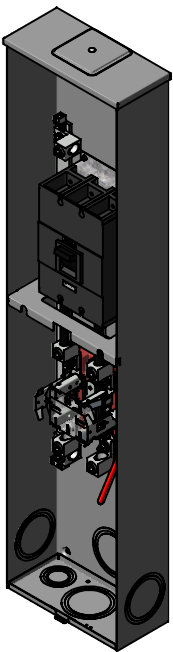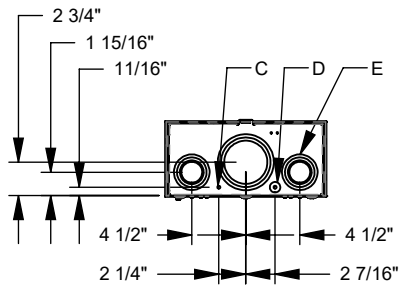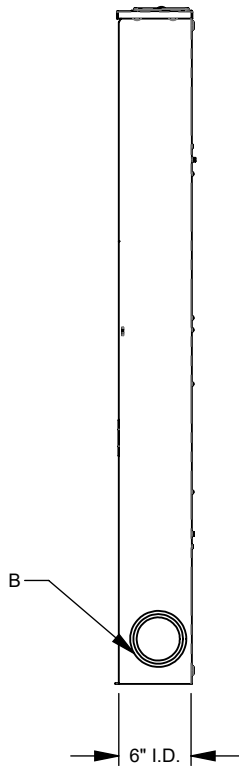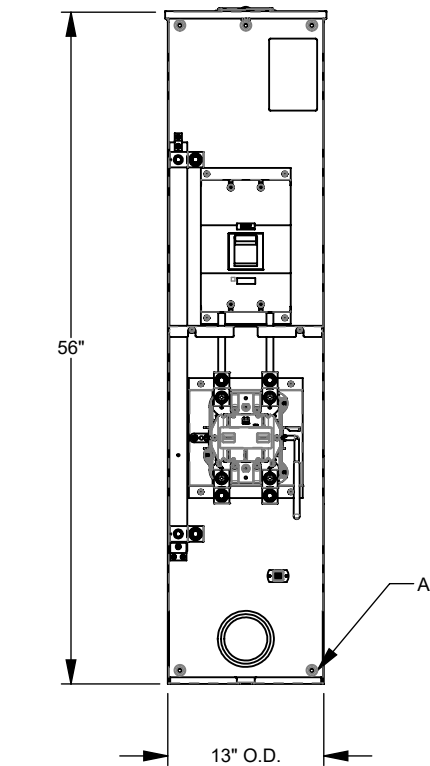

Version:

1

**All dimensions are +/- 1/16".  
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.