


CP3B - B Series



5 X Level 2 Dual-Port
OR 2 x Level 3 Dual-Port
EVSE Stations

Features

- 200-800 Amps
- 22K AIC Standard
- Back-fed Main Breaker
- Sub-feed Lugs
- 480V for DCFC Applications
- 120/240V 103W through 277/480V 304W ratings

Available in:

48" and 60" Heights
24" and 32" Widths

Suitable for:


Level 2

208V or 240V
1-Phase AC
12-80 Amps (Typ. 32)

Level 3

480V
1Ø and 3-Phase AC
100-200 Amps

**Best
Seller**

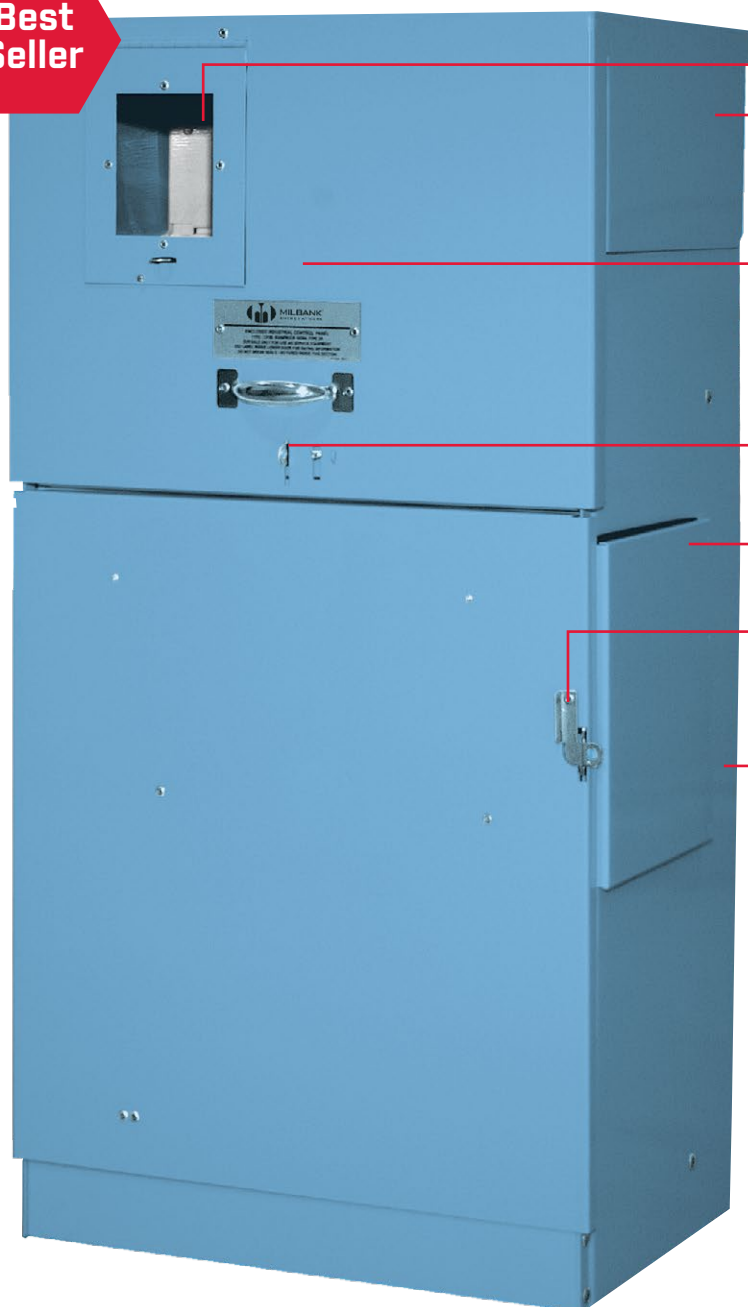

Lexan® Window

Meter Hood

Transparent window is included for meter reading purposes

Utility Approved Meter

Ringless and ring-type, with lever bypass and field installable fifth terminal kit available

Separate sealable & lockable metering section

Exterior Receptacles

GFCI duplex receptacles

Separate sealable lockable customer section

Construction

Galvanized Steel, Aluminum, or stainless-steel options. Standard colors available at no additional cost.

Milbank PD&C Cabinets are NEMA 3R Rated and UL Listed 508A & 891

Common Usage

Street Parking
Retail
Apartment Buildings
Office Buildings



Save Valuable Labor Hours



Pad Mount for Easy Installation!

Early shipment available upon request.

We are a PROUD American Manufacturer

