



MILBANK
ENERGY AT WORK

U5787-O-200-CB-BL







Catalog Number	U5787-O-200-CB-BL
Marketing Product Description	7 Terminal Ringless Plain Top Lever Bypass 1-200 Ampere Main Breaker 9-16 In Barrel Lock With Bracket Provision Cold Sequence
UPC	784572479487
Length (IN)	4.844
Width (IN)	26
Height (IN)	28
Brand Name	Milbank
Type	Ringless Meter Socket
Application	Meter Socket With Main
Standard	UL Listed;Type 3R
Voltage Rating	Up to 600 Volts Alternating Current
Amperage Rating	200 Continuous Ampere
Phase	3 Phase
Frequency Rating	60 Hertz
Size	4.844L x 26W x 28H
Number Of Cutouts	1
Cutout Size	One 200 Ampere Main Breaker
Cable Entry	Underground
Terminal	Single Mechanical

Insulation	Glass Polyester
Mounting	Surface Mount
Enclosure	G90 Galvanized Steel with Powder Coat Finish
Jaw Quantity	7 Terminal
Bypass Type	Lever Bypass
Number of Meter Positions	1 Position
Equipment Ground	2 Barrel Ground Lug
Hub Opening	Plain Top
Line Side Wire Range	1/0 AWG - 350kcmil
Load Side Wire Range	6 AWG - 350 kcmil
Barrel Lock Provision	9/16 Inch Knockout and Angle Bracket for Barrel Lock Provision
Number Of Receptacles	0

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	4	U/L MNTG.EMBOSS
B	2	¼ SOLID K.O.
C	4	1¼, 1½, 2, 2½ CONC. K.O.
D	6	1¼, 1½, 2, 2½, 3 CONC. K.O.
E	2	¼, ½ CONC. K.O.

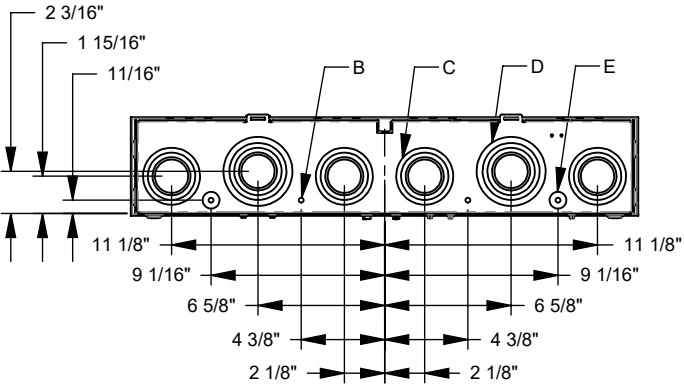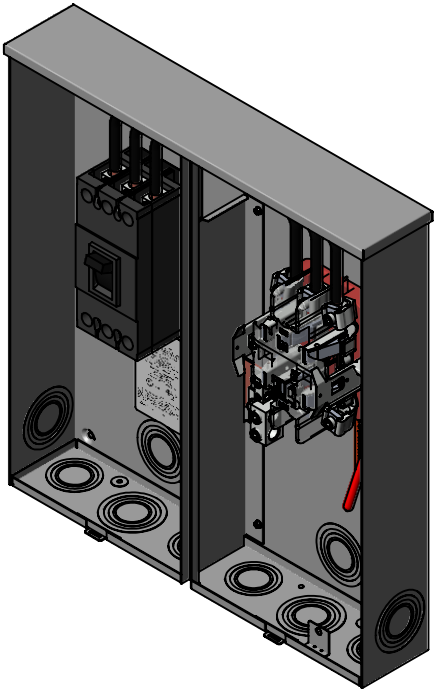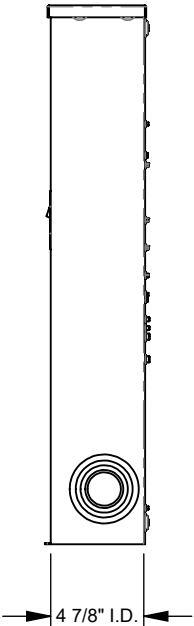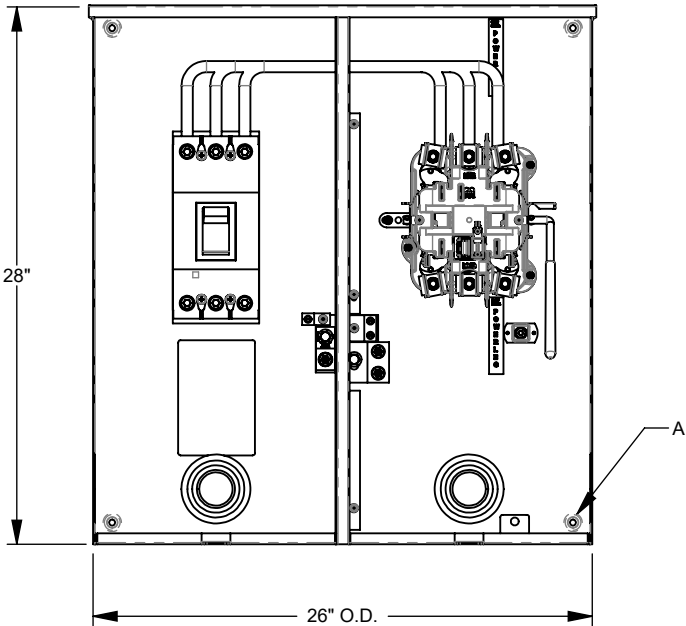

Version:

1

**All dimensions are +/- 1/16".
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.