




# Class 320 Meter Main w/Split Load Disconnects


UL-Listed | *NEC 2020 Compliant*

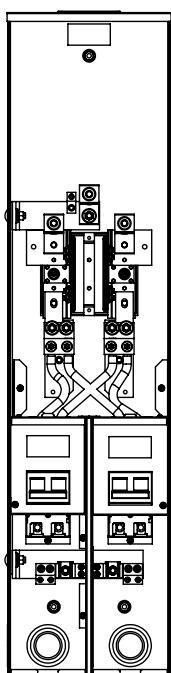


U6091



U6092

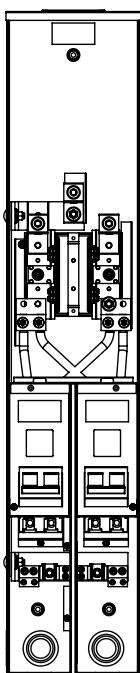

U6093



U6091-R-2-200



**Milbank's U6090 series** is an overhead entry 400A/Class 320 Socket that provides two load disconnects with a narrow space saving footprint and compliance to NEC 2020 sections 230.85(1) emergency disconnect requirement and 230.62 enclosed or guarded service equipment requirement. Great for ADU and outbuilding applications.

## Features

- NEC 2020 compliant
- Bypass and no bypass options
- Overhead entry
- G90 galvanized steel with powder coat finish
- Single phase
- NEMA 3R enclosure

320 Amps | 4 Terminals | Ring-Type | 1Ø3W | NEMA 3R | 120/240V

Catalog Number	Service	Primary Disconnect	Secondary Disconnect	Bypass	Dimensions			Knockouts				
					D"	W"	H"	1	2	3	4	5
U6091-R-2-200	OH	200 Amp/2-Pole Circuit Breaker	None	None	6	11 $\frac{5}{8}$	47 $\frac{1}{6}$	2 $\frac{1}{2}$	2 $\frac{1}{2}$	3	3	$\frac{3}{4}$
U6092-R-2-200	OH	200 Amp/2-Pole Circuit Breaker	None	None	6 $\frac{1}{8}$	9 $\frac{1}{2}$	47 $\frac{1}{8}$	2	2	2	1 $\frac{1}{2}$	$\frac{3}{4}$
U6093-R-2-200	OH	200 Amp/2-Pole Circuit Breaker	Link	Link	6	11 $\frac{1}{2}$	47	2 $\frac{1}{2}$	2 $\frac{1}{2}$	3	3	$\frac{3}{4}$

## Notes

- **Amperage rating:** 400 Amps, 320 Amps continuous.
- **Neutral:** Bonded neutral and ground factory-installed.
- **Line-side connectors:** Connectors provided for 4-600 or twin 1/0-250.
- Confirm acceptability with serving utility prior to ordering