



# U5871-XL-100-5T9



Catalog Number	U5871-XL-100-5T9	Insulation	Glass Polyester
Marketing Product Description	5 Terminal Ringless Small Closing Plate Lever Bypass 1-100 Ampere Main Breaker 10 Branch Circuit 5th Terminal 9 Oclock Position	Mounting	Surface Mount
UPC	784572587687	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Length (IN)	4.5	Jaw Quantity	5 Terminal
Width (IN)	14.125	Bypass Type	Lever Bypass
Height (IN)	33.5	Number of Meter Positions	1 Position
Brand Name	Milbank	Equipment Ground	Ground Bar
Type	Ringless Meter Socket	Hub Opening	Small Closing Plate
Application	Meter Socket With Main And Load Center	Line Side Wire Range	6 AWG - 350 kcmil
Standard	UL Listed;Type 3R	Number Branch Circuits	8
Voltage Rating	Up to 240 Volts Alternating Current	Number Of Receptacles	0
Amperage Rating	100 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.5L x 14.125W x 33.5H		
Number Of Cutouts	1		
Cutout Size	One 100 Ampere Main Breaker		
Cable Entry	Overhead or Underground		
Terminal	Lay in		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	6	U/L MNTG.EMBOSS
B	1	1/4", 1/2" CONC. K.O.
C	4	1/2", 3/4" CONC. K.O.
D	3	1/2", 3/4", 1" CONC. K.O.
E	3	3/4", 1", 1 1/4", 1 1/2", 2" CONC. K.O.
F	1	1", 1 1/4", 1 1/2", 2", 2 1/2" CONC. K.O.
G	1	1 1/4", 1 1/2", 2", 2 1/2", 3" CONC. K.O.

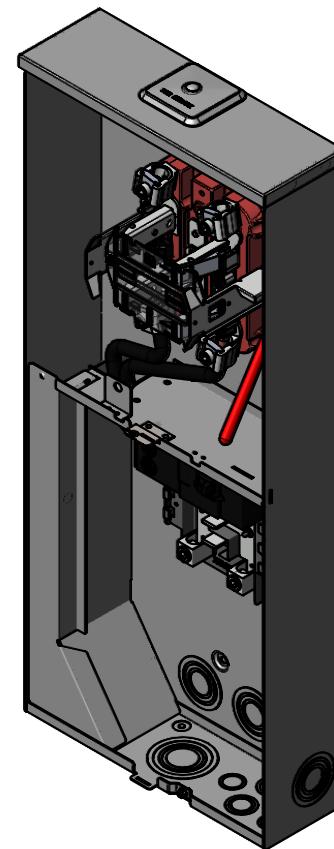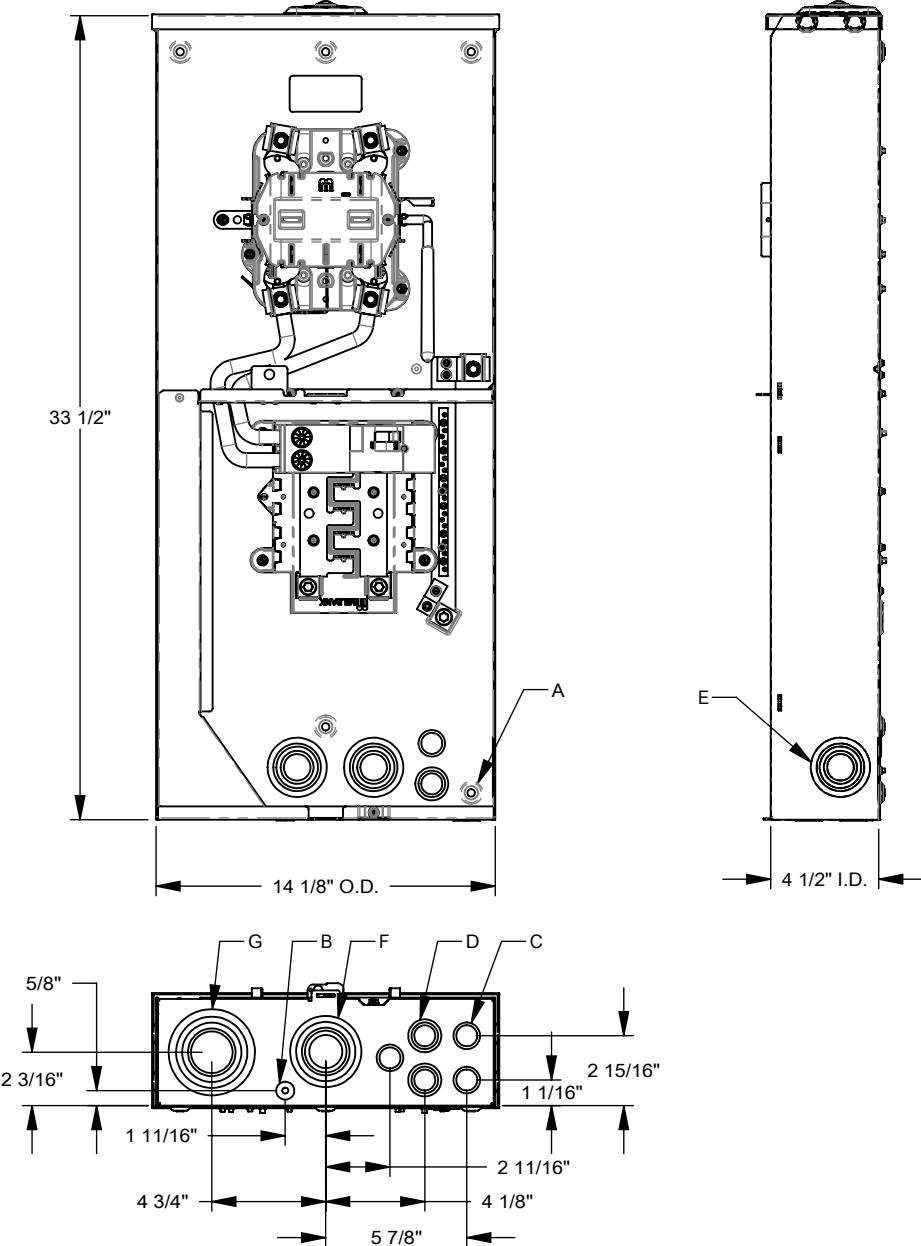

All dimensions are +/- 1/16".  
Drawing views are not to scale.

Version:

1

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.