




U9865-RXL-2/K1-ALT

200 Amps | 4 Terminals | Ringless | Alliant Approved



U9865-RXL-2/K1-ALT

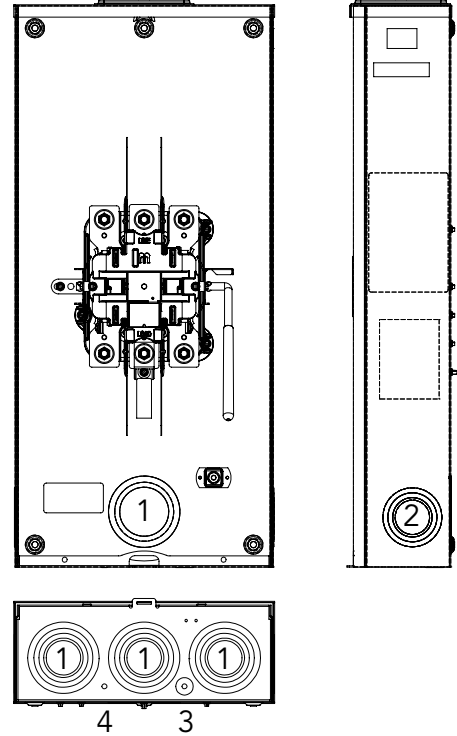

200 Amps | 4 Terminals | Meter Main Pedestal | Ringless

Catalog Number	Service	Connectors CU/AL		Bypass	Dimensions			Knockouts			
		Line	Load		D"	W"	H"	1	2	3	4
U9865-RXL-2/K1-ALT	OH/UG	#6-350 kcmil	#6-350 kcmil	Lever	4 ^{27/32}	13	28 ^{1/4}	3	2 ^{1/2}	1/4, 1/2	1/4

Specifications & Features

- UL listed
- Lever supplies clamping action on meter spades and also operates bypass device
- Installed lugs on line and load sides, #6-350 kcmil.
- For field-installable fifth terminal, order catalog number **K3866**.
- 200 Amps maximum, 600 VAC, single phase, three wire, ringless meter socket
- NEMA 3R construction for durable outdoor use — lockable and sealable
- Milbank gray polyester powder coat finish
- Wire terminations accept copper or aluminum conductors
- Line & neutral: (2) #6-350 kcmil per phase
- Line ground: (4) #14-1/0



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

