





U5844-PXL-100-KK




Catalog Number	U5844-PXL-100-KK	Insulation	Glass Polyester
Marketing Product Description	4 Terminal Ringless Small Closing Plate Pack Inside Meter Socket 1-100 Ampere Main Breaker KK Bypass	Mounting	Surface Mount
UPC	784572643970	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Length (IN)	4.5	Jaw Quantity	4 Terminal
Width (IN)	14.01	Bypass Type	Horn Bypass
Height (IN)	30	Number of Meter Positions	1 Position
Brand Name	Milbank	Equipment Ground	2 Barrel Ground Lug
Type	Ringless Meter Socket	Hub Opening	Small Closing Plate
Application	Meter Socket With Main	Line Side Wire Range	6 AWG - 350 kcmil
Standard	UL Listed; Type 3R	Load Side Wire Range	1 AWG - 300 kcmil
Voltage Rating	Up to 240 Volts Alternating Current	Number Of Receptacles	0
Amperage Rating	200 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.5L x 14.01W x 30H		
Number Of Cutouts	1		
Cutout Size	One 200 Ampere Main Breaker		
Cable Entry	Overhead and Underground and Side Wireway		
Terminal	Lay in		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

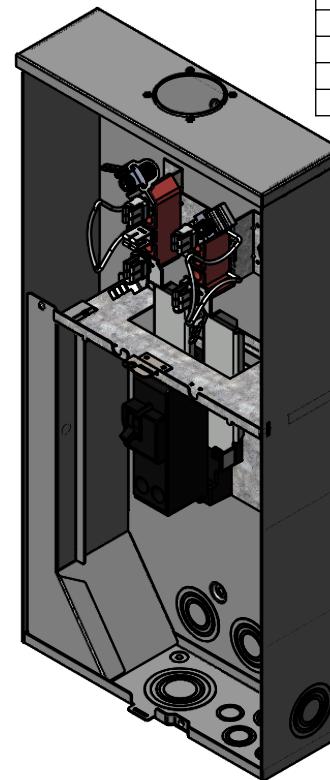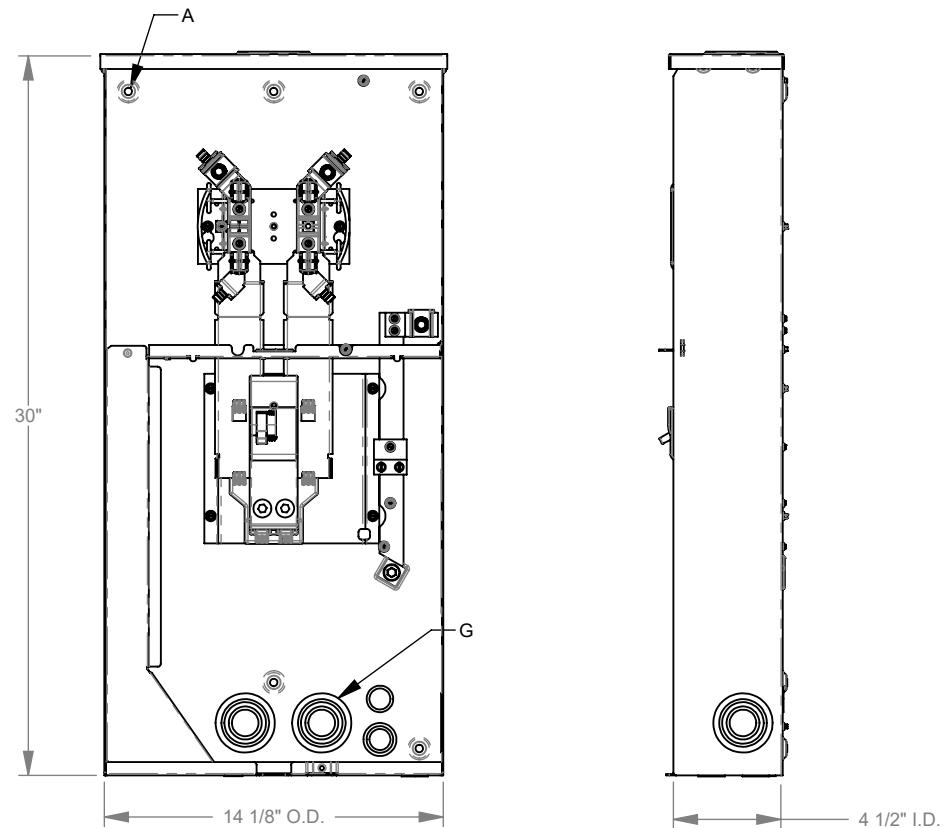

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	6	U/L MNTG.EMBOSS
B	1	1/4, 1/2 CONC. K.O.
C	4	1/2, 3/4 CONC. K.O.
D	3	1/2, 3/4, 1 CONC. K.O.
E	1	1, 1 1/4, 1 1/2, 2, 2 1/2 CONC. K.O.
F	1	1 1/4, 1 1/2, 2, 2 1/2, 3 CONC. K.O.
G	3	3/4, 1, 1 1/4, 1 1/2, 2 CONC. K.O.

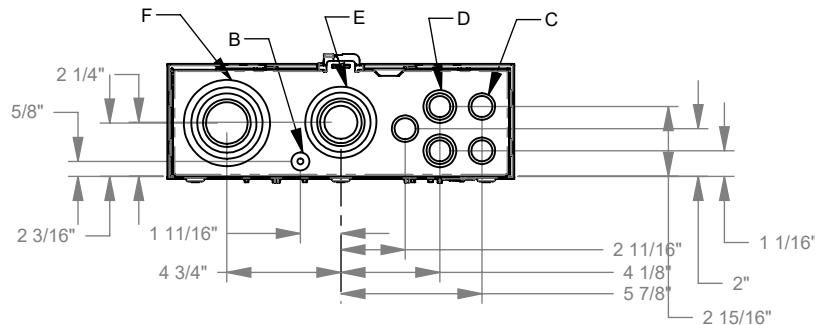

Version:

1

All dimensions are +/- 1/16".
Drawing views are not to scale.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.