



MILBANK
ENERGY AT WORK




U6012-XL-200




| | |
|-------------------------------|--|
| Catalog Number | U6012-XL-200 |
| Marketing Product Description | 4 Terminal Ringless Small Closing Plates Lever Bypass 1-200 Ampere Main Breaker 8 Branch Circuit 14.13 In X 39.25 In X 4.5 In |
| UPC | 784572646810 |
| Length (IN) | 4.5 |
| Width (IN) | 14.13 |
| Height (IN) | 39.25 |
| Brand Name | Milbank |
| Type | Ringless Meter Socket |
| Application | Meter Socket With Main And Load Center |
| Standard | UL Listed;Type 3R |
| Voltage Rating | 120/240 Volts Alternating Current |
| Amperage Rating | 200 Continuous Ampere |
| Phase | 1 Phase |
| Frequency Rating | 60 Hertz |
| Size | 4.5L x 14.13W x 39.25H |
| Number Of Cutouts | 1 |
| Cutout Size | One 200 Ampere Main Breaker |
| Cable Entry | Overhead or Underground |
| Terminal | 3/8 Inch Stud |

| | |
|---------------------------|--|
| Insulation | No Insulation |
| Mounting | Surface Mount |
| Enclosure | G90 Galvanized Steel with Powder Coat Finish |
| Jaw Quantity | 4 Terminal |
| Bypass Type | Lever Bypass |
| Number of Meter Positions | 1 Position |
| Equipment Ground | Ground Bar |
| Hub Opening | Small Closing Plate |
| Number Of Receptacles | 0 |

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

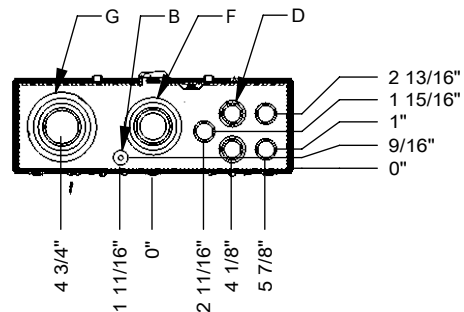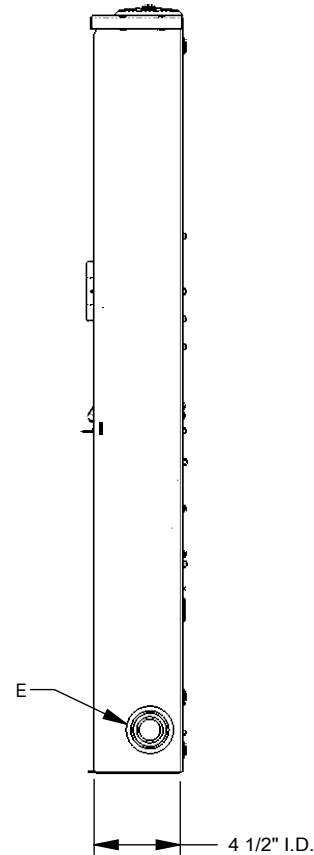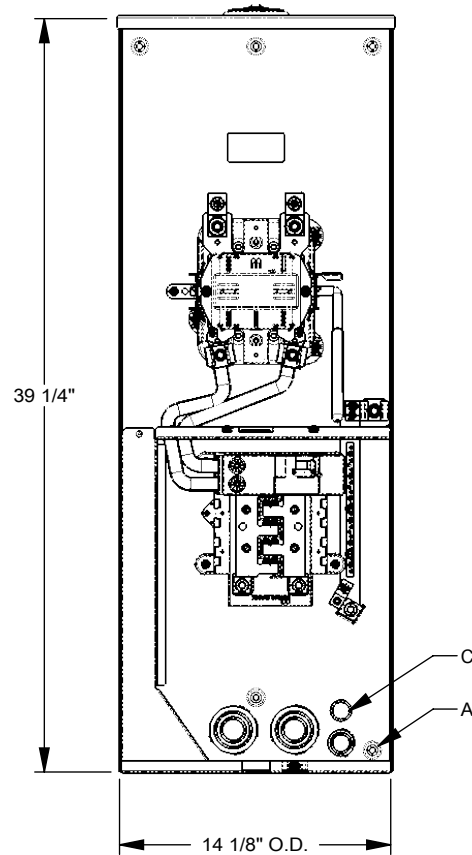

| FEATURE TABLE | | |
|---------------|-----|--------------------------------------|
| ITEM | QTY | DESCRIPTION |
| A | 6 | U/L MNTG.EMBOSS |
| B | 1 | 1/4, 1/2 CONC. K.O. |
| C | 3 | 1/2, 3/4 CONC. K.O. |
| D | 3 | 1/2, 3/4, 1 CONC. K.O. |
| E | 4 | 3/4, 1, 1 1/4, 1 1/2, 2 CONC. K.O. |
| F | 1 | 1, 1 1/4, 1 1/2, 2, 2 1/2 CONC. K.O. |
| G | 1 | 1 1/4, 1 1/2, 2, 2 1/2, 3 CONC. K.O. |

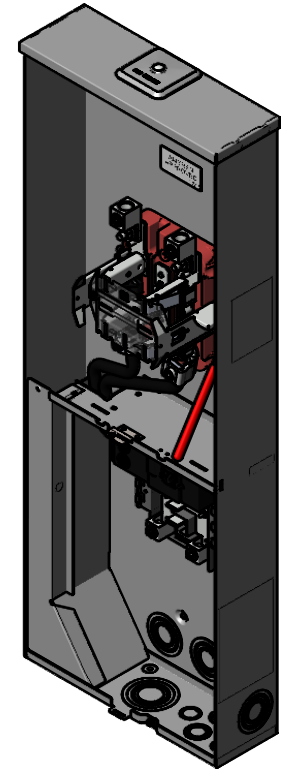

Version:

1

All dimensions are +/- 1/16".
Drawing views are not to scale.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.