



**MILBANK**  
ENERGY AT WORK

## U5168-XL-200-BL-NE



Catalog Number	U5168-XL-200-BL-NE	Terminal	Lay in
Marketing Product Description	4 Terminal Ringless Small Closing Plate 1-200 Ampere Main Breaker 8 Circuit Loadcenter 9-16 In Barrel Lock With Bracket Provision	Insulation	Glass Polyester
UPC	784572727236	Mounting	Surface Mount
Length (IN)	4.5	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Width (IN)	14.125	Jaw Quantity	4 Terminal
Height (IN)	32.375	Bypass Type	No Bypass
Brand Name	Milbank	Number of Meter Positions	1 Position
Type	Ringless Meter Socket	Equipment Ground	Ground Bar
Application	Meter Socket With Main And Load Center	Hub Opening	Small Closing Plate
Standard	UL Listed;Type 3R	Line Side Wire Range	6 AWG - 350 kcmil
Voltage Rating	Up to 240 Volts Alternating Current	Load Side Wire Range	6 AWG - 350 kcmil
Amperage Rating	200 Continuous Ampere	Barrel Lock Provision	9/16 Inch Knockout and Angle Bracket for Barrel Lock Provision
Phase	1 Phase	Number Branch Circuits	8
Frequency Rating	60 Hertz	Number Of Receptacles	0
Size	4.5L x 14.125W x 32.375H		
Number Of Cutouts	1		
Cutout Size	One 200 Ampere Main Breaker		
Cable Entry	Overhead or Underground		





Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



**MILBANK**<sup>®</sup>  
ENERGY AT WORK

---

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	6	U/L MNTG.EMBOSS
B	1	¼, ½ CONC. K.O.
C	4	½, ¾ CONC. K.O.
D	3	½, ¾, 1 CONC. K.O.
E	3	¾, 1, 1¼, 1½, 2 CONC. K.O.
F	1	1, 1¼, 1½, 2, 2½ CONC. K.O.
G	1	1¼, 1½, 2, 2½, 3 CONC. K.O.

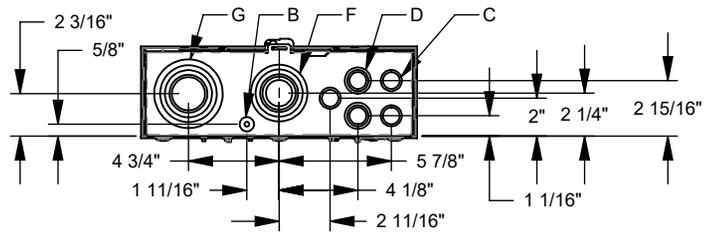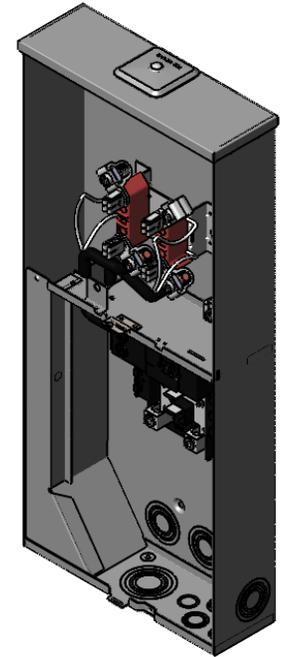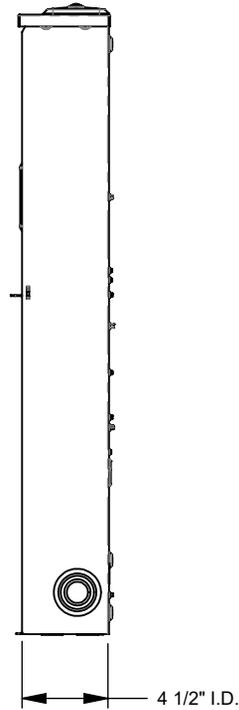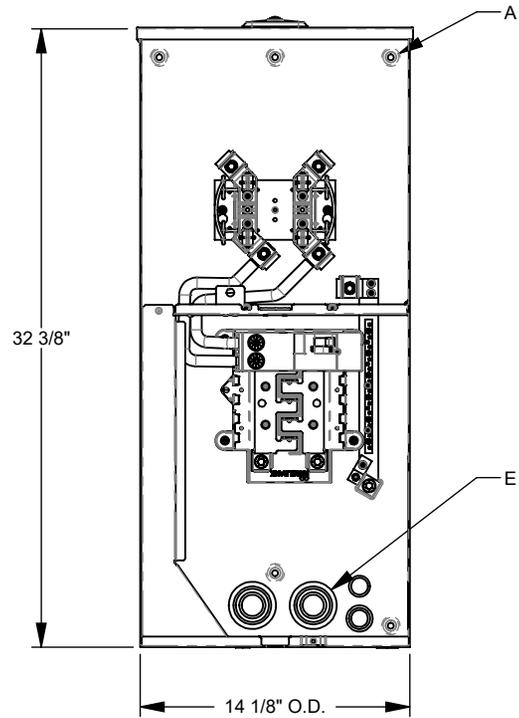

Version:

**1**

**All dimensions are +/- 1/16".  
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.