




# 400 Amps Meter Mains

*Single- and Three-Phase*

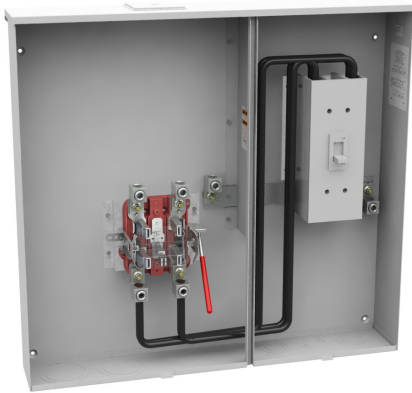

U6227-X-400-K3L



U6230-X-400-K7



U6056-X-2/200-K7L

## Features

- **Safe and Secure**
  - Barrel lock provision (optional)
  - Easy outside access to main service disconnect in case of emergency
- **Easy Installation**
  - All-in-one enclosure reduces installation time, labor and errors
  - Wall hanging brackets included
  - Overhead/underground service entry
  - Accepts 3", 3 1/2" or 4" hub for overhead applications
- Field-installable fifth terminal available (single phase only; **K3865**)
- **Durable Enclosure**
  - NEMA 3R rated
  - Galvanized steel, powder-coated paint protects against corrosion
- **Ideal Applications**
  - Large homes
  - Small office and commercial buildings
- **Heavy Duty Lever Bypass Meter Socket**
- **One 400 Amps Breaker**
  - 1Ø or 3Ø units available
- **UL-listed**
- **Made in the USA**

## Additional Features - U6056 and U6515

- Two 200 Amps breakers
- **U6416** is side bussed

## Common Applications



Large Homes



Small Office & Commercial Buildings

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.





# 400 Amps Meter Mains

Single- and Three-Phase

400 Amps | Meter Mains | 4-5 Terminals | 1Ø3W | 240V

| Catalog Number      | Terminals | Service | Hub  | Connectors CU/AL                 | Dimensions |     |    | Knockouts |    |   |   |
|---------------------|-----------|---------|------|----------------------------------|------------|-----|----|-----------|----|---|---|
|                     |           |         |      | Line                             | D"         | W"  | H" | 1         | 2  | 3 | 4 |
| U6227-X-400-K3L     | 4         | OH/UG   | C.P. | #4-600 kcmil or<br>(2) 1/0 - 250 | 6          | 36¼ | 34 | 4         | 2½ | ½ | ¼ |
| U6227-X-400-K3L-5T6 | 5         | OH/UG   | C.P. | #4-600 kcmil or<br>(2) 1/0 - 250 | 6          | 36¼ | 34 | 4         | 2½ | ½ | ¼ |
| U6227-X-400-K3L-5T9 | 5         | OH/UG   | C.P. | #4-600 kcmil or<br>(2) 1/0 - 250 | 6          | 36¼ | 34 | 4         | 2½ | ½ | ¼ |
| U6228-X-400-K3L     | 4         | OH/UG   | C.P. | #4-600 kcmil or<br>(2) 1/0 - 250 | 6          | 36¼ | 34 | 4         | 2½ | ½ | ¼ |
| U6228-X-400-K3L-5T6 | 5         | OH/UG   | C.P. | #4-600 kcmil or<br>(2) 1/0 - 250 | 6          | 36¼ | 34 | 4         | 2½ | ½ | ¼ |
| U6228-X-400-K3L-5T9 | 5         | OH/UG   | C.P. | #4-600 kcmil or<br>(2) 1/0 - 250 | 6          | 36¼ | 34 | 4         | 2½ | ½ | ¼ |

## Specifications

- **Side-bussed units:** U6228 is a side-bussed unit.
- **AIC Rating:** 22K AIC at 240V.
- **300 Amps breaker:** Can be installed from the factory (upon request)

400 Amps | Meter Mains | 7 Terminals | 3Ø4W | 120/208V

| Catalog Number  | Service | Hub  | Connectors CU/AL                 | Dimensions |     |    | Knockouts |    |   |   |
|-----------------|---------|------|----------------------------------|------------|-----|----|-----------|----|---|---|
|                 |         |      | Line                             | D"         | W"  | H" | 1         | 2  | 3 | 4 |
| U6229-X-400-K7L | OH/UG   | C.P. | #4-600 kcmil or<br>(2) 1/0 - 250 | 6          | 36¼ | 34 | 4         | 2½ | ½ | ¼ |
| U6230-X-400-K7L | OH/UG   | C.P. | #4-600 kcmil or<br>(2) 1/0 - 250 | 6          | 36¼ | 34 | 4         | 2½ | ½ | ¼ |

400 Amps | Meter Mains with (2) 200 Amps Breakers | 7 Terminal | 3Ø4W | Ringless | 480V

| Catalog Number    | Service | Hub  | Connectors CU/AL                 | Dimensions |     |    | Knockouts |    |   |   |
|-------------------|---------|------|----------------------------------|------------|-----|----|-----------|----|---|---|
|                   |         |      | Line                             | D"         | W"  | H" | 1         | 2  | 3 | 4 |
| U6056-X-2/200-K7L | OH/UG   | C.P. | #4-600 kcmil or<br>(2) 1/0 - 250 | 7          | 36¼ | 34 | 4         | 2½ | ½ | ¼ |
| U6515-X-2/200-K7L | OH/UG   | C.P. | #4-600 kcmil or<br>(2) 1/0 - 250 | 7          | 34¼ | 34 | 4         | 2½ | ½ | ¼ |

## Specifications

- **Side Bussed Units:** U6230 and U6515 are side-bussed units.
- **AIC Rating:** 22K AIC at 240V. And 10K AIC at 480V.
- **300 Amps breaker:** Can be installed from the factory (upon request).

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

