



U5844-PXL-200-KK-BLG

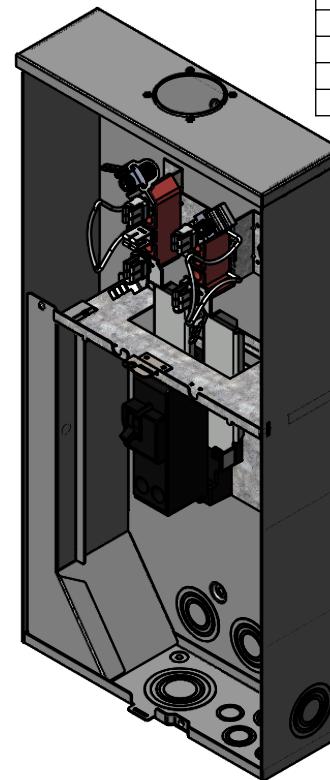


| | | | |
|-------------------------------|--|---------------------------|--|
| Catalog Number | U5844-PXL-200-KK-BLG | Insulation | Glass Polyester |
| Marketing Product Description | 4 Terminal Ringless Small Closing Plate Pack Inside Meter Socket Horn Bypass 1-200 Ampere Main Breaker 7-8 In Barrel Lock With Bracket Provision | Mounting | Surface Mount |
| UPC | 784572742918 | Enclosure | G90 Galvanized Steel with Powder Coat Finish |
| Length (IN) | 4.5 | Jaw Quantity | 4 Terminal |
| Width (IN) | 14.01 | Bypass Type | Horn Bypass |
| Height (IN) | 30 | Number of Meter Positions | 1 Position |
| Brand Name | Milbank | Equipment Ground | 2 Barrel Ground Lug |
| Type | Ringless Meter Socket | Hub Opening | Small Closing Plate Included Inside Meter Socket |
| Application | Meter Socket With Main | Line Side Wire Range | 6 AWG - 350 kcmil |
| Standard | UL Listed; Type 3R | Load Side Wire Range | 1 AWG - 300 kcmil |
| Voltage Rating | Up to 240 Volts Alternating Current | Barrel Lock Provision | 9/16 Inch Knockout and Angle Bracket for Barrel Lock Provision |
| Amperage Rating | 200 Continuous Ampere | Number Of Receptacles | 0 |
| Phase | 1 Phase | | |
| Frequency Rating | 60 Hertz | | |
| Size | 4.5L x 14.01W x 30H | | |
| Number Of Cutouts | 1 | | |
| Cutout Size | One 200 Ampere Main Breaker | | |
| Cable Entry | Overhead or Underground | | |
| Terminal | Lay in | | |

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

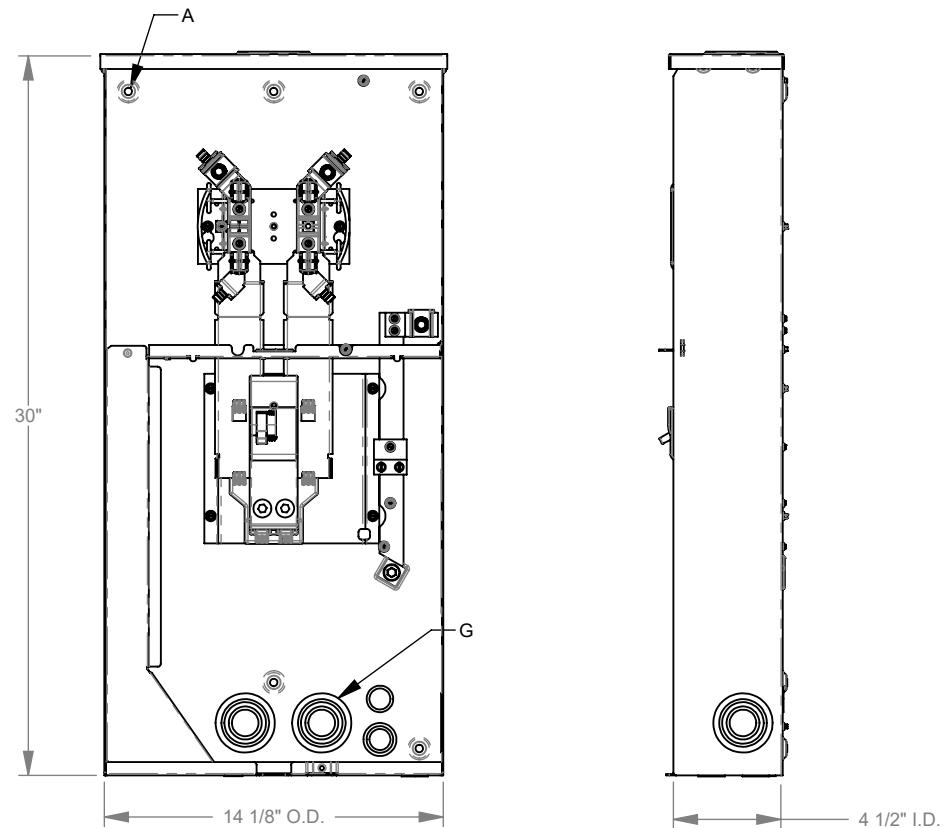

| FEATURE TABLE | | |
|---------------|-----|--------------------------------------|
| ITEM | QTY | DESCRIPTION |
| A | 6 | U/L MNTG.EMBOSS |
| B | 1 | 1/4, 1/2 CONC. K.O. |
| C | 4 | 1/2, 3/4 CONC. K.O. |
| D | 3 | 1/2, 3/4, 1 CONC. K.O. |
| E | 1 | 1, 1 1/4, 1 1/2, 2, 2 1/2 CONC. K.O. |
| F | 1 | 1 1/4, 1 1/2, 2, 2 1/2, 3 CONC. K.O. |
| G | 3 | 3/4, 1, 1 1/4, 1 1/2, 2 CONC. K.O. |

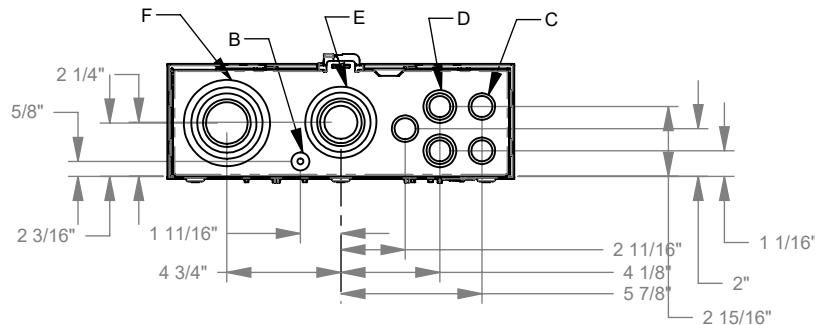

Version:

1

All dimensions are +/- 1/16".
Drawing views are not to scale.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.