




# Evergy Approved Products for KCP&L/Westar Service Areas

## Single Position Meter Sockets

100-320 Amps | UL Listed

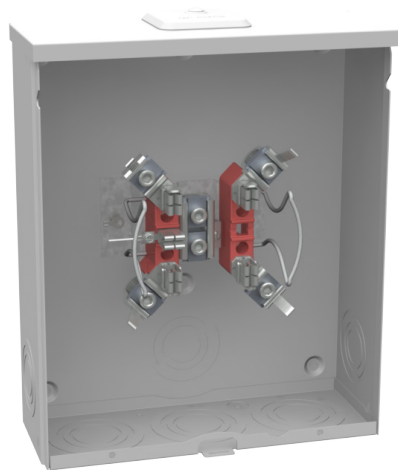

U7043-XL-TG-KK-IL-5T9W



U9551-RXL-5T9-IL



U4013-X-2/K7-IL

### 100 & 200 Amps | 5 Terminals | Horn Bypass | Residential

| Catalog Number           | Amps | Phase        | Application | Dimensions                      |    |     |
|--------------------------|------|--------------|-------------|---------------------------------|----|-----|
|                          |      |              |             | D"                              | W" | H"  |
| ■ U7043-XL-TG-KK-IL-5T9W | 100  | 1Ø3W or 3Ø3W | OH/UG       | 4 <sup>21</sup> / <sub>25</sub> | 13 | 15½ |
| ■ U7043-XL-TG-KK-IL-5T9W | 200  | 1Ø3W or 3Ø3W | OH/UG       | 4 <sup>21</sup> / <sub>25</sub> | 13 | 15½ |

### 200 Amps | Lever Bypass | Commercial

| Catalog Number     | Amps | Phase        | Application | Dimensions                      |    |    |
|--------------------|------|--------------|-------------|---------------------------------|----|----|
|                    |      |              |             | D"                              | W" | H" |
| ■ U9551-RXL-5T9-IL | 200  | 1Ø3W or 3Ø3W | OH/UG       | 4 <sup>21</sup> / <sub>25</sub> | 13 | 19 |
| ■ U9701-XL-IL-EVE  | 200  | 3Ø4W         | OH/UG       | 4 <sup>21</sup> / <sub>25</sub> | 13 | 19 |

### 320 Amps | Lever Bypass | Commercial & Residential

| Catalog Number                      | Amps | Phase        | Application | Dimensions                      |     |     |
|-------------------------------------|------|--------------|-------------|---------------------------------|-----|-----|
|                                     |      |              |             | D"                              | W"  | H"  |
| ■ U4702-X-5T9-K3-K2-IL <sup>1</sup> | 320  | 1Ø3W or 3Ø3W | OH/UG       | 4 <sup>21</sup> / <sub>25</sub> | 15  | 28¼ |
| ■ U4013-X-2/K7-IL                   | 320  | 3Ø4W         | OH/UG/SW    | 6½                              | 17¾ | 40½ |

### Notes

- **Connectors:** Extruded aluminum connectors are tin plated. **U9551** unit includes removable bonding strap for isolated neutral.
- Stocked item (availability subject to change).
- <sup>1</sup> Max. line side conductor size is (1) or (2) 250 kcmil.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



# Multi-Position Meter Sockets & Meter Mains

150-200 Amps | UL Listed



U1232-X-5T-K1

## Horizontal Gang Sockets

| Application            | Catalog Number             |
|------------------------|----------------------------|
| 2 gang, 100 Amps, 3W   | U1232-X-5T-K1 <sup>1</sup> |
| 3 gang, 100 Amps, 3W   | U1233-X-5T-K3 <sup>2</sup> |
| 4 gang, 100 Amps, 3W   | U1234-X-5T-K3 <sup>2</sup> |
| ■ 2 gang, 200 Amps, 3W | U1252-X-5T-K1 <sup>1</sup> |
| 3 gang, 200 Amps, 3W   | U1253-X-5T-K1 <sup>1</sup> |
| 4 gang, 200 Amps, 3W   | U1254-X-5T-K4 <sup>4</sup> |
| 5 gang, 200 Amps, 3W   | U1255-X-5T-K4 <sup>4</sup> |
| 6 gang, 200 Amps, 3W   | U1256-X-5T-K4 <sup>4</sup> |

## Notes

- **Connectors:** Extruded aluminum connectors are tin plated.  
Stocked item (availability subject to change).
- Use connector kits on line side only.
- <sup>1</sup> Single 350 kcmil line side connector only.
- <sup>2</sup> Single or twin 350 kcmil line side connector only.
- <sup>3</sup> Single 600 kcmil line side connector only.
- <sup>4</sup> Double 4-600 kcmil line side connector only.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

# Multi-Position Meter Mains

125-200 Amps | 5 Terminals | Ringless | 120/240V

NEC 2020 Compliant



U5902-X-KK-K3-5T-KCPL



U5882-X-KK-K3-5T-KCPL

## Breaker Chart

| Rating<br>kAIC | Circuit Breakers<br>125 Amps                                                                         |
|----------------|------------------------------------------------------------------------------------------------------|
| 10             | Siemens: QP.<br>Cutler Hammer: BR, HQP, QPGF<br>Square D/Homeline: GE (50 Amps max)<br>THQL, THQL-GF |
| 22             | Siemens: QPH                                                                                         |
| Rating<br>kAIC | 150-200 Amps                                                                                         |
| 10             | Siemens: QN                                                                                          |
| 22             | Siemens: QNH                                                                                         |

125 Amps per Position | 5 Terminals | Ringless | 120/240V | 22K AIC | Residential

| Catalog Number        | Positions | Service | Hub  | Connectors CU/AL           | Dimensions      |                   |    | Weight<br>(lbs.) |
|-----------------------|-----------|---------|------|----------------------------|-----------------|-------------------|----|------------------|
|                       |           |         |      | Line                       | D"              | W"                | H" |                  |
| U5902-X-KK-K3-5T-KCPL | 2         | OH/UG   | C.P. | #4-600MCM or (2)1/0 250MCM | 5 $\frac{1}{8}$ | 26 $\frac{1}{2}$  | 30 | 58               |
| U5903-X-KK-K3-5T-KCPL | 3         | OH/UG   | C.P. | #4-600MCM or (2)1/0 250MCM | 5 $\frac{1}{8}$ | 34 $\frac{5}{9}$  | 30 | 88               |
| U5904-X-KK-K3-5T-KCPL | 4         | OH/UG   | C.P. | #4-600MCM or (2)1/0 250MCM | 5 $\frac{1}{8}$ | 41 $\frac{4}{5}$  | 30 | 107              |
| U5905-X-KK-K3-5T-KCPL | 5         | OH/UG   | C.P. | #4-600MCM or (2)1/0 250MCM | 5 $\frac{1}{8}$ | 51 $\frac{1}{20}$ | 30 | 128              |
| U5906-X-KK-K3-5T-KCPL | 6         | OH/UG   | C.P. | #4-600MCM or (2)1/0 250MCM | 5 $\frac{1}{8}$ | 59 $\frac{3}{10}$ | 30 | 146              |

200 Amps per Position | 5 Terminals | Ringless | 120/240V | 22K AIC | Residential

| Catalog Number        | Positions | Service | Hub  | Connectors CU/AL           | Dimensions      |                   |    | Weight<br>(lbs.) |
|-----------------------|-----------|---------|------|----------------------------|-----------------|-------------------|----|------------------|
|                       |           |         |      | Line                       | D"              | W"                | H" |                  |
| U5882-X-KK-K3-5T-KCPL | 2         | OH/UG   | C.P. | #4-600MCM or (2)1/0 250MCM | 5 $\frac{1}{8}$ | 26 $\frac{1}{2}$  | 30 | 58               |
| U5883-X-KK-K3-5T-KCPL | 3         | OH/UG   | C.P. | #4-600MCM or (2)1/0 250MCM | 5 $\frac{1}{8}$ | 34 $\frac{5}{9}$  | 30 | 88               |
| U5884-X-KK-K3-5T-KCPL | 4         | OH/UG   | C.P. | #4-600MCM or (2)1/0 250MCM | 5 $\frac{1}{8}$ | 41 $\frac{4}{5}$  | 30 | 107              |
| U5885-X-KK-K3-5T-KCPL | 5         | OH/UG   | C.P. | #4-600MCM or (2)1/0 250MCM | 5 $\frac{1}{8}$ | 51 $\frac{1}{20}$ | 30 | 128              |
| U5886-X-KK-K3-5T-KCPL | 6         | OH/UG   | C.P. | #4-600MCM or (2)1/0 250MCM | 5 $\frac{1}{8}$ | 59 $\frac{3}{10}$ | 30 | 146              |

## Notes


- **AIC rating:** Rating is 22K AIC. Note, this rating is limited to the lowest interrupting capacity of any circuit breaker installed. Watthour meter not included in short circuit current rating.
- **Hub:** Units supplied with one closing plate. To order hubs separately, please contact your local Representative.
- **Line side connectors:** Socket is supplied with  $\frac{3}{8}$ " - 16 hex head nuts with Belleville washers. Separate lug kits are required for line side.
- **Load side connectors:** Dependant upon field-installed breaker.
- **Bypass:** The horn-type bypass is factory-installed. This permits changing and testing of the meter without interrupting customer service when used with utility-supplied jumpers.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




# Meter Mains & Meter Load Center Sockets


100-200 Amps | UL Listed

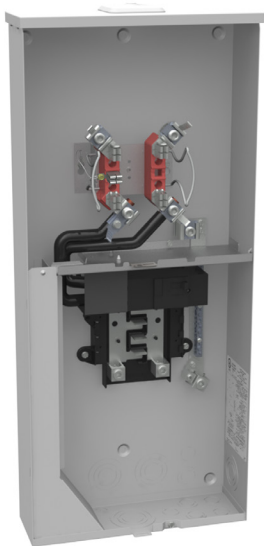

U5168XL200KKIL5T9WEVE

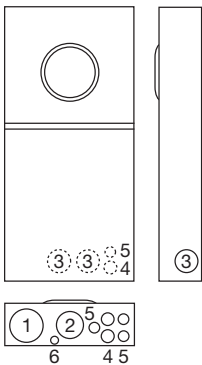

### Generator Interlock



**K5815**  
Large **QN**  
with small  
frame **Q**

**K5820**  
Large frame  
**QN** with large  
from **QN**

**K5830**  
Small frame  
**Q** to small  
frame **Q**

Meter Mains | 100-200 Amps | 5 Terminals | Horn Bypass | Residential | 120/240 VAC | 1Ø3W | 22K AIC

| Catalog Number          | Amps | Phase | Load Center                 | Application | Dimensions |     |     |
|-------------------------|------|-------|-----------------------------|-------------|------------|-----|-----|
|                         |      |       |                             |             | D"         | W"  | H"  |
| ■ U5168XL100KKIL5T9WEVE | 100  | 1Ø3W  | 10 (with feed-through lugs) | OH/UG       | 4½         | 14⅞ | 32⅜ |
| U5168XL150KKIL5T9WEVE   | 150  | 1Ø3W  | 8 (with feed-through lugs)  | OH/UG       | 4½         | 14⅞ | 32⅜ |
| ■ U5168XL200KKIL5T9WEVE | 200  | 1Ø3W  | 8 (with feed-through lugs)  | OH/UG       | 4½         | 14⅞ | 32⅜ |

### Notes

- **Interlock Kit:** For generator auxiliary circuit breaker interlock, order **K5815** for large **QNR** with small frame **Q**; order **K5820** for large frame **QNR** with large frame **QNR**; order **K5830** for small frame **Q** to small frame **Q**.
- **Sub Feed Lugs:** #6-350 sub feed lugs provided.
- **Hubs:** Units are supplied with closing plate. Order hubs separately.
- Stocked item (availability subject to change).

### Branch Breaker Chart

| AIC Rating | Amps    | Main Breaker | Siemens | Eaton               | Square D | GE (50 Amps Max) |
|------------|---------|--------------|---------|---------------------|----------|------------------|
| 10K        | 150-200 | Siemens QNR  | —       | —                   | —        | —                |
|            | <150    | Siemens QP   | QPH, QP | BR, HQP, QPHW, QPGF | Homeline | THQL, THQL-GF    |
| 22K        | 150-200 | Siemens QNRH | —       | —                   | —        | —                |
|            | <125    | Siemens QPH  | QPH, QP | —                   | —        | —                |



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

# Meter Mains & Meter Load Center Sockets

100-320 Amps | UL-Listed | NEC 2020 Compliant

## Meter Mains | 100-200 Amps | Heavy Duty Lever Bypass | Commercial | 1Ø3W

| Catalog Number             | Amps | Phase | Load Center                 | Application | Dimensions                    |    |    | AIC |
|----------------------------|------|-------|-----------------------------|-------------|-------------------------------|----|----|-----|
|                            |      |       |                             |             | D"                            | W" | H" |     |
| U3791NRXL100IL5T9WEVE      | 100  | 1Ø3W  | N/A (main breaker only)     | OH/UG       | 4 <sup>7</sup> / <sub>8</sub> | 13 | 34 | 10K |
| U3791NRXL150IL5T9WEVE      | 150  | 1Ø3W  | N/A (main breaker only)     | OH/UG       | 4 <sup>7</sup> / <sub>8</sub> | 13 | 34 | 10K |
| ■ U3791NRXL200IL5T9WEVE    | 200  | 1Ø3W  | N/A (main breaker only)     | OH/UG       | 4 <sup>7</sup> / <sub>8</sub> | 13 | 34 | 10K |
| U6281-XL-100-IL-5T9W-EVE   | 100  | 1Ø3W  | 10 (with feed-through lugs) | OH/UG       | 4 <sup>1</sup> / <sub>2</sub> | 14 | 34 | 22K |
| U6281-XL-150-IL-5T9W-EVE   | 150  | 1Ø3W  | 8 (with feed-through lugs)  | OH/UG       | 4 <sup>1</sup> / <sub>2</sub> | 14 | 34 | 22K |
| ■ U6281-XL-200-IL-5T9W-EVE | 200  | 1Ø3W  | 8 (with feed-through lugs)  | OH/UG       | 4 <sup>1</sup> / <sub>2</sub> | 14 | 34 | 22K |

## Meter Mains | 150-200 Amps | Heavy Duty Lever Bypass | Commercial | 3Ø4W - 240 VAC

| Catalog Number         | Amps | Load Center             | Application | Dimensions                    |                                |    | AIC |
|------------------------|------|-------------------------|-------------|-------------------------------|--------------------------------|----|-----|
|                        |      |                         |             | D"                            | W"                             | H" |     |
| U5750-RXL-150-IL-EVE   | 150  | N/A (main breaker only) | OH/UG       | 5 <sup>3</sup> / <sub>4</sub> | 17 <sup>3</sup> / <sub>4</sub> | 34 | 10K |
| ■ U5750-RXL-200-IL-EVE | 200  | N/A (main breaker only) | OH/UG       | 5 <sup>3</sup> / <sub>4</sub> | 17 <sup>3</sup> / <sub>4</sub> | 34 | 10K |

## Meter Mains | 320 Amps | Heavy Duty Lever Bypass | 1Ø3W | OH/UG

| Catalog Number              | Amps | Phase | Breakers   | Load Centers                | VAC | Dimensions                    |                                |    | AIC |
|-----------------------------|------|-------|------------|-----------------------------|-----|-------------------------------|--------------------------------|----|-----|
|                             |      |       |            |                             |     | D"                            | W"                             | H" |     |
| ■ U6585X2200K3L5T9WILEVE    | 320  | 1Ø3W  | (2) X 200A | N/A (main breakers only)    | 240 | 4 <sup>7</sup> / <sub>8</sub> | 15                             | 42 | 22K |
| ■ U6601-X-2/200-K3L-5T9-EVE | 320  | 1Ø3W  | (2) X 200A | N/A (main breakers only)    | 240 | 6                             | 24 <sup>1</sup> / <sub>2</sub> | 35 | 22K |
| ■ U6602-X-2/200-K3L-5T9-EVE | 320  | 1Ø3W  | (2) X 200A | 10 (with feed-through lugs) | 240 | 6                             | 29 <sup>1</sup> / <sub>2</sub> | 35 | 22K |
| U5892X2200K3LIL5T9WEVE      | 320  | 1Ø3W  | (2) X 200A | 22 (with feed-through lugs) | 240 | 6                             | 29 <sup>1</sup> / <sub>2</sub> | 35 | 22K |
| U6227X400K3LIL5T9WEVE       | 320  | 1Ø3W  | 400A       | N/A (main breaker only)     | 480 | 6                             | 36 <sup>1</sup> / <sub>4</sub> | 34 | *   |

## Meter Mains | 320 Amps | Heavy Duty Lever Bypass | 3Ø4W | OH/UG

| Catalog Number             | Amps | Phase | Breakers   | Load Centers             | VAC | Dimensions |                                |    | AIC |
|----------------------------|------|-------|------------|--------------------------|-----|------------|--------------------------------|----|-----|
|                            |      |       |            |                          |     | D"         | W"                             | H" |     |
| ■ U6056-X-2/200-K7L-IL-EVE | 320  | 3Ø4W  | (2) X 200A | N/A (main breakers only) | 480 | 7          | 37 <sup>1</sup> / <sub>4</sub> | 34 | *   |
| ■ U6229-X-400-K7L-IL-EVE   | 320  | 3Ø4W  | 400A       | N/A (main breaker only)  | 480 | 6          | 36 <sup>1</sup> / <sub>4</sub> | 34 | *   |

## Notes

- **Hubs:** Units are supplied with closing plate. Order hubs separately.
- **Branch Breakers:** Refer to breaker chart on previous page.
- **AIC Rating:** U6227, U6115 and U6229 are rated for 240 VAC with a 22K AIC rating or 480 VAC with 10K AIC rating.
- Stocked item (availability subject to change).

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



# Meter Mains & Load Center Pedestals

100-200 Amps | UL-Listed | *NEC 2020 Compliant*

## Meter Mains and Meter Load Center Pedestals | Horn Bypass | Residential

| Catalog Number             | Amps                 | Phase | Load Center | Application | Dimensions                     |                                |    | AIC |
|----------------------------|----------------------|-------|-------------|-------------|--------------------------------|--------------------------------|----|-----|
|                            |                      |       |             |             | D"                             | W"                             | H" |     |
| U5136-O-100S-IL-5T9W-EVE   | 100                  | 1Ø3W  | 4           | UG          | 4 <sup>1</sup> / <sub>8</sub>  | 9 <sup>1</sup> / <sub>16</sub> | 80 | 22K |
| ■ U5136-O-200S-IL-5T9W-EVE | 200                  | 1Ø3W  | 4           | UG          | 4 <sup>1</sup> / <sub>8</sub>  | 9 <sup>1</sup> / <sub>16</sub> | 80 | 22K |
| U5137-O-100S-IL-5T9W-EVE   | 100 each (twin head) | 1Ø3W  | 4           | UG          | 4 <sup>1</sup> / <sub>8</sub>  | 9 <sup>1</sup> / <sub>16</sub> | 80 | 22K |
| U5137-O-200S-IL-5T9W-EVE   | 200 each (twin head) | 1Ø3W  | 4           | UG          | 4 <sup>1</sup> / <sub>8</sub>  | 9 <sup>1</sup> / <sub>16</sub> | 80 | 22K |
| U5925O100KKIL5T9EVE        | 100                  | 1Ø3W  | 10          | UG          | 3 <sup>7</sup> / <sub>16</sub> | 14                             | 78 | —   |
| U5925O200KKIL5T9EVE        | 200                  | 1Ø3W  | 8           | UG          | 3 <sup>7</sup> / <sub>16</sub> | 14                             | 78 | —   |

### Notes

- **Parallel to Series Conversion:** For field converting from parallel wired to series wired, order **K5194**.
- **Stabilizer Foot:** For field-installable stabilizer foot, order **K5415**.
- **Receptacles:** Consult factory for installed receptacle assemblies.
- **Short Circuit Current Rating:** 22K AIC. However, this rating is limited to the lowest interrupting capacity of any circuit breaker installed. Watt-hour meter not included in SCCR.
- **Receptacle Bridge:** Order separately, part **K5400-BRIDGE-2POS**.
- **Extension:** For 18-inch stake wireway extension for **U5925** pedestals, order **K6417**.
- Stocked item (availability subject to change).

## Meter Mains and Meter Load Center Pedestals | Horn Bypass | Residential

| Catalog Number         | Amps | Phase | Load Center | Application | Dimensions                    |                                |    | AIC |
|------------------------|------|-------|-------------|-------------|-------------------------------|--------------------------------|----|-----|
|                        |      |       |             |             | D"                            | W"                             | H" |     |
| U6220O100KKIL5T9WEVE   | 100  | 1Ø3W  | 10          | UG          | 4 <sup>1</sup> / <sub>8</sub> | 9 <sup>1</sup> / <sub>16</sub> | 80 | 22K |
| ■ U6220O200KKIL5T9WEVE | 200  | 1Ø3W  | 8           | UG          | 4 <sup>1</sup> / <sub>8</sub> | 9 <sup>1</sup> / <sub>16</sub> | 80 | 22K |

### Notes

- **GFCI:** Comes with 20 Amps GFCI installed.
- **Receptacles:** Installed in the deadfront.
- Stocked item (availability subject to change).

## Meter Mains and Meter Load Center Pedestals | Heavy Duty Lever Bypass | Commercial | 22K AIC

| Catalog Number          | Amps | Phase | Load Center | Application | Dimensions                    |                                |    | AIC |
|-------------------------|------|-------|-------------|-------------|-------------------------------|--------------------------------|----|-----|
|                         |      |       |             |             | D"                            | W"                             | H" |     |
| U6221-O-100-IL-5T9W-EVE | 100  | 1Ø3W  | 10          | UG          | 4 <sup>3</sup> / <sub>4</sub> | 9 <sup>1</sup> / <sub>16</sub> | 80 | 22K |
| U6221-O-200-IL-5T9W-EVE | 200  | 1Ø3W  | 8           | UG          | 4 <sup>3</sup> / <sub>4</sub> | 9 <sup>1</sup> / <sub>16</sub> | 80 | 22K |

### Notes

- **GFCI:** Comes with 20 Amps GFCI installed.
- **Receptacles:** Installed in the deadfront.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

# Current Transformer Cabinets

## Overhead Service Entry

### Highlights and Features

- **Three-Point Latching Handle & Locking Mechanism:** Padlocking handle with three-point latching system allows for easy locking and securing of the unit.
- **Lugs:** Tin-plated aluminum, suitable for aluminum or copper conductors rated for 90°. Lugs are sized for #4-600 MCM on cabinets up to 1200A, and 1/0-750 MCM on cabinets 1600A and above. If different size lugs are required, please contact your local Manufacturers' representative.
- **Potential Tap:** Included on buss.
- **Grounding Lug:** Single position, 350 kcmil.
- Wind-stop latch
- Aluminum piano hinged door(s)
- Wall-mount brackets provided
- CT supports included
- Aluminum shell
- NEMA 3R rated for indoor or outdoor applications



### Current Transformer Cabinets | Overhead Service Entry


| Catalog Number | Amps | VAC | Service | Phase | Fault Current Rating | # of Lugs |      | Dimensions |    |                   | Hinged Doors |
|----------------|------|-----|---------|-------|----------------------|-----------|------|------------|----|-------------------|--------------|
|                |      |     |         |       |                      | Line      | Load | H"         | W" | D"                |              |
| KCPLM-813      | 800  | 600 | OH      | 1Ø3W  | 65,000 Amps          | 3         | 3    | 42         | 24 | 8½                | Single       |
| KCPLM-833      | 800  | 600 | OH      | 3Ø3W  | 65,000 Amps          | 3         | 3    | 42         | 24 | 8½                | Single       |
| KCPLM-834      | 800  | 600 | OH      | 3Ø4W  | 65,000 Amps          | 3         | 3    | 42         | 24 | 8½                | Single       |
| KCPLM-1233     | 1200 | 600 | OH      | 3Ø3W  | 85,000 Amps          | 4         | 4    | 48         | 36 | 14½ <sub>16</sub> | Single       |
| KCPLM-1234     | 1200 | 600 | OH      | 3Ø4W  | 85,000 Amps          | 4         | 4    | 48         | 36 | 14½ <sub>16</sub> | Single       |
| KCPLM-1633     | 1600 | 600 | OH      | 3Ø3W  | 85,000 Amps          | 5         | 5    | 60         | 38 | 16½ <sub>16</sub> | Single       |
| KCPLM-1634     | 1600 | 600 | OH      | 3Ø4W  | 85,000 Amps          | 5         | 5    | 60         | 38 | 16½ <sub>16</sub> | Single       |
| KCPLM-2033     | 2000 | 600 | OH      | 3Ø3W  | 85,000 Amps          | 6         | 6    | 66         | 42 | 14½ <sub>16</sub> | Double       |
| KCPLM-2034     | 2000 | 600 | OH      | 3Ø4W  | 85,000 Amps          | 6         | 6    | 66         | 42 | 14½ <sub>16</sub> | Double       |
| KCPLM-2533     | 2500 | 600 | OH      | 3Ø3W  | 85,000 Amps          | 7         | 7    | 72         | 42 | 20½ <sub>16</sub> | Double       |
| KCPLM-2534     | 2500 | 600 | OH      | 3Ø4W  | 85,000 Amps          | 7         | 7    | 72         | 42 | 20½ <sub>16</sub> | Double       |
| KCPLM-3033     | 3000 | 600 | OH      | 3Ø3W  | 85,000 Amps          | 8         | 8    | 72         | 42 | 20½ <sub>16</sub> | Double       |
| KCPLM-3034     | 3000 | 600 | OH      | 3Ø4W  | 85,000 Amps          | 8         | 8    | 72         | 42 | 20½ <sub>16</sub> | Double       |

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



# Current Transformer Cabinets

*Underground Service Entry | Underground Exit*

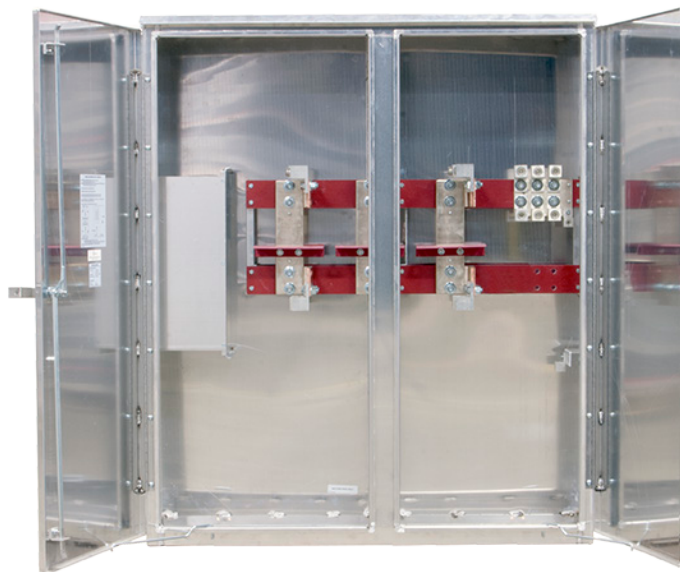

## Current Transformer Cabinets | Underground Service Entry | Underground Exit

| Catalog Number | Amps | VAC | Service | Phase | Fault Current Rating | # of Lugs |      | Dimensions |                                |                                  | Hinged Doors |
|----------------|------|-----|---------|-------|----------------------|-----------|------|------------|--------------------------------|----------------------------------|--------------|
|                |      |     |         |       |                      | Line      | Load | H"         | W"                             | D"                               |              |
| KCPLM-813UGBX  | 800  | 600 | UG      | 1Ø3W  | 65,000 Amps          | 3         | 3    | 48         | 36                             | 14 <sup>11</sup> / <sub>16</sub> | Single       |
| KCPLM-833UGBX  | 800  | 600 | UG      | 3Ø3W  | 65,000 Amps          | 3         | 3    | 48         | 36                             | 14 <sup>11</sup> / <sub>16</sub> | Single       |
| KCPLM-834UGBX  | 800  | 600 | UG      | 3Ø4W  | 65,000 Amps          | 3         | 3    | 48         | 36                             | 14 <sup>11</sup> / <sub>16</sub> | Single       |
| KCPLM-1233UGBX | 1200 | 600 | UG      | 3Ø3W  | 85,000 Amps          | 4         | 4    | 54         | 45 <sup>3</sup> / <sub>4</sub> | 14 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-1234UGBX | 1200 | 600 | UG      | 3Ø4W  | 85,000 Amps          | 4         | 4    | 54         | 45 <sup>3</sup> / <sub>4</sub> | 14 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-1633UGBX | 1600 | 600 | UG      | 3Ø3W  | 85,000 Amps          | 5         | 5    | 66         | 54                             | 14 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-1634UGBX | 1600 | 600 | UG      | 3Ø4W  | 85,000 Amps          | 5         | 5    | 66         | 54                             | 14 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-2033UGBX | 2000 | 600 | UG      | 3Ø3W  | 85,000 Amps          | 6         | 6    | 66         | 54                             | 14 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-2034UGBX | 2000 | 600 | UG      | 3Ø4W  | 85,000 Amps          | 6         | 6    | 66         | 54                             | 14 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-2533UGBX | 2500 | 600 | UG      | 3Ø3W  | 85,000 Amps          | 7         | 7    | 72         | 50                             | 20 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-2534UGBX | 2500 | 600 | UG      | 3Ø4W  | 85,000 Amps          | 7         | 7    | 72         | 50                             | 20 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-3033UGBX | 3000 | 600 | UG      | 3Ø3W  | 85,000 Amps          | 8         | 8    | 72         | 50                             | 20 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-3034UGBX | 3000 | 600 | UG      | 3Ø4W  | 85,000 Amps          | 8         | 8    | 72         | 50                             | 20 <sup>11</sup> / <sub>16</sub> | Double       |



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

# Evergy Approved Products for KCP&L/Westar Service Areas

## Current Transformer Cabinets

*Pad-mounted*



### Current Transformer Cabinets | Pad-mounted

| Catalog Number | Amps | VAC | Service | Phase | Fault Current Rating | # of Lugs |      | Dimensions |                                |                                  | Hinged Doors |
|----------------|------|-----|---------|-------|----------------------|-----------|------|------------|--------------------------------|----------------------------------|--------------|
|                |      |     |         |       |                      | Line      | Load | H"         | W"                             | D"                               |              |
| KCPLM-813PM    | 800  | 600 | UG      | 1Ø3W  | 65,000 Amps          | 3         | 3    | 58         | 36                             | 14 <sup>11</sup> / <sub>16</sub> | Single       |
| KCPLM-833PM    | 800  | 600 | UG      | 3Ø3W  | 65,000 Amps          | 3         | 3    | 58         | 36                             | 14 <sup>11</sup> / <sub>16</sub> | Single       |
| KCPLM-834PM    | 800  | 600 | UG      | 3Ø4W  | 65,000 Amps          | 3         | 3    | 58         | 36                             | 14 <sup>11</sup> / <sub>16</sub> | Single       |
| KCPLM-1233PM   | 1200 | 600 | UG      | 3Ø3W  | 85,000 Amps          | 4         | 4    | 64         | 45 <sup>3</sup> / <sub>4</sub> | 14 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-1234PM   | 1200 | 600 | UG      | 3Ø4W  | 85,000 Amps          | 4         | 4    | 64         | 45 <sup>3</sup> / <sub>4</sub> | 14 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-1633PM   | 1600 | 600 | UG      | 3Ø3W  | 85,000 Amps          | 5         | 5    | 66         | 54                             | 14 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-1634PM   | 1600 | 600 | UG      | 3Ø4W  | 85,000 Amps          | 5         | 5    | 66         | 54                             | 14 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-2033PM   | 2000 | 600 | UG      | 3Ø3W  | 85,000 Amps          | 6         | 6    | 66         | 54                             | 14 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-2034PM   | 2000 | 600 | UG      | 3Ø4W  | 85,000 Amps          | 6         | 6    | 66         | 54                             | 14 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-2533PM   | 2500 | 600 | UG      | 3Ø3W  | 85,000 Amps          | 7         | 7    | 72         | 50                             | 20 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-2534PM   | 2500 | 600 | UG      | 3Ø4W  | 85,000 Amps          | 7         | 7    | 72         | 50                             | 20 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-3033PM   | 3000 | 600 | UG      | 3Ø3W  | 85,000 Amps          | 8         | 8    | 72         | 50                             | 20 <sup>11</sup> / <sub>16</sub> | Double       |
| KCPLM-3034PM   | 3000 | 600 | UG      | 3Ø4W  | 85,000 Amps          | 8         | 8    | 72         | 50                             | 20 <sup>11</sup> / <sub>16</sub> | Double       |