





# MPRV and MPAP RV & Mobile Home Pedestals

## 100 Amps | Mobile Home Metered | 120/240 VAC

When ordered with receptacles from the factory in one of the configurations listed below, receptacles will be mounted on deadfront and wired from the factory. Example shown below.

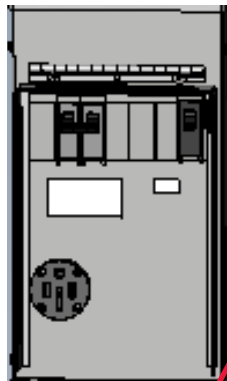

MRPV-50-78



MRPV-100-MB-78

### CATALOG NUMBER LOGIC FOR PEDESTALS

MP

No D: One power head  
D: Two power heads

MB: Series main breaker  
No MB: Parallel main breaker  
20GR: 5-20GR and 1P 20 Amps

RV: 100 Amps  
AP: 200 Amps

78: 78" tall direct bury pedestal  
PD: 54" tall pad-mount  
(requires MP-PDMNT-KIT pad-mount foot)

BLANK: No receptacles or breakers  
100: 100 Amps breaker  
200: 200 Amps breaker  
50: 14-50R receptacle & 2P 50 Amps circuit breaker  
(50-MB is 50 Amps circuit breaker only)  
503020GR: 1450, TT30 and 5-20GR w/ 50 Amps 2P, 30 Amps 1P, & 20 Amps 1P breakers

Pedestal Power Head Rating	Catalog Number	Mount	Description
100	MRPV-BLANK-78	DB	Ring type, no breaker
	MRPV-100-MB-78	DB	Ring type, series wired, 100 Amps breaker
	MRPV-100-MB-PD	PD	Ring type, series wired 100 Amps main breaker, pad-mount
	MRPV-100-20GR-78	DB	Ring type, parallel wired, 100 Amps with 20 Amps GFCI
	MRPV-50-78	DB	Ring type, 50 Amps breaker and receptacle
	MRPV-50-PD	PD	Ring type, 50 Amps breaker and receptacle, pad-mount
	MRPV-50-MB-78	DB	Ring type, parallel wired, 50 Amps breaker
	MRPV-503020GR-78	DB	Ring type, parallel wired 50/30/20 receptacle & breaker configuration
	MPRVD-BLANK -78*		Ring type, no breaker, double
	MPRVD-100-78*	DB	Ring type, parallel wired, 100 Amps breakers, double
	MPRVD-100-MB-78*	DB	Ring type, series wired, 100 Amps, main breakers, double
	MPRVD-100-MB-PD*	PD	Ring type, series wired 100 Amps main breakers, pad-mount, double
	MPRVD-503020GR-78*	DB	Ring type, 50 Amps, 30 Amps and 20 Amps receptacles with breakers, double

\*MPRVD units are back-to-back double power head pedestals.

DB stands for direct bury

PD stands for pad-mount


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.





# MPRV and MPAP RV & Mobile Home Pedestals

100 Amps | Mobile Home Metered | 120/240 VAC

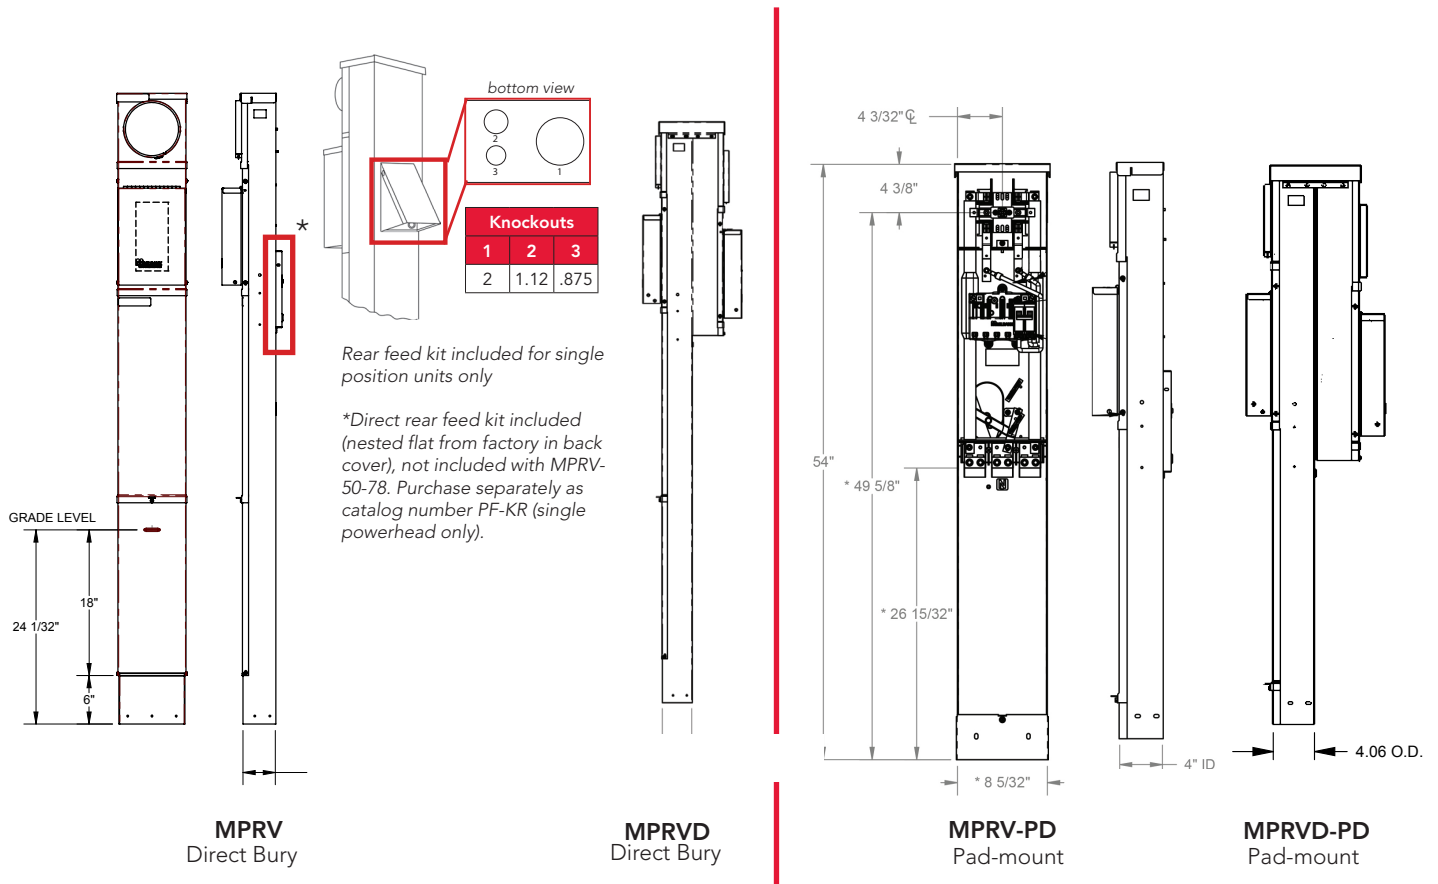

## Specifications

- UL listed 100 Amps **MPRV**
- Meets **EUSERC** drawing 307
- 120/240 VAC single-phase service
- Short circuit withstand rating: 10K AIC
- Line bus barrier made of rigid PVC conduit – factory installed
- Single or double power head available
- Direct bury and pad-mount available for single and double head pedestals
- NEMA 3R construction
- Twin line termination lugs #6-350 CU/AL per phase for loop feed wiring
- Furnished with space for six 1- or three 2-pole universal style, plug-in circuit breakers
- **MR-2** sealing ring standard with ring type cover
- Street light breaker kit available for **MPRV & MPAP** series, order catalog number **K6299**
- Pedestals painted with **ANSI 61 gray powder** coat finish standard. Other colors available, please contact factory.
- For pad-mount kit order **MP-PDMNT-KIT**
- For field-installable receptacles and breakers, please contact Milbank


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.





# MPRV and MPAP RV & Mobile Home Pedestals

200 Amps | Mobile Home Metered | 120/240 VAC

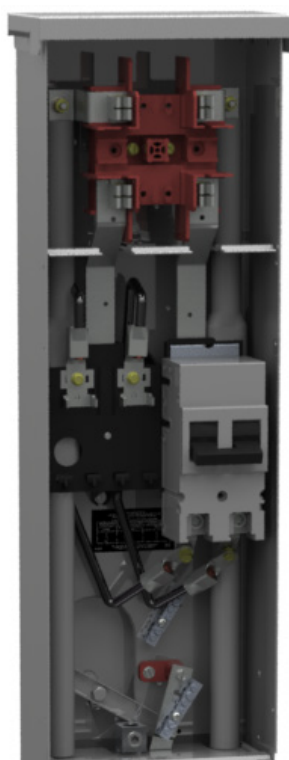

**MPAP-200-MB-78**



**MPAPD-BLANK-78**

Pedestal Power Head Rating	Catalog Number	Mount	Description
200	<b>MPAP-BLANK-78</b>	DB	Ring type, no breakers
	<b>MPAP-100-78</b>	DB	Ring type, parallel wired, 100 Amps breaker
	<b>MPAP-100-MB-78</b>	DB	Ring type, series wired, 100 Amps main breaker
	<b>MPAP-200-78</b>	DB	Ring type, parallel wired, 200 Amps breaker
	<b>MPAP-200-MB-78</b>	DB	Ring type, series wired, 200 Amps main breaker
	<b>MPAP-200-20GR-78</b>	DB	Ring type, parallel wired, 200 Amps with 20 Amps GFCI
	<b>MPAPD-BLANK-78*</b>	DB	Ring type, parallel wired, double, no breakers
	<b>MPAPD-100-MB-78*</b>	DB	Ring type, series wired 100 Amps main breakers, double

**\*MPAPD** units are back-to-back double power head pedestals.

DB stands for direct bury

PD stands for pad-mount


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.





# MPRV and MPAP RV & Mobile Home Pedestals

200 Amps | Mobile Home Metered | 120/240 VAC

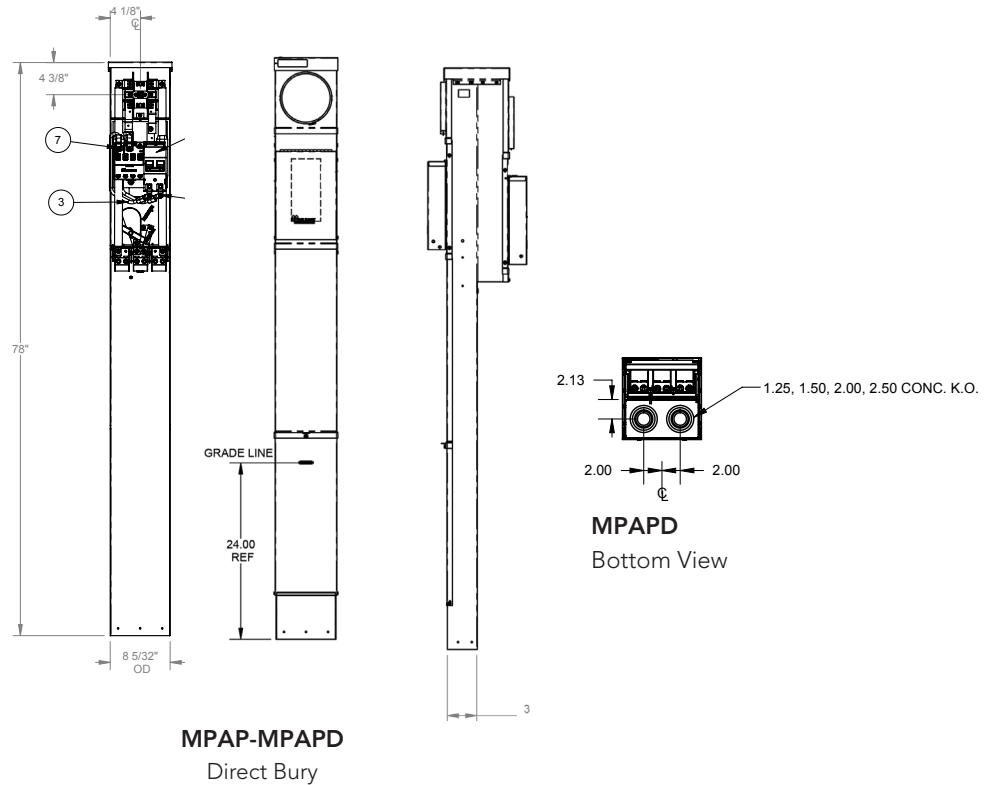

## Specifications

- UL listed 200 Amps **MPAP**
- Meets **EUSERC** drawing 307
- 120/240 VAC single-phase service
- Short circuit withstand rating: 10K AIC
- Line bus barrier made of rigid PVC conduit – factory installed
- Single or double power head available
- Direct bury and pad-mount available for single and double head pedestals
- NEMA 3R construction
- Twin line termination lugs #6-350 CU/AL per phase for loop feed wiring
- Furnished with space for four 1- or two 2-pole universal style, plug-in circuit breakers in addition to one 2-pole **UQFP** style Milbank main breaker
- Direct rear feed kit included (nested flat from factory in back cover). Purchase separately as catalog number PF-KR (for single powerhead only).
- **MR-2** sealing ring standard with ring type cover
- Street light breaker kit available for **MPAP**, order catalog number **K6299**
- For **MPAP** series wire kit, order **K5194**
- Pedestals painted with **ANSI 61 gray powder** coat finish standard. Other colors available, please contact factory.
- **MPAP-Blank-78** can accept (1) large frame (UQFP-M) breaker up to 200 Amps and has a 4 circuit load center that can accept up to either four 1-pole breakers or two 2-pole breakers.
- For field-installable receptacles and breakers, please contact Milbank

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

