




MILBANK
ENERGY AT WORK

U3413-O

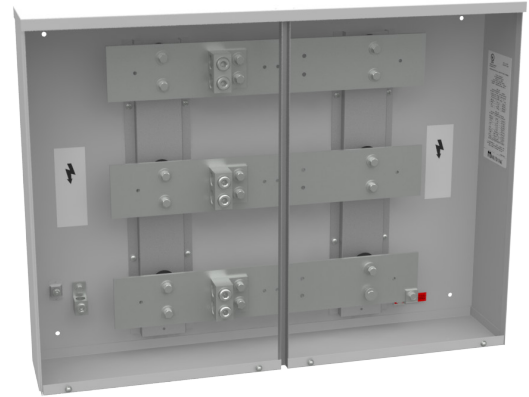

Catalog Number	U3413-O
Marketing Product Description	600 Ampere 1phase 600 Volt 36in-26.75in 6.5in Painted Steel Lift Off Screw Fronts 2 Lugs Per Landing - 4-600 Kcmil 50 Ampere Interrupting Capacity 3 Position
UPC	784572152618
Length (IN)	6.5
Width (IN)	36
Height (IN)	26.75
Weight (LB)	80
Brand Name	Milbank
Type	Line to Load Distribution
Application	Bus Gutter
Standard	UL Listed;Type 3R
Number Of Conductors	2
Conductor Material	Copper and Aluminum
Size	6.5L x 36W x 26.75H
Amperage Rating	Up to 600 Ampere
Voltage Rating	Up to 600 Volts Alternating Current
Temperature Rating	No Temperature Rating
Insulation Material	Polypropylene
Jacket Material	No Jacket Material

Color	ANSI 61 Gray
Connection	4 AWG to 600 kcmil Line Side Lugs and Load Side Tapped Holes
Construction	G90 Galvanized Steel
Finish	Powder Coat Finish
Number of Positions	3 Positions
Number of Phases	1
Short Circuit Rating	50000 Ampere
Miscellaneous	No Knockouts

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.