




**MILBANK**  
ENERGY AT WORK

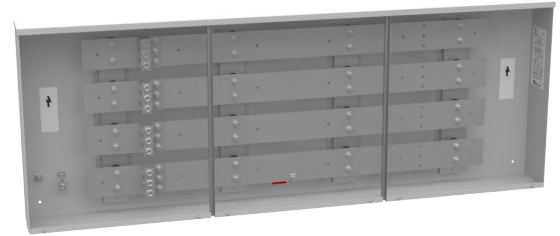

## U3466-O

Catalog Number	U3466-O	Connection	4 AWG to 600 kcmil Line Side Lugs and Load Side Tapped Holes
Marketing Product Description	800 Ampere 3 Phase 600 Volt 72in-26in-6in Painted Steel Lift Off Screw Fronts 3 Lugs Per Landing - 4-600kcmil 65k Ampere Interrupting Capacity	Construction	G90 Galvanized Steel
UPC	784572138087	Finish	Powder Coat Finish
Length (IN)	6.5	Number of Positions	6 Positions
Width (IN)	72	Number of Phases	3
Height (IN)	26.75	Short Circuit Rating	65000 Ampere
Weight (LB)	161	Miscellaneous	No Knockouts
Brand Name	Milbank		
Type	Line to Load Distribution		
Application	Bus Gutter		
Standard	UL Listed;Type 3R		
Number Of Conductors	3		
Conductor Material	Copper and Aluminum		
Size	6.5L x 72W x 26.75H		
Amperage Rating	Up to 800 Ampere		
Voltage Rating	Up to 600 Volts Alternating Current		
Temperature Rating	No Temperature Rating		
Insulation Material	Polypropylene		
Jacket Material	No Jacket Material		
Color	ANSI 61 Gray		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.