




MILBANK
ENERGY AT WORK

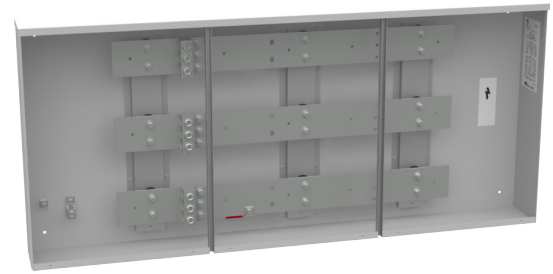

U3415-O

Catalog Number	U3415-O	Color	ANSI 61 Gray
Marketing Product Description	800 Ampere 1phase 600 Volt 60in-26.75in 6.5in Painted Steel Lift Off Screw Fronts 3 Lugs Per Landing - 4-600 Kcmil 65 Ampere Interrupting Capacity 5 Position	Connection	4 AWG to 600 kcmil Line Side Lugs and Load Side Tapped Holes
UPC	784572137875	Construction	G90 Galvanized Steel
Length (IN)	6.5	Finish	Powder Coat Finish
Width (IN)	60	Number of Positions	5 Positions
Height (IN)	26.75	Number of Phases	1
Weight (LB)	150	Short Circuit Rating	65000 Ampere
Brand Name	Milbank	Miscellaneous	No Knockouts
Type	Line to Load Distribution		
Application	Bus Gutter		
Standard	UL Listed;Type 3R		
Number Of Conductors	3		
Conductor Material	Copper and Aluminum		
Size	6.5L x 60W x 26.75H		
Amperage Rating	Up to 800 Ampere		
Voltage Rating	Up to 600 Volts Alternating Current		
Temperature Rating	No Temperature Rating		
Insulation Material	Polypropylene		
Jacket Material	No Jacket Material		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.