




MILBANK[®]
ENERGY AT WORK

U2752-X-5T9

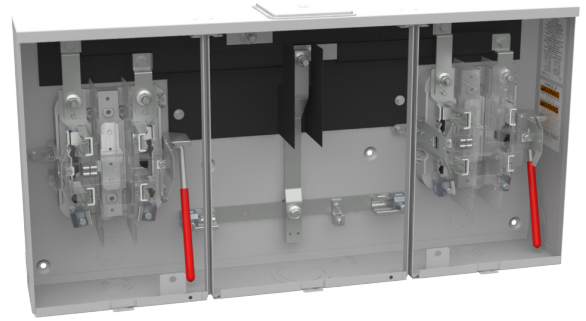

Catalog Number	U2752-X-5T9
Marketing Product Description	5 Terminal Ringless Large Closing Plate Lever Bypass 2 Position 5th Terminal 9 O'clock Position
UPC	784572135925
Length (IN)	4.875
Width (IN)	32.125
Height (IN)	16
Brand Name	Milbank
Type	Ringless Meter Socket
Application	Meter Socket
Standard	UL Listed; Type 3R
Voltage Rating	600 Volts Alternating Current
Amperage Rating	100 Continuous Ampere
Phase	1 Phase
Frequency Rating	60 Hertz
Size	4.875L x 32.125W x 16H
Number Of Cutouts	0
Cutout Size	No Main Breaker
Cable Entry	Overhead or Underground
Terminal	3/8 Inch Stud
Insulation	Glass Polyester
Mounting	Surface Mount

Enclosure	G90 Galvanized Steel with Powder Coat Finish
-----------	--

Jaw Quantity	5 Terminal
--------------	------------

Bypass Type	Lever Bypass
-------------	--------------

Number of Meter Positions	2 Positions
---------------------------	-------------

Equipment Ground	Ground Lug
------------------	------------

Hub Opening	Large Closing Plate
-------------	---------------------

Load Side Wire Range	6 - 2/0 AWG
----------------------	-------------

Number Of Receptacles	0
-----------------------	---

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.