

U1748-O




Catalog Number	U1748-O	
Marketing Product Description	4 Terminal Ringless Plain Top Lever Bypass Single Pedestal Direct Bury	
UPC	784572134201	
Length (IN)	4.844	
Width (IN)	13	
Height (IN)	64	
Brand Name	Milbank	
Туре	Ringless Meter Socket	
Application	Meter Socket	
Standard	UL Listed;Type 3R	
Voltage Rating	600 Volts Alternating Current	
Amperage Rating	320 Continuous Ampere	
Phase	1 Phase	
Frequency Rating	60 Hertz	
Size	4.844L x 13W x 64H	
Number Of Cutouts	0	
Cutout Size	No Main Breaker	
Cable Entry	Underground	
Terminal	3/8 Inch Stud	
Insulation	Glass Polyester	
Mounting	Pedestal	

Enclosure	G90 Galvanized Steel with Powder Coat Finish
Jaw Quantity	4 Terminal
Bypass Type	Lever Bypass
Number of Meter Positions	1 Position
Equipment Ground	4 Barrel Ground Lug
Hub Opening	Plain Top
Number Of Receptacles	0


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

	· •
	B B
64 1/16"	

13" O.D.

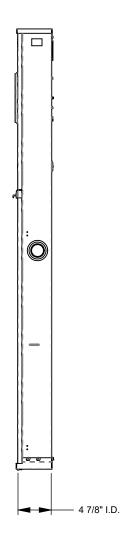

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
Α	2	5/16 SOLID K.O.
В	6	11/4, 11/2, 2, 21/2 CONC. K.O.







Version:

All dimensions are +/- 1/16". Drawing views are not to scale. Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.