

## M404-UG-LC-BS





Catalog Number	M404-UG-LC-BS
Marketing Product Description	4 Terminal Ring Type Plain Top Link Bypass 1-400 Ampere Main Breaker 30 Branch Circuits
UPC	784572255944
Length (IN)	6
Width (IN)	34.88
Height (IN)	47
Brand Name	Milbank
Type	Ring Type Meter Socket
Application	Meter Socket With Main And Load Center
Standard	UL Listed;Type 3R
Voltage Rating	Up to 240 Volts Alternating Current
Amperage Rating	320 Continuous Ampere
Phase	1 Phase
Frequency Rating	60 Hertz
Size	6L x 34.88W x 47H
Number Of Cutouts	1
Cutout Size	One 400 Ampere Main Breaker
Cable Entry	Underground
Terminal	Single Mechanical

Insulation	Glass Polyester
Mounting	Surface Mount
Enclosure	G90 Galvanized Steel with Powder Coat Finish
Jaw Quantity	4 Terminal
Bypass Type	Link Bypass
Number of Meter Positions	1 Position
Equipment Ground	Ground Bar
Hub Opening	Plain Top
Line Side Wire Range	6 AWG - 350 kcmil
Number Branch Circuits	30
Number Of Receptacles	0

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	4	TRANS. MNTG.EMBOSS
B	12	½ SOLID K.O.
C	4	½, ¾ CONC. K.O.
D	2	½, ¾, 1, 1¼ CONC. K.O.
E	2	¾, 1 CONC. K.O.
F	3	¾, 1, 1¼, 1½ CONC. K.O.
G	4	1, 1¼, 1½, 2 CONC. K.O.
H	1	3, 3½, 4 CONC. K.O.

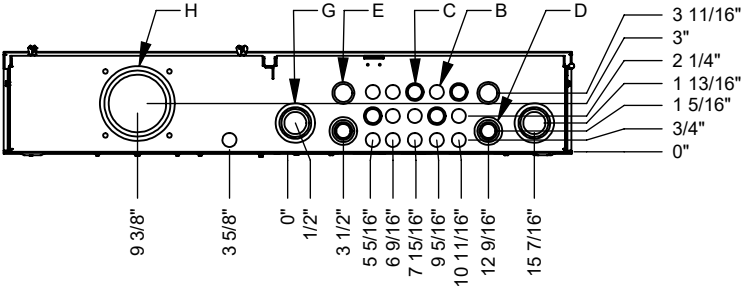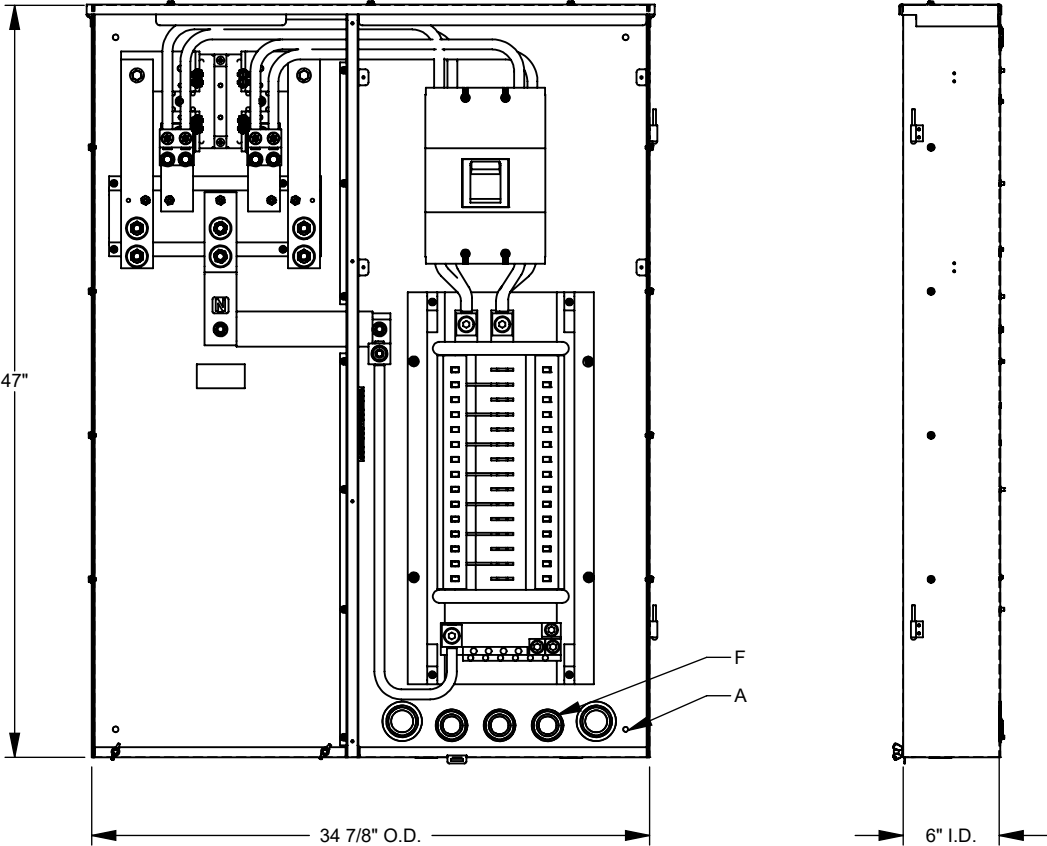

Version:

1

**All dimensions are +/- 1/16".  
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.