




MILBANK
ENERGY AT WORK

MS-27-TB

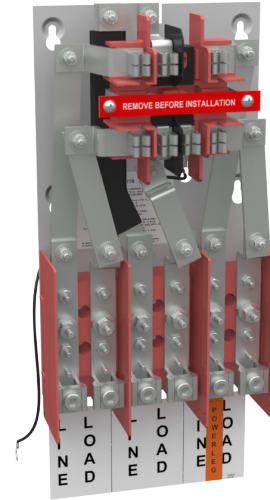

Catalog Number	MS-27-TB	Jaw Quantity	7 Terminal
Marketing Product Description	200 Ampere 7 Terminal Test Block	Bypass Type	Link Bypass
UPC	784572117785	Number of Meter Positions	1 Position
Length (IN)	4.531	Equipment Ground	No Equipment Ground
Width (IN)	9	Hub Opening	No Hub Opening
Height (IN)	20.344	Line Side Wire Range	1/0 - 250 kcmil
Brand Name	Milbank	Load Side Wire Range	1/0 - 250 kcmil
Type	Ring Type Meter Socket	Number Of Receptacles	0
Application	Meter Socket		
Standard	UL Listed;Type 3R		
Voltage Rating	Up to 240 Volts Alternating Current		
Amperage Rating	200 Continuous Ampere		
Phase	3 Phase		
Frequency Rating	60 Hertz		
Size	4.531L x 9W x 20.344H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Block and Bridge Only		
Terminal	Single Mechanical		
Insulation	Fiberglass with Resin		
Mounting	Panel Mount		
Enclosure	Block and Bridge Only		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.