





**MILBANK**  
ENERGY AT WORK

## U5200-XL-332




Catalog Number	U5200-XL-332	Cable Entry	Underground
Marketing Product Description	Unmetered Small Closing Plate 520GR TT30 TT30 Single Pedestal Direct Bury Pedestal	Terminal	Double Mechanical
UPC	784572265103	Insulation	Glass Polyester
Length (IN)	5.188	Mounting	Pedestal
Width (IN)	8.688	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Height (IN)	64.5	Jaw Quantity	0 Terminals
Brand Name	Milbank	Bypass Type	No Bypass
Type	Unmetered Power Supply	Number of Meter Positions	Single Power Head
Special Features	Two Single Pole 30 Ampere Breakers and Single Pole 20 Ampere Breaker	Equipment Ground	2 Barrel Ground Lug and Ground Bar
Application	RV Power	Hub Opening	Small Closing Plate
Standard	UL Listed;Type 3R	Line Side Wire Range	6 AWG - 350 kcmil
Voltage Rating	Up to 240 Volts Alternating Current	Number Branch Circuits	3
Amperage Rating	125 Continuous Ampere	Number Of Receptacles	3
Phase	1 Phase	Receptacle Configuration	Two NEMA TT30 and One NEMA 5-20 Ground Fault
Frequency Rating	60 Hertz		
Size	5.188L x 8.688W x 64.5H		
Number Of Cutouts	3		
Cutout Size	Two Single Pole 30 Ampere Breakers and One Single Pole 20 Ampere Breaker		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

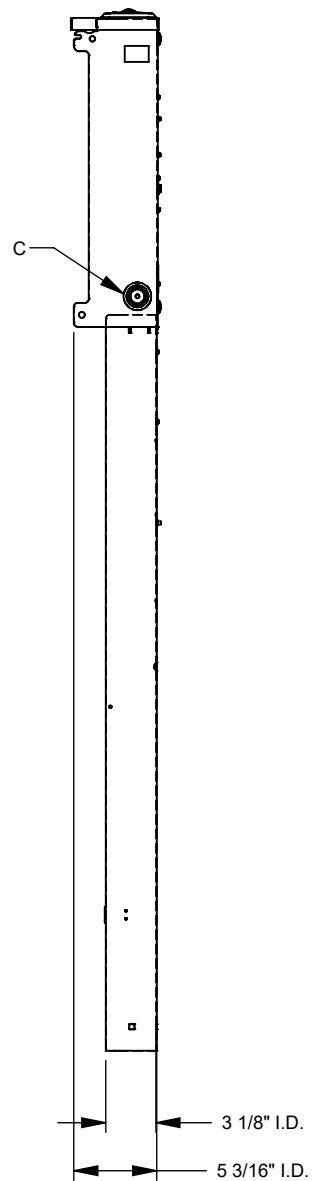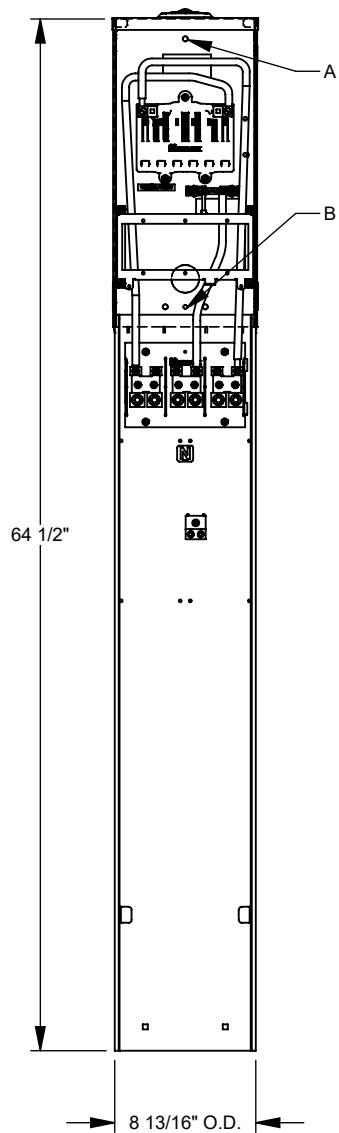

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	3	U/L MNTG.EMBOSS
B	1	1/4 SOLID K.O.
C	2	1/4, 1/2, 3/4, 1, 1 1/4 CONC. K.O.

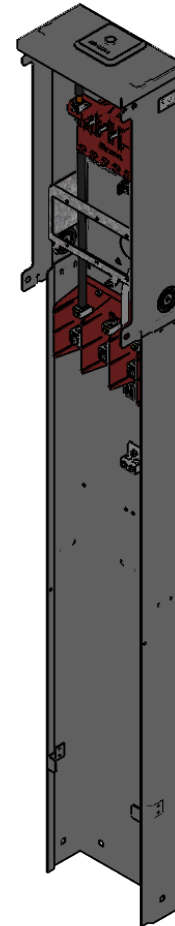

**MILBANK**  
ENERGY AT WORK

Version:

**1**

**All dimensions are +/- 1/16".  
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.