


## U5136-O-150S





Catalog Number	U5136-O-150S
Marketing Product Description	4 Terminal Ringless Plain Top Horn Bypass 1-150 Ampere Main Breaker Single Pedestal Direct Bury Series Wired
UPC	784572287686
Length (IN)	10.25
Width (IN)	9.813
Height (IN)	80
Brand Name	Milbank
Туре	Ringless Meter Socket
Application	Mobile Home Power
Standard	UL Listed;Type 3R
Voltage Rating	Up to 240 Volts Alternating Current
Amperage Rating	200 Continuous Ampere
Phase	1 Phase
Frequency Rating	60 Hertz
Size	10.25L x 9.813W x 80H
Number Of Cutouts	1
Cutout Size	One 150 Ampere Main Breaker
Cable Entry	Underground
Terminal	Double Mechanical
Insulation	Glass Polyester

Pedestal
G90 Galvanized Steel with Powder Coat Finish
4 Terminal
Horn Bypass
Single Power Head
Ground Bar
Plain Top
6 AWG - 350 kcmil
1/0 AWG - 300 kcmil
4
0


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

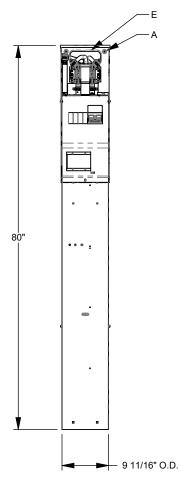



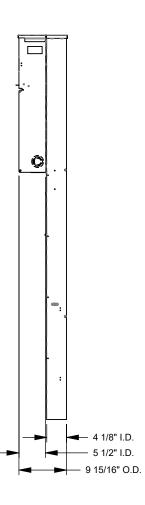

FEATURE TABLE			FEATURE TABLE
	ITEM	QTY	DESCRIPTION
	Α	4	STD. MNTG. EMBOSS
	В	2	1/4 SOLID K.O.
	С	2	½, ¾ CONC. K.O.
	D	3	1, 1¼, 1½, 2 CONC. K.O.
	F	1	WESTERN LIGHT OPENING





## All dimensions are +/- 1/16". Drawing views are not to scale.

Version:

1

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.