




MILBANK
ENERGY AT WORK

U1770-YL-TG-KK-BLG

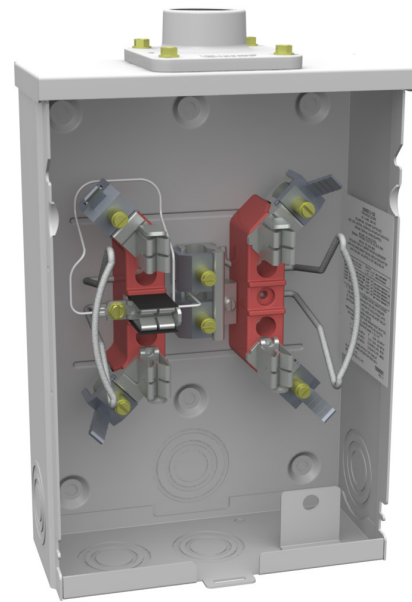

| | |
|-------------------------------|---|
| Catalog Number | U1770-YL-TG-KK-BLG |
| Marketing Product Description | 5 Terminal Ringless 1.25 In Hub Triplex Ground Horn Bypass 7-8 In Barrel Lock Ground With Bracket Provision |
| UPC | 784572311121 |
| Length (IN) | 3.313 |
| Width (IN) | 8 |
| Height (IN) | 11.5 |
| Brand Name | Milbank |
| Type | Ringless Meter Socket |
| Application | Meter Socket |
| Standard | UL Listed;Type 3R |
| Voltage Rating | 600 Volts Alternating Current |
| Amperage Rating | 125 Continuous Ampere |
| Phase | 1 Phase |
| Frequency Rating | 60 Hertz |
| Size | 3.313L x 8W x 11.5H |
| Number Of Cutouts | 0 |
| Cutout Size | No Main Breaker |
| Cable Entry | Overhead or Underground |
| Terminal | Lay in |
| Insulation | Glass Polyester |

| | |
|---------------------------|---|
| Mounting | Surface Mount |
| Enclosure | G90 Galvanized Steel with Powder Coat Finish |
| Jaw Quantity | 5 Terminal |
| Bypass Type | Horn Bypass |
| Number of Meter Positions | 1 Position |
| Equipment Ground | Triplex Ground |
| Hub Opening | 1 1/4 Inch Hub |
| Line Side Wire Range | 6 - 2/0 AWG |
| Load Side Wire Range | 6 - 2/0 AWG |
| Barrel Lock Provision | 7/8 Inch Knockout and Angle Bracket For Barrel Lock Provision |
| Number Of Receptacles | 0 |

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.