



**MILBANK**  
ENERGY AT WORK

## MPRVD-503020GR-78






|                               |                                                                                                   |
|-------------------------------|---------------------------------------------------------------------------------------------------|
| Catalog Number                | MPRVD-503020GR-78                                                                                 |
| Marketing Product Description | 4 Terminal Ring Type Plain Top 1450 TT30 520GR Double Pedestal Direct Bury MH-RV                  |
| UPC                           | 784572177840                                                                                      |
| Length (IN)                   | 13.603                                                                                            |
| Width (IN)                    | 8.16                                                                                              |
| Height (IN)                   | 78                                                                                                |
| Brand Name                    | Milbank                                                                                           |
| Type                          | Ring Type Meter Socket                                                                            |
| Special Features              | Single Pole 20 Ampere Breaker and Single Pole 30 Ampere Breaker and Double Pole 50 Ampere Breaker |
| Application                   | Mobile Home Power                                                                                 |
| Standard                      | UL Listed;Type 3R                                                                                 |
| Voltage Rating                | Up to 240 Volts Alternating Current                                                               |
| Amperage Rating               | 100 Continuous Ampere                                                                             |
| Phase                         | 1 Phase                                                                                           |
| Frequency Rating              | 60 Hertz                                                                                          |
| Size                          | 13.603L x 8.16W x 78H                                                                             |
| Number Of Cutouts             | 0                                                                                                 |
| Cutout Size                   | No Main Breaker                                                                                   |
| Cable Entry                   | Underground                                                                                       |

|                           |                                              |
|---------------------------|----------------------------------------------|
| Terminal                  | Double Mechanical                            |
| Insulation                | Fiberglass with Resin                        |
| Mounting                  | Pedestal                                     |
| Enclosure                 | G90 Galvanized Steel with Powder Coat Finish |
| Jaw Quantity              | 4 Terminal                                   |
| Bypass Type               | No Bypass                                    |
| Number of Meter Positions | 2 Positions                                  |
| Equipment Ground          | Ground Bar                                   |
| Hub Opening               | Plain Top                                    |
| Line Side Wire Range      | 6 AWG - 350 kcmil                            |
| Load Side Wire Range      | 4 - 1/0 AWG                                  |
| Number Branch Circuits    | 12                                           |
| Number Of Receptacles     | 0                                            |

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

| FEATURE TABLE |     |                          |
|---------------|-----|--------------------------|
| ITEM          | QTY | DESCRIPTION              |
| A             | 2   | 1¼, 1½, 2, 2½ CONC. K.O. |

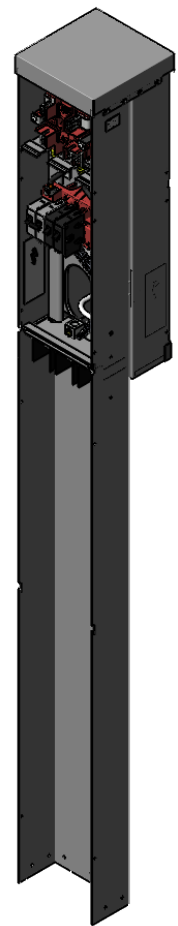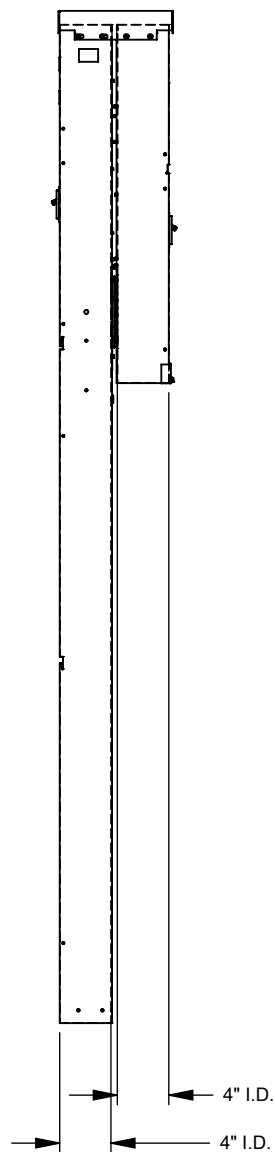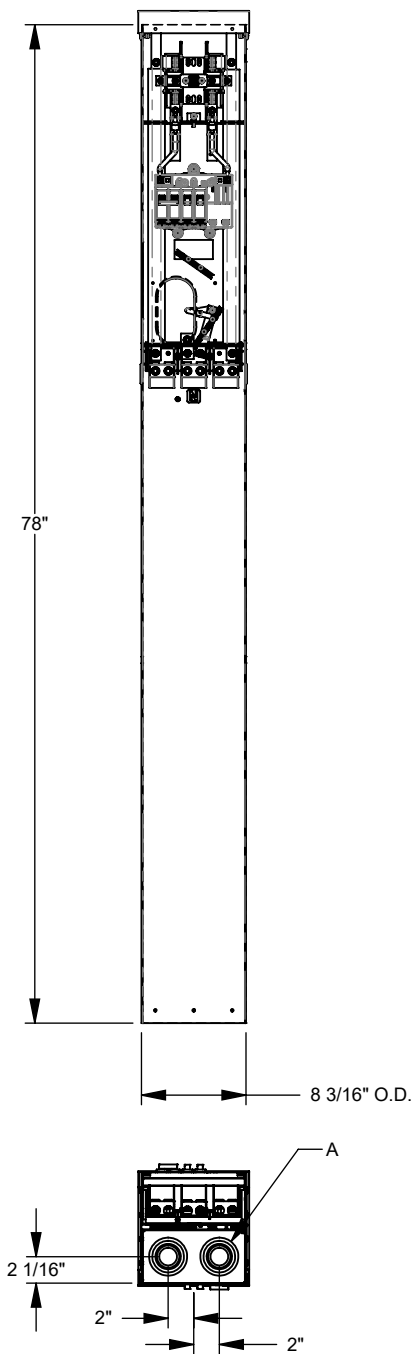

Version:

1

**All dimensions are +/- 1/16".  
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.