

## U5220-XL-111GR






Catalog Number	U5220-XL-111GR	Insulation	Glass Polyester
Marketing Product Description	Unmetered Small Closing Plate 520GR 520GR 520GR Double Pedestal Direct Bury	Mounting	Pedestal
UPC	784572464780	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Length (IN)	11.25	Jaw Quantity	0 Terminals
Width (IN)	8.656	Bypass Type	No Bypass
Height (IN)	64.5	Number of Meter Positions	Double Power Head
Brand Name	Milbank	Equipment Ground	2 Barrel Ground Lug and Ground Bar
Type	Unmetered Power Supply	Hub Opening	Small Closing Plate
Special Features	Three Single Pole 20 Ampere Breakers	Line Side Wire Range	6 AWG - 350 kcmil
Application	RV Power	Number Branch Circuits	6
Standard	UL Listed; Type 3R	Number Of Receptacles	6
Voltage Rating	Up to 240 Volts Alternating Current	Receptacle Configuration	Six NEMA 5-20 Ground Fault
Amperage Rating	125 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	11.25L x 8.656W x 64.5H		
Number Of Cutouts	6		
Cutout Size	Six Single Pole 20 Ampere Breakers		
Cable Entry	Underground		
Terminal	Double Mechanical		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

**FEATURE TABLE**

ITEM	QTY	DESCRIPTION
A	6	U/L MNTG.EMBOSS
B	2	1/4 SOLID K.O.
C	4	1/2, 3/4, 1, 1 1/4 CONC. K.O.
D	2	1/2, 3/4, 1, 1 1/4, 1 1/2 CONC. K.O.
E	1	3/4, 1, 1 1/4, 1 1/2, 2 CONC. K.O.

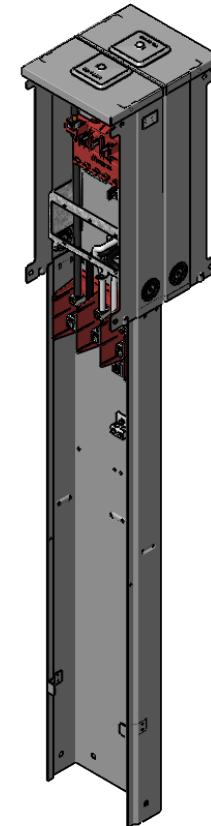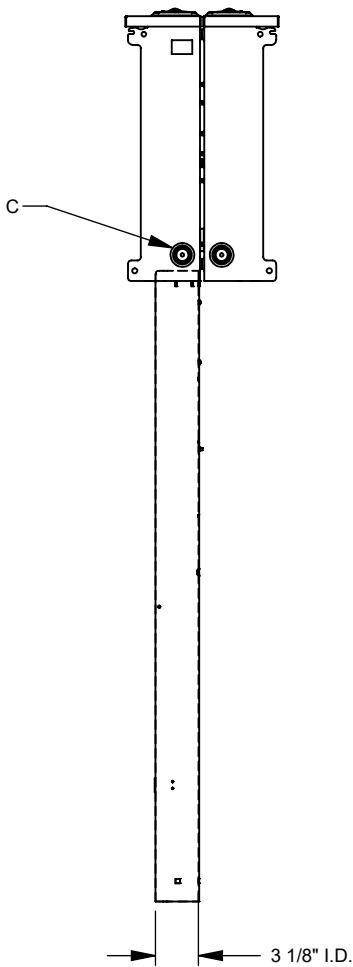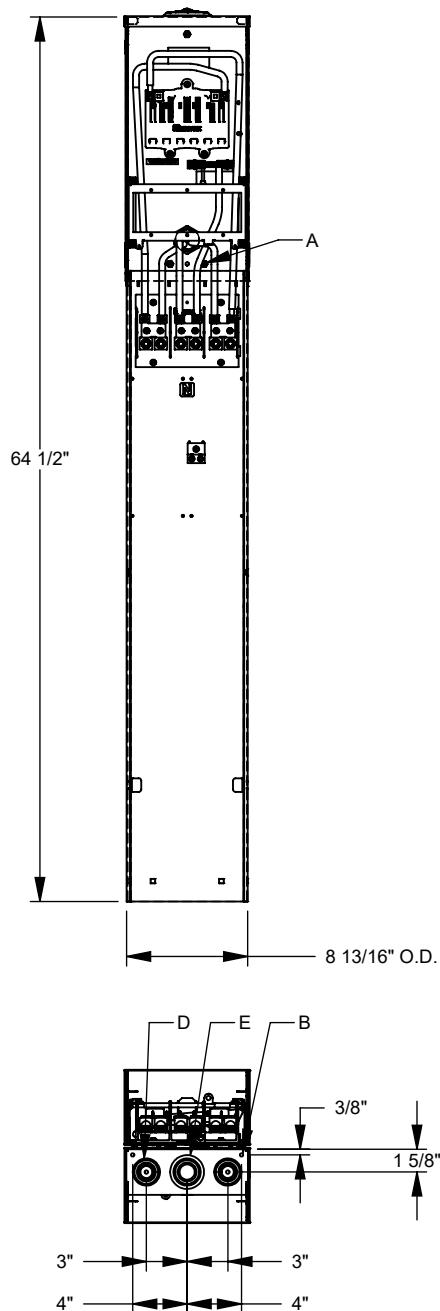

All dimensions are +/- 1/16".  
Drawing views are not to scale.

Version:

**1**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.