


U3358-O-KK-ALT




Catalog Number	U3358-O-KK-ALT	
Marketing Product Description	4 Terminal Ringless Plain Top Horn Bypass Single Pedestal Direct Bury Alliant Energy	
UPC	784572496378	
Length (IN)	4.125	
Width (IN)	9	
Height (IN)	62	
Brand Name	Milbank	
Туре	Ringless Meter Socket	
Application	Meter Socket	
Standard	UL Listed;Type 3R	
Voltage Rating	Up to 240 Volts Alternating Current	
Amperage Rating	200 Continuous Ampere	
Phase	1 Phase	
Frequency Rating	60 Hertz	
Size	4.125L x 9W x 62H	
Number Of Cutouts	0	
Cutout Size	No Main Breaker	
Cable Entry	Underground	
Terminal	Single Mechanical	
Insulation	Glass Polyester	
Mounting	Pedestal	

Enclosure	G90 Galvanized Steel with Powder Coat Finish
Jaw Quantity	4 Terminal
Bypass Type	Horn Bypass
Number of Meter Positions	1 Position
Equipment Ground	2 Barrel Ground Lug
Hub Opening	Plain Top
Line Side Wire Range	6 AWG - 350 kcmil
Load Side Wire Range	6 AWG - 350 kcmil
Number Of Receptacles	0

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

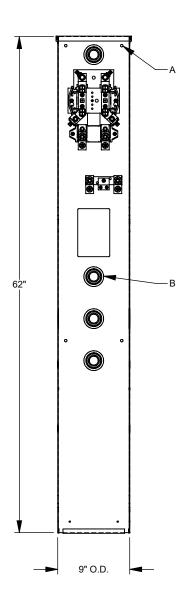

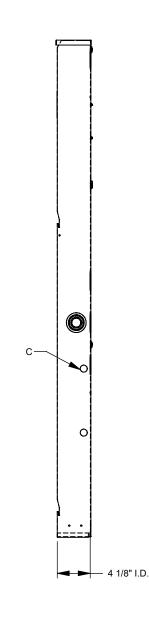

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
Α	4	STD. MNTG. EMBOSS, NO HOLE
В	4	⅓ SOLID K.O.
С	6	34. 1. 114. 115. 2 CONC. K.O.





All dimensions are +/- 1/16". Drawing views are not to scale.

Version:

1

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.