

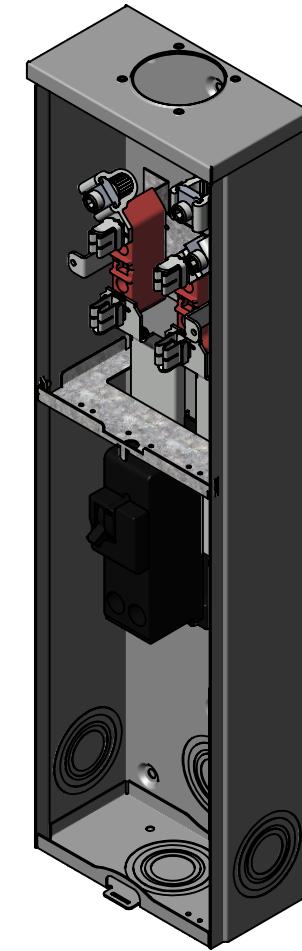


U5852-RL

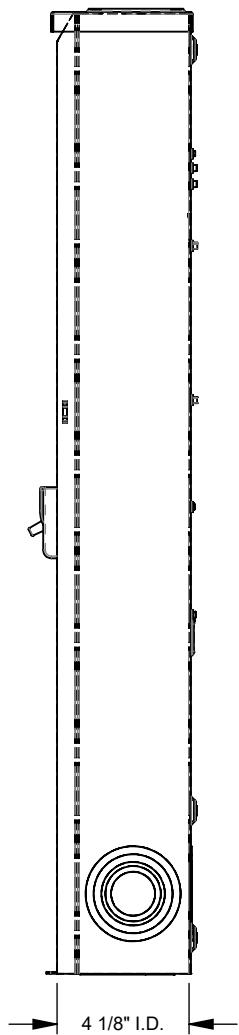

Catalog Number	U5852-RL	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Marketing Product Description	4 Terminal Ring Type Small Hub Open 1-main Breaker Provision	Jaw Quantity	4 Terminal
UPC	784572512603	Bypass Type	No Bypass
Length (IN)	4.125	Number of Meter Positions	1 Position
Width (IN)	8	Equipment Ground	2 Barrel Ground Lug
Height (IN)	30	Hub Opening	Small Hub Opening
Brand Name	Milbank	Line Side Wire Range	6 AWG - 350 kcmil
Type	Ring Type Meter Socket	Number Branch Circuits	1
Application	Meter Socket With Main	Number Of Receptacles	0
Standard	UL Listed; Type 3R		
Voltage Rating	Up to 240 Volts Alternating Current		
Amperage Rating	200 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.125L x 8W x 30H		
Number Of Cutouts	0		
Cutout Size	Breaker Provision		
Cable Entry	Overhead		
Terminal	Lay in		
Insulation	Glass Polyester		
Mounting	Surface Mount		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

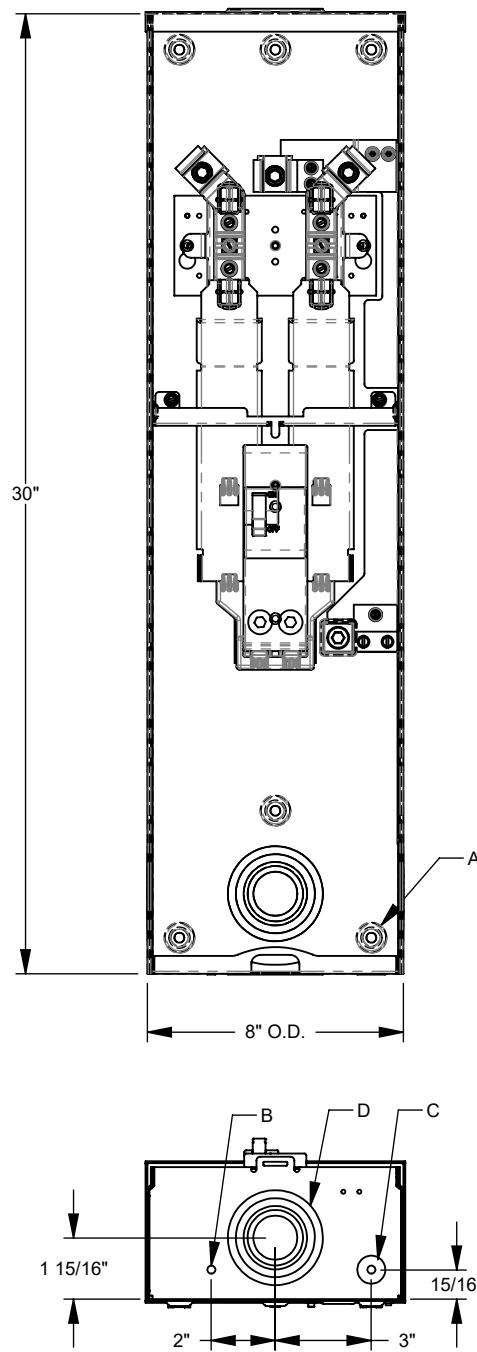

FEATURE TABLE

ITEM	QTY	DESCRIPTION
A	6	U/L MNTG.EMBOSS
B	1	1/4 SOLID K.O.
C	1	1/4, 1/2 CONC. K.O.
D	4	1, 1 1/4, 1 1/2, 2, 2 1/2 CONC. K.O.



All dimensions are +/- 1/16".
Drawing views are not to scale.

Version:

1

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.