

USS4801-O







Catalog Number	USS4801-O	Jaw Quantity	4 Terminal
Marketing Product Description	4 Terminal Ringless Plain Top Lever Bypass Stainless Steel	Bypass Type	Lever Bypass
UPC	784572527669	Number of Meter Positions	1 Position
Length (IN)	4.844	Equipment Ground	Bonded Ground Strap
Width (IN)	13	Hub Opening	Plain Top
Height (IN)	19	Line Side Wire Range	6 AWG - 350 kcmil
Brand Name	Milbank	Load Side Wire Range	6 AWG - 350 kcmil
Type	Ringless Meter Socket	Number Of Receptacles	0
Application	Meter Socket		
Standard	UL Listed; Type 3R		
Voltage Rating	600 Volts Alternating Current		
Amperage Rating	200 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.844L x 13W x 19H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Overhead or Underground		
Terminal	Lay in		
Insulation	Glass Polyester		
Mounting	Surface Mount		
Enclosure	Unpainted 304 Stainless Steel		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE

ITEM	QTY	DESCRIPTION
A	4	STD. MNTG. EMBOS

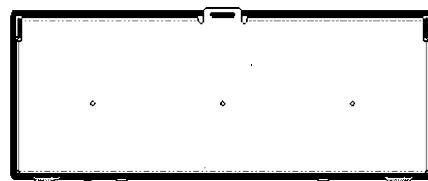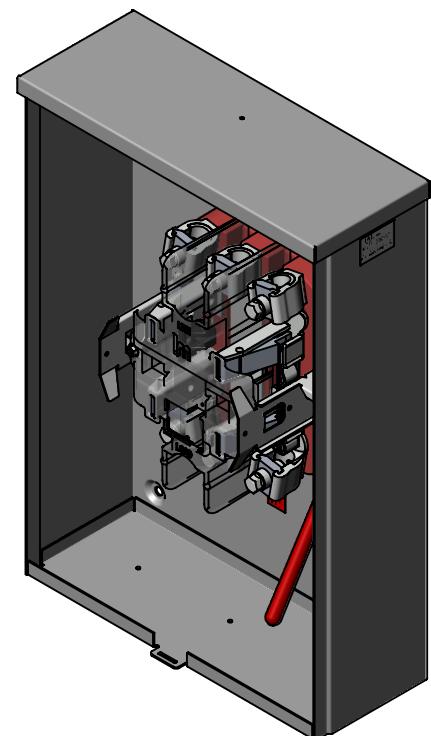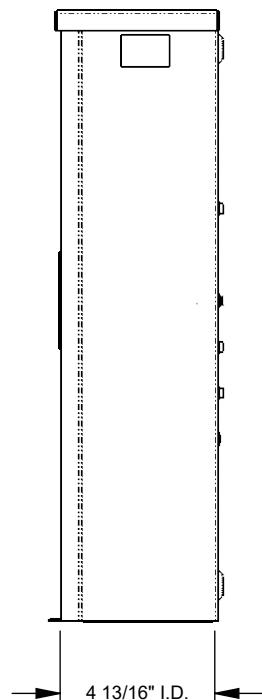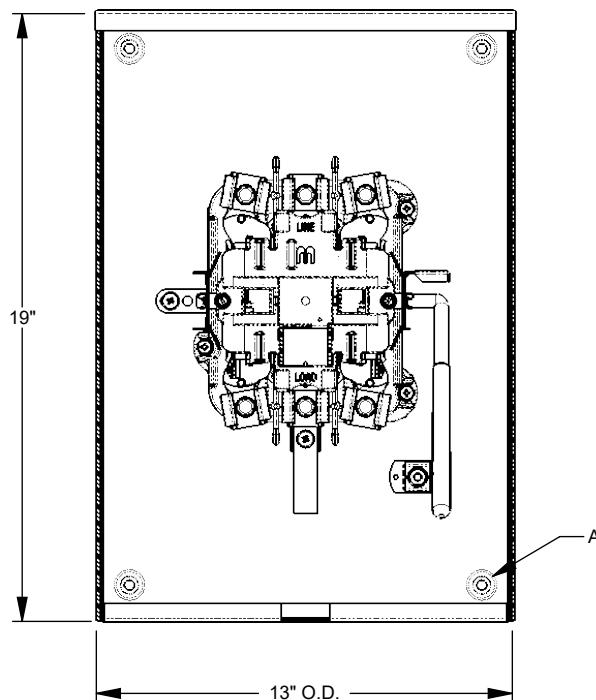

All dimensions are +/- 1/16".
Drawing views are not to scale.

Version:

1

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.