




MILBANK[®]
ENERGY AT WORK

U5898-O-200-KK-BLG

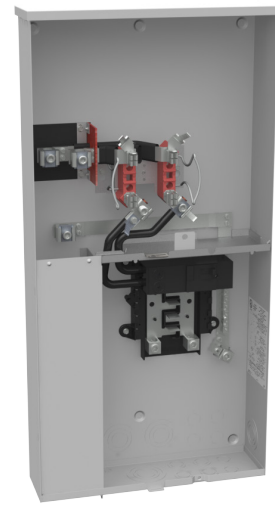

Catalog Number	U5898-O-200-KK-BLG	Terminal	Lay in
Marketing Product Description	4 Terminal Ringless Plain Top 1-200 Ampere Main Breaker 8 Circuit Horn Bypass 7-8 In Barrel Lock With Bracket Provision Side Wireway	Insulation	Glass Polyester
UPC	784572602861	Mounting	Surface Mount
Length (IN)	4.5	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Width (IN)	17	Jaw Quantity	4 Terminal
Height (IN)	34.5	Bypass Type	Horn Bypass
Brand Name	Milbank	Number of Meter Positions	1 Position
Type	Ringless Meter Socket	Equipment Ground	Ground Bar
Application	Meter Socket With Main And Load Center	Hub Opening	Plain Top
Standard	UL Listed;Type 3R	Line Side Wire Range	6 AWG - 350 kcmil
Voltage Rating	Up to 240 Volts Alternating Current	Load Side Wire Range	6 AWG - 350 kcmil
Amperage Rating	200 Continuous Ampere	Barrel Lock Provision	7/8 Inch Knockout and Angle Bracket For Barrel Lock Provision
Phase	1 Phase	Number Branch Circuits	8
Frequency Rating	60 Hertz	Number Of Receptacles	0
Size	4.5L x 17W x 34.5H		
Number Of Cutouts	1		
Cutout Size	One 200 Ampere Main Breaker		
Cable Entry	Underground with Side Wireway		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.