




U4810-XT-21-BLG




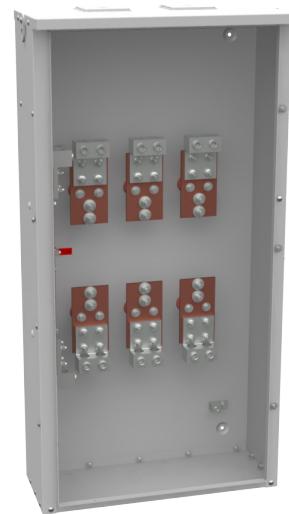


Catalog Number	U4810-XT-21-BLG	Insulation	Glass Polyester
Marketing Product Description	13 Terminal Ringless 2 Large Closing Plates Test Switch Prewired 400-800 Ampere Painted Steel Single Front Piano Hinge Cover Hasp Current Transformer Mounting Included 120-208 Volt	Mounting	Surface Mount
UPC	784572603318	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Length (IN)	10	Jaw Quantity	13 Terminal
Width (IN)	26	Bypass Type	No Bypass
Height (IN)	51	Number of Meter Positions	1 Position
Brand Name	Milbank	Equipment Ground	Ground Lug
Type	Ringless Meter Socket	Hub Opening	Twin Large Closing Plates
Application	Meter Socket	Line Side Wire Range	14 - 4 AWG
Standard	UL Listed; Type 3R	Load Side Wire Range	14 - 4 AWG
Voltage Rating	600 Volts Alternating Current	Barrel Lock Provision	7/8 Inch Knockout and Angle Bracket For Barrel Lock Provision
Amperage Rating	20 Continuous Ampere	Number Of Receptacles	0
Phase	3 Phase		
Frequency Rating	60 Hertz		
Size	10L x 26W x 51H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Overhead or Underground		
Terminal	Double Mechanical		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE

ITEM	QTY	DESCRIPTION
A	4	TRANS. MNTG.EMBOSS
B	1	1/2, 3/4, 1, 1 1/4 CONC. K.O.
C	4	2, 2 1/2, 3, 3 1/2, 4 CONC. K.O.

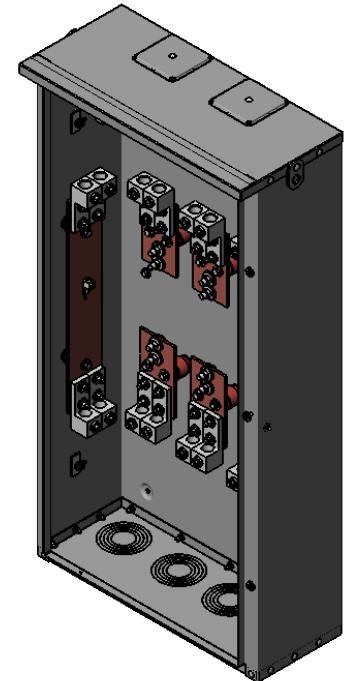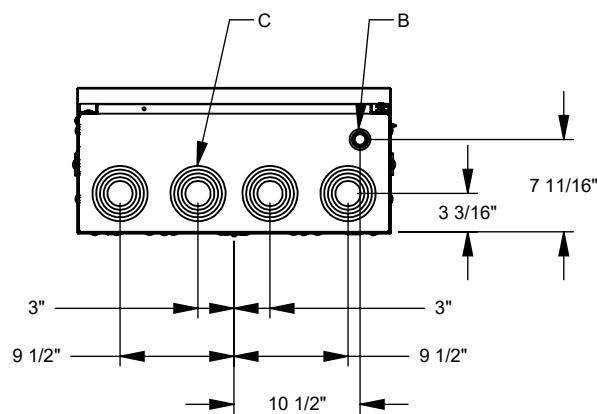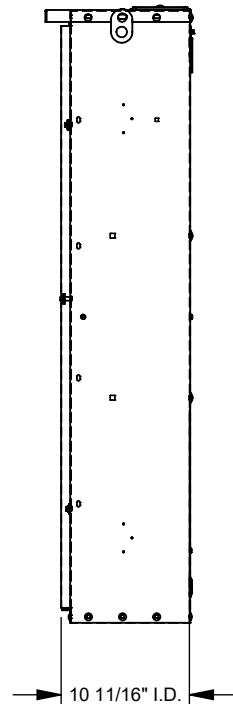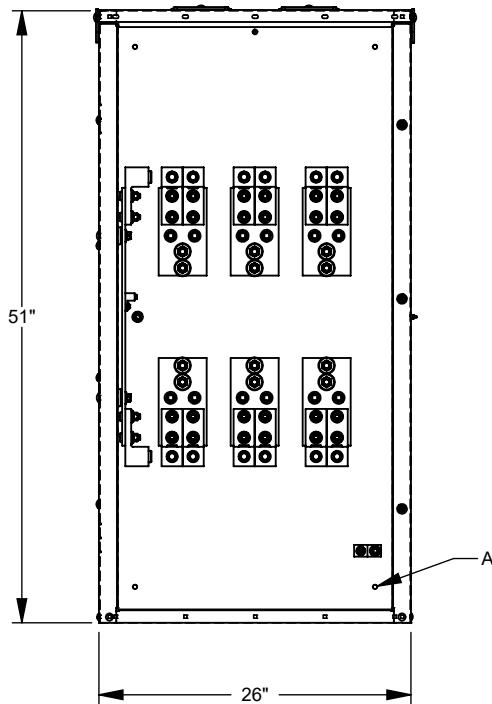

All dimensions are +/- 1/16".
Drawing views are not to scale.

Version:

1

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.