



Cold Sequence Meter Main Pedestal

60-200 Amp | 240 Volt | 4 Terminal | Lever Bypass | Ringless

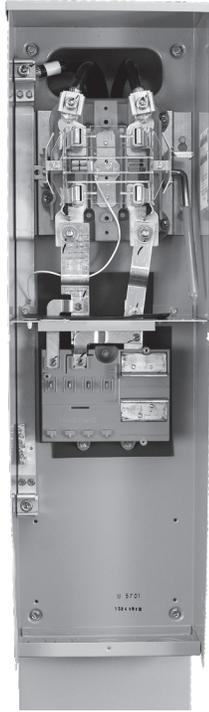

U5949-O-5T9

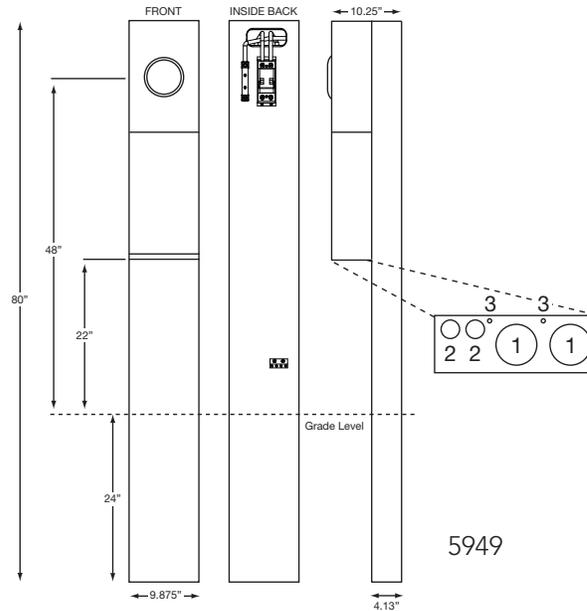

5949

Overview

The U5949 Cold Sequence meter main provides the utility a UL listed system which includes a heavy-duty lever bypass meter socket and load center with a fused disconnect ahead of the meter. Being able to turn off the power ahead of the meter allows the utility to install, maintain or replace the meter while "cold."

60-200 Amp | 4 Terminal | Meter Main Pedestal | Lever Bypass | Ringless

Catalog Number	Service	Amps	By-pass	Connectors CU/AL		Knockouts		
				Line	Load	1	2	3
U5949-O-60PO-5T9	UG	60	Lever	#6-350	CB	2	1/2, 3/4	1/4
U5949-O-100PO-5T9	UG	100	Lever	#6-350	CB	2	1/2, 3/4	1/4
U5949-O-200PO-5T9	UG	200	Lever	#6-350	CB	2	1/2, 3/4	1/4

Notes

- **Parallel to Series Conversion:** When ordered without breaker, center is parallel wired. For field converting from parallel wired to series wired order **K5194**.
- **Fifth Terminal:** For field installed fifth terminal, order **K3865**.
- **Stabilizer Foot:** For field installed stabilizer foot, order **K5415**
- **Receptacles:** Consult factory for installed receptacle assemblies.
- **Breakers:** the main breaker to be used are the **UQFP** and **UQFPM** series breakers.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

