



CenterPoint Approved Multi-Position Tap Box

Wall- or Pad-mountable



S6532-O-TX



K6526-12

Tap Box Features

- Lift-off front cover, padlockable
- Easy installation
- Wall-mount or pad-mount installation
- NEMA 3R rated G90 galvanized steel enclosure
- Multi-port ground lugs included
- Ideal for housing developments, strip malls & apartment buildings
- Removable gutter plate on right or left side

Gutter Features

- 16-gauge G90 galvanized steel
- Hanging/slotted brackets for wall mounting
- Lift-off covers for easy sectional entry
- Stainless steel handles on lift-off cover
- Removable gasketed end caps
 - One end cap included


Tap Boxes

Catalog Number	Maximum Amperage	Phase	Position Lugs	Bus Material	Bus Quantity	Dimensions		
						D"	W"	H"
S6532-O-TX	800	3	13	Aluminum	4	14	32 ²¹ / ₃₂	40
S6347-O-TX	1200	3	13	Aluminum	8	14	32 ²¹ / ₃₂	40
S6348-O-TX	2000	3	13	Aluminum	12	14	32 ²¹ / ₃₂	40
S6349-O-TX	3000	3	13	Aluminum	16	14	32 ²¹ / ₃₂	40
S6350-O-TX	4000	3	13	Copper	16	14	32 ²¹ / ₃₂	40

Wireways

Catalog Number	Dimensions		
	D"	W"	H"
K6526-12	12	30	13 ²³ / ₃₂
K6527-12	12	60	13 ²³ / ₃₂
K6528-12	12	120	13 ²³ / ₃₂
K6529-14	14	30	15 ²³ / ₃₂
K6530-14	14	60	15 ²³ / ₃₂
K6531-14	14	120	15 ²³ / ₃₂

Common Applications

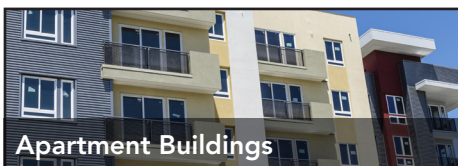



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.






CenterPoint Approved Multi-Position Tap Box


Wall- or Pad-mountable

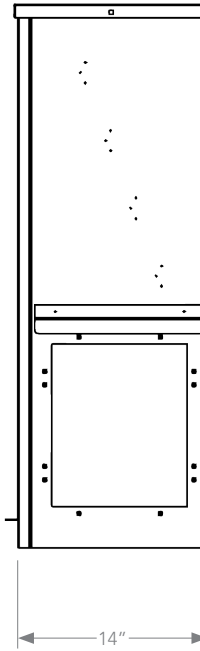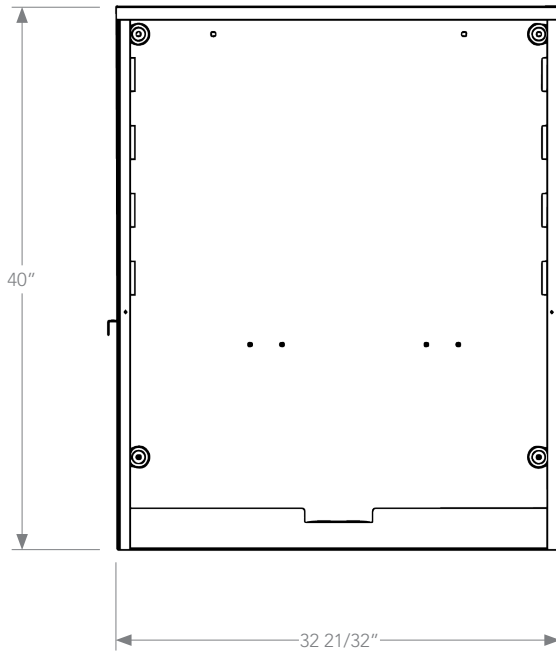

S6532-O-TX

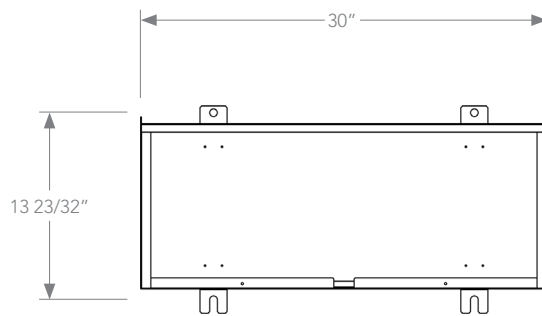

K6526-12

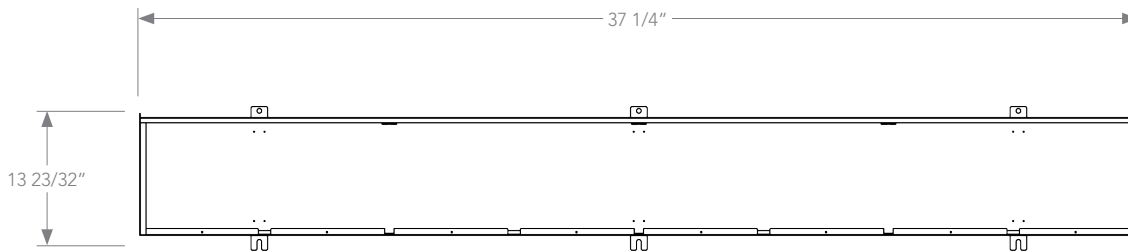

K6531-14

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

